

# MODEL TL-5104


International size reference: AA, ER14505

## TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)



|  |                 |
|--|-----------------|
| ■ Nominal capacity @ 2 mA, to 2V       | 2.1 Ah          |
| ■ Rated voltage                        | 3.6 V           |
| ■ Weight                               | 17.6g (0.62 oz) |
| ■ Volume                               | 8 cc            |
| ■ Operating temperature range          | -55°C to +85°C  |
| ■ U.L. Component Recognition, MH 12193 |                 |

**TADIRAN**  
**LITHIUM**  
**BATTERIES**

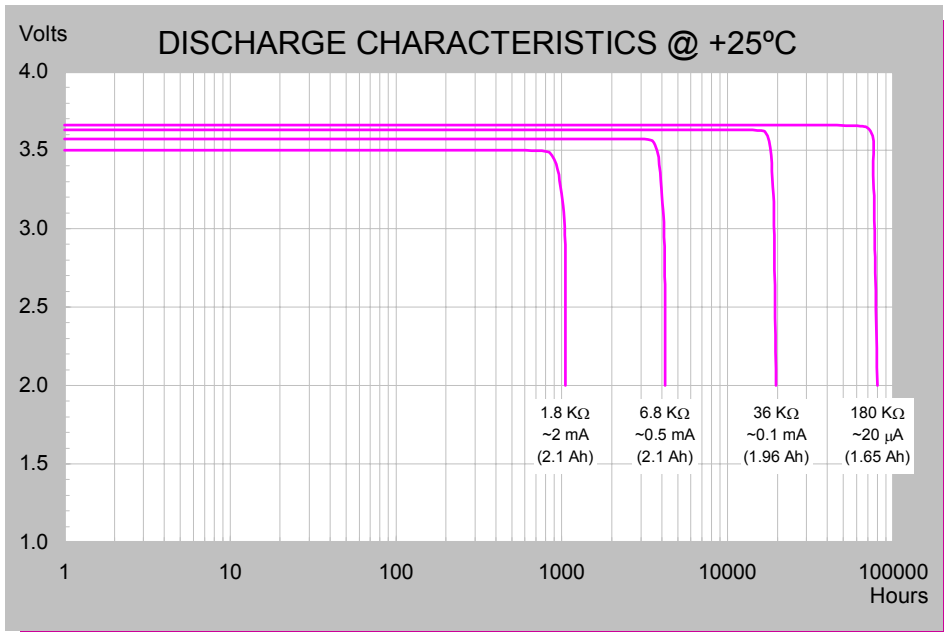

### AVAILABLE TERMINATIONS

|                            |               |
|----------------------------|---------------|
| SUFFIX- /S STANDARD        | 15-5104-21000 |
| SUFFIX- /T SOLDER TABS     | 15-5104-31000 |
| SUFFIX- /P AXIAL PINS      | 15-5104-41000 |
| SUFFIX- /PT2 RADIAL PINS   | 15-5104-36000 |
| SUFFIX- /TP POLARIZED TABS | 15-5104-52000 |
| SUFFIX- /PT POLARIZED TABS | 15-5104-53000 |

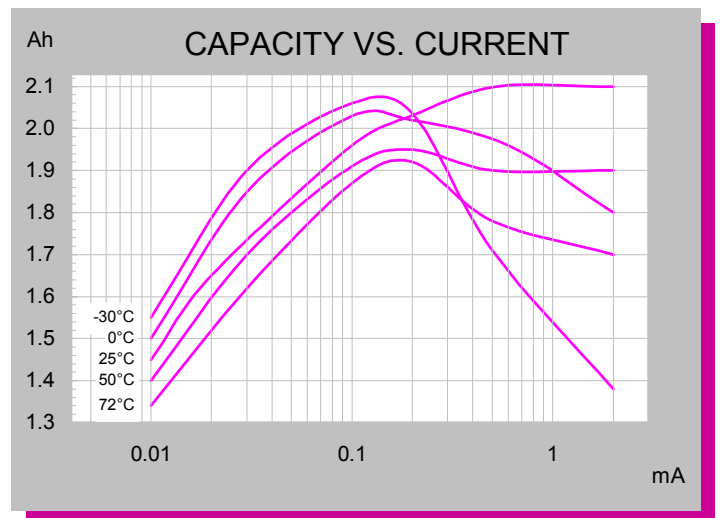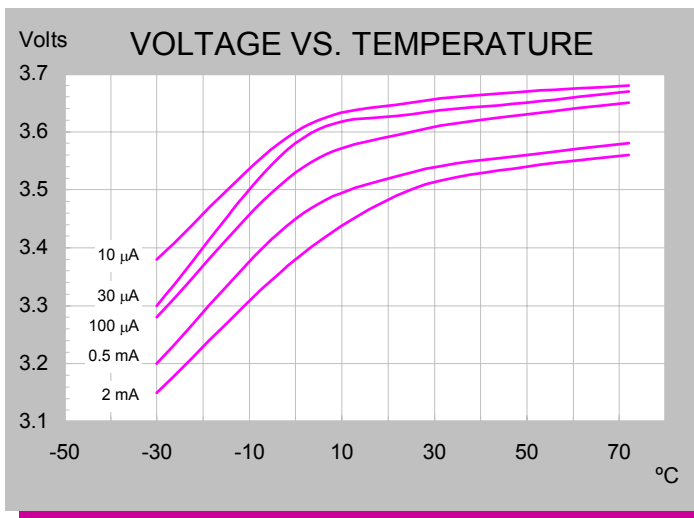

**MEMORY BACKUP**

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

Rev. B 04/03

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Electronic Battery](#) category:*

*Click to view products by [Tadiran](#) manufacturer:*

Other Similar products are found below :

[R88A-BAT02W](#) [TL5902/T](#) [76000912](#) [TL-5104/SBP](#) [PT-2100H/PT](#) [LR03AD/4P](#) [13331-0001](#) [13299-0001](#) [3G2A9BAT08](#) [R88A-BAT01G](#)

[R88A-BAT01W](#) [G4BATT32](#) [LR03AD/B](#) [LR20AD/B](#) [036506R](#) [BR-2/3ASSPN](#) [LR6AD/2P](#)