

# MODEL TL-5276/W



For Utility Metering Memory Back-up Applications

## TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




- Nominal capacity @ 1 mA, to 2V 1.0 Ah
- Rated voltage 3.6 V
- Maximum recommended continuous current 50 mA
- Maximum pulse current capability 100 mA
- Enclosure Lexan 143 UV stable
- Operating temperature range -55°C to +85°C
- U.L. Component Recognition, MH 12193

## TADIRAN LITHIUM BATTERIES

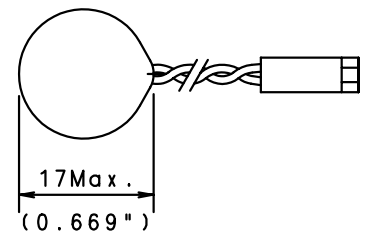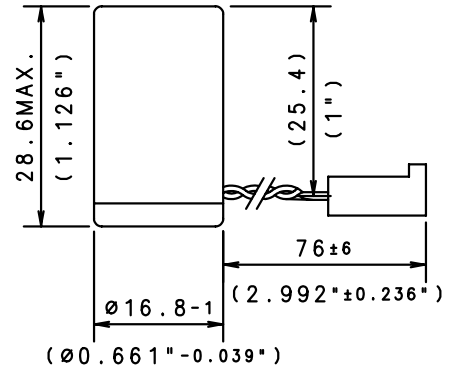

### ADDITIONAL INFORMATION

CONNECTOR TYPE MOLEX P/N 22-01-3027  
OR COMPATIBLE  
CATALOGUE NO. 15-5276-30000

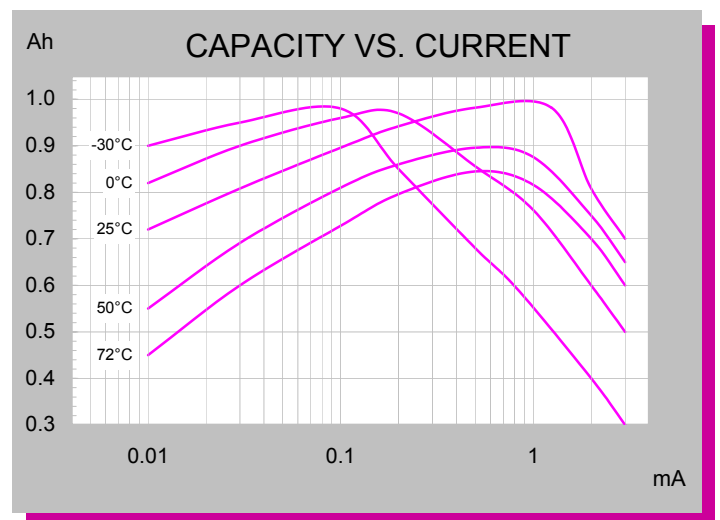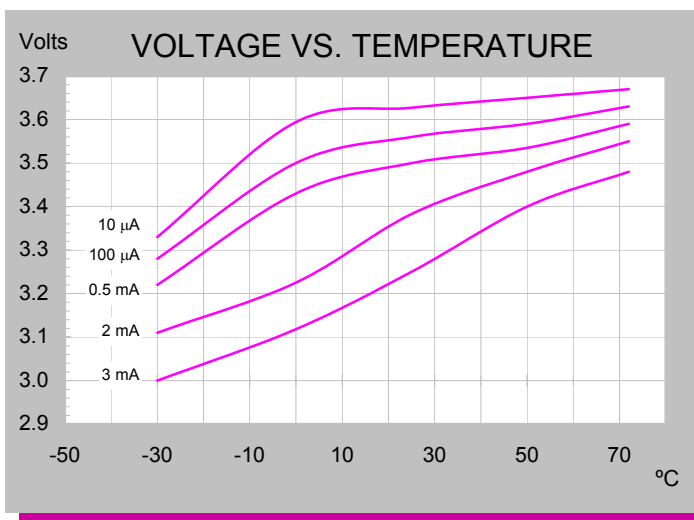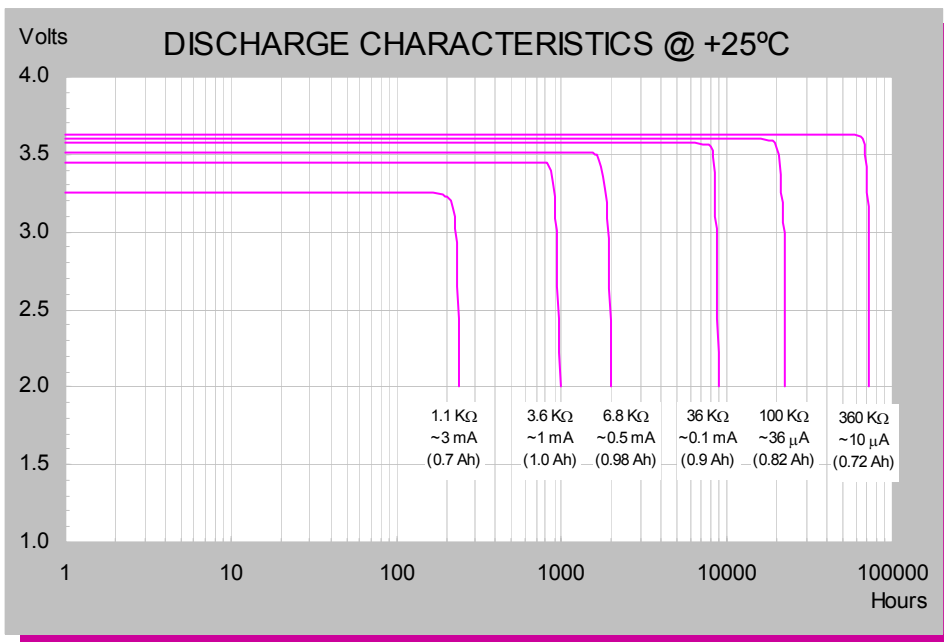

## LITHIUM XTRA

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.  
ECN 1501445 Rev. D. 01/2007

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Battery Packs](#) category:*

*Click to view products by [Tadiran](#) manufacturer:*

Other Similar products are found below :

[R101-B](#) [31000-000067-RS](#) [4600 726 406](#) [4610 726 406](#) [312G-U1](#) [4606 726 406](#) [4607 726 406](#) [ZA13](#) [LR03/AAA/MN2400\(K4\)](#) [LR03](#)  
[MAXELL S4](#) [LR1130 MAXELL B10](#) [LR14-MN1400-C K2](#) [LR1/910A](#) [LR41 MAXELL B10](#) [LR43](#) [LR43 MAXELL B10](#) [LR6 MAXELL S4](#)  
[E23A](#) [E90](#) [625302](#) [625304](#) [637871](#) [638006](#) [6LF22/9V/MN1604\(K1\)C&B](#) [6LF22/9V/MN1604 PLUS](#) [6LR61](#) [SR626SW MAXELL](#)  
[SR920SW MAXELL](#) [7K67 J](#) [220AAH-B AA](#) [GP14A S2](#) [GP 15AU ULTRA PLUS B4](#) [GP15E](#) [GP1604GLF-2UE1](#) [GP 1604 ULTRA PLUS](#)  
[GP 24AU ULTRA PLUS B4](#) [10 ET](#) [675 ET](#) [11A B5](#) [A544](#) [A76-U10](#) [13G U2](#) [4112101411](#) [4 022 211 111](#) [GP24A/FO2 SUPER](#) [GP15A/F02](#)  
[SUPER](#) [4 106 101 436](#) [4 014 211 111](#) [4 114 101 412](#) [4 020 211 111](#)