

MODEL TL-5902


International size reference: 1/2AA, ER14252

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)



| | |
|--|-----------------|
| ■ Nominal capacity @ 0.5 mA, to 2V | 1.2 Ah |
| ■ Rated voltage | 3.6 V |
| ■ Maximum recommended continuous current | 50 mA |
| ■ Maximum pulse current capability | 100 mA |
| ■ Weight | 9.2g (0.324 oz) |
| ■ Volume | 4.3 cc |
| ■ Operating temperature range | -55°C to +85°C |
| ■ U.L. Component Recognition, MH 12193 | |

TADIRAN LITHIUM BATTERIES

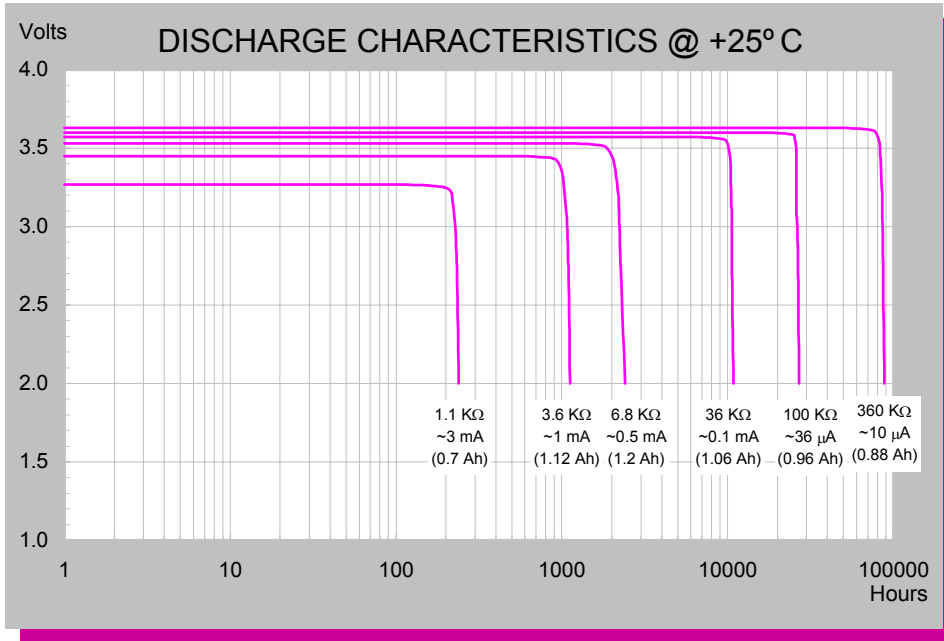

AVAILABLE TERMINATIONS

| | |
|----------------------------|---------------|
| SUFFIX- /S STANDARD | 15-5902-21500 |
| SUFFIX- /T SOLDER TABS | 15-5902-31500 |
| SUFFIX- /P AXIAL PINS | 15-5902-41500 |
| SUFFIX- /PT2 RADIAL PINS | 15-5902-36500 |
| SUFFIX- /TP POLARIZED TABS | 15-5902-52500 |
| SUFFIX- /PT POLARIZED TABS | 15-5902-53500 |

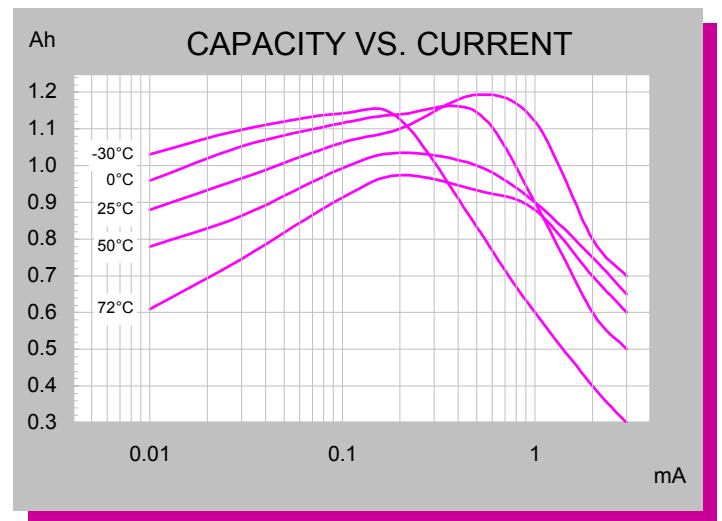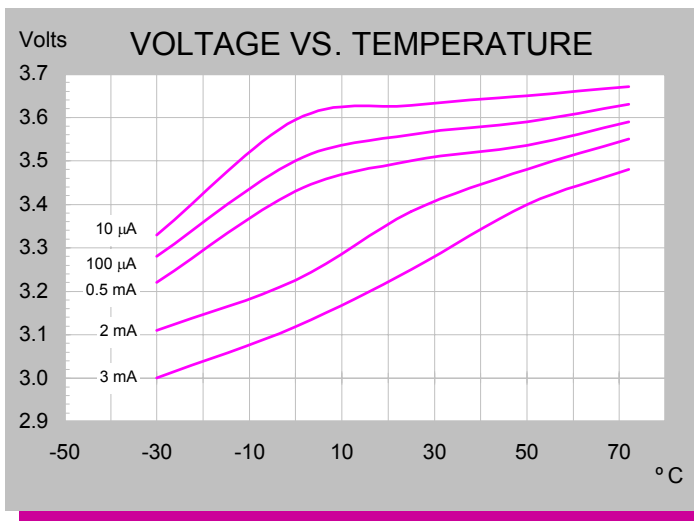

LITHIUM XTRA

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. B 03/03

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Electronic Battery](#) category:

Click to view products by [Tadiran](#) manufacturer:

Other Similar products are found below :

[R88A-BAT02W](#) [TL-5104/SBP](#) [E300781900](#) [E300782100](#) [BR-435/BN](#) [B73180A0101M199](#) [13299-0001](#) [R88A-BAT01G](#) [R88A-BAT01W](#)
[M4T32-BR12SH6](#) [LR03AD/4P](#) [13331-0001](#) [3G2A9BAT08](#) [LR03AD/B](#) [LR20AD/B](#)