

Specification for Approval

Date: 2017/9/30

**Certificate
GreenPartner**
Customer : 友仁達
TAI-TECH P/N: FCM1005KF-SERIES
CUSTOMER P/N: _____

DESCRIPTION: _____

QUANTITY: _____ pcs

| | | |
|----------------------------|--|--|
| REMARK: | | |
| Customer Approval Feedback | | |
| | | |

西北臺慶科技股份有限公司
TAI-TECH Advanced Electronics Co., Ltd

西北臺慶科技股份有限公司
 TAI-TECH Advanced Electronics Co., Ltd
 Headquarter:
 NO.1 YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI,
 TAO-YUAN HSIEN, TAIWAN, R.O.C.
 TEL: +886-3-4641148 FAX: +886-3-4643565
 http://www.tai-tech.com.tw
 E-mail: sales@tai-tech.com.tw

Sales Dep.

| | |
|-------------------|--------------------|
| APPROVED | CHECKED |
| 詹字鈞 Elven Chan | 鍾明君 Mandy Chung |

Office:
 深圳辦公室
 11BC, Building B Fortune Plaza, NO.7002, Shennan Avenue, Futian
 District Shenzhen
 TEL: +86-755-23972371 FAX: +86-755-23972340

臺慶精密電子(昆山)有限公司
 TAI-TECH ADVANCED ELECTRONICS(KUNSHAN) CO., LTD
 SHINWHA ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN,
 JIANG-SU, CHINA
 TEL: +86-512-57619396 FAX: +86-512-57619688
 E-mail: sales@tai-tech.cn

R&D Center

| | | |
|----------|---------|-------|
| APPROVED | CHECKED | DRAWN |
| 鄧福興 | 浦冬生 | 王俞琴 |

慶邦電子元器件(泗洪)有限公司
 TAIPAQ ELECTRONICS(SIHONG) CO., LTD
 JIN SHA JIANG ROAD, CONOMIC DEVELOPMENT ZONE SIHONG,
 JIANGSU, CHINA.
 TEL: +86-527-88601191 FAX: +86-527-88601190
 E-mail: sales@taipaq.cn

| | |
|-------------------------------------|------------------|
| Ferrite Chip Bead(Lead Free) | FCM1005KF-Series |
|-------------------------------------|------------------|

| ECN HISTORY LIST | | | | | |
|-------------------------|----------|--|----------|---------|-------|
| REV | DATE | DESCRIPTION | APPROVED | CHECKED | DRAWN |
| 1.0 | 13/06/06 | 變更可靠度條件 | 楊祥忠 | 羅培君 | 張嘉玲 |
| 2.0 | 14/01/24 | 變更電鍍錫層厚度 3.0um min. =>3.5um min. | 楊祥忠 | 羅培君 | 張嘉玲 |
| 3.0 | 14/03/20 | 修正包裝帶圖示 | 楊祥忠 | 羅培君 | 張嘉玲 |
| 4.0 | 14/08/01 | 變更 Reflow 圖示 | 楊祥忠 | 羅培君 | 張嘉玲 |
| 4.1 | 14/08/01 | 修正包裝帶尺寸 | 楊祥忠 | 羅培君 | 張嘉玲 |
| 5.0 | 16/01/26 | 增訂可靠度 Thermal shock: (Bead) Step3 : 125±2°C 30±5min | 楊祥忠 | 詹偉特 | 張嘉玲 |
| 6.0 | 17/02/16 | 修訂 Recommended PC Board Pattern | 楊祥忠 | 詹偉特 | 張嘉玲 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| 備 註 | | | | | |

Ferrite Chip Bead(Lead Free)

FCM1005KF-Series


1.Features

1. Monolithic inorganic material construction.
2. Closed magnetic circuit avoids crosstalk.
3. S.M.T. type.
4. Suitable for reflow soldering.
5. Shapes and dimensions follow E.I.A. spec.
6. Available in various sizes.
7. Excellent solder ability and heat resistance.
8. High reliability.
9. 100% Lead(Pb) & Halogen-Free and RoHS compliant.



Certificate
of
GreenPartner

2.Dimensions




| Chip Size | |
|-----------|-----------|
| A | 1.00±0.10 |
| B | 0.50±0.10 |
| C | 0.50±0.10 |
| D | 0.25±0.10 |

Units: mm

3.Part Numbering

FCM 1005 KF - 121 T 01
A B C D E F

- A: Series
 B: Dimension L x W
 C: Material Lead Free Material
 D: Impedance 121=120Ω
 E: Packaging T=Taping and Reel, B=Bulk(Bags)
 F: Rated Current 01=100mA

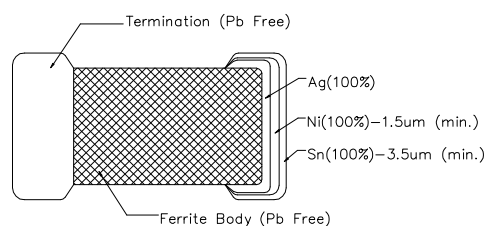

4.Specification


| Tai-Tech Part Number | Impedance (Ω) | Test Frequency (MHz) | DC Resistance (Ω) max. | Rated Current (mA) max. |
|----------------------|---------------|----------------------|------------------------|-------------------------|
| FCM1005KF-300T03 | 30±25% | 100 | 0.20 | 300 |
| FCM1005KF-600T03 | 60±25% | 100 | 0.25 | 300 |
| FCM1005KF-121T01 | 120±25% | 100 | 0.30 | 100 |
| FCM1005KF-151T01 | 150±25% | 100 | 0.30 | 100 |
| FCM1005KF-221T01 | 220±25% | 100 | 0.40 | 100 |
| FCM1005KF-301T01 | 300±25% | 100 | 0.50 | 100 |
| FCM1005KF-471T01 | 470±25% | 100 | 0.65 | 100 |
| FCM1005KF-601T00 | 600±25% | 100 | 0.80 | 80 |
| FCM1005KF-102T00 | 1000±25% | 100 | 1.20 | 50 |

- Rated current: based on temperature rise test
- In compliance with EIA 595

5. Reliability and Test Condition


| Item | Performance | | | | | Test Condition | | | | | | | | | | | | | | | |
|------------------------------------|--|--------------------------|-----------|-----------------------------|-----|--|------|------------------|--------------------------|-----------|-----------------------------|-----|----|----|-----------|------|------|----|----|-----------|------|
| | FCB | FCM | HCB | GHB | FCA | | | | | | | | | | | | | | | | |
| Series No. | FCB | FCM | HCB | GHB | FCA | -- | | | | | | | | | | | | | | | |
| Operating Temperature | -40~+125°C (Including self-temperature rise) | | | | | -- | | | | | | | | | | | | | | | |
| Transportation Storage Temperature | -40~+125°C (on board) | | | | | For long storage conditions, please see the Application Notice | | | | | | | | | | | | | | | |
| Impedance (Z) | Refer to standard electrical characteristics list | | | | | Agilent4291 Agilent E4991 Agilent4287 Agilent16192 | | | | | | | | | | | | | | | |
| DC Resistance | | | | | | Agilent 4338 | | | | | | | | | | | | | | | |
| Rated Current | | | | | | DC Power Supply Over Rated Current requirements, there will be some risk | | | | | | | | | | | | | | | |
| Temperature Rise Test | Rated Current < 1A ΔT 20°CMax Rated Current ≧ 1A ΔT 40°CMax | | | | | 1. Applied the allowed DC current. 2. Temperature measured by digital surface thermometer. | | | | | | | | | | | | | | | |
| Life test | Appearance: no damage. | | | | | Preconditioning: Run through IR reflow for 2 times.(IPC/JEDEC J-STD-020D Classification Reflow Profiles) Temperature: 125±2°C Applied current: rated current. Duration: 1000±12hrs. Measured at room temperature after placing for 24±2 hrs. | | | | | | | | | | | | | | | |
| Load Humidity | Impedance: within±15%of initial value. Inductance: within±10%of initial value. Q : Shall not exceed the specification value. RDC : within ±15% of initial value and shall not exceed the specification value | | | | | Preconditioning: Run through IR reflow for 2 times.(IPC/JEDEC J-STD-020D Classification Reflow Profiles) Humidity: 85±2%R.H. Temperature: 85±2°C. Duration: 1000hrs Min. with 100% rated current. Measured at room temperature after placing for 24±2 hrs. | | | | | | | | | | | | | | | |
| Thermal shock | Appearance: no damage. Impedance: within±15%of initial value. Inductance: within±10%of initial value. Q : Shall not exceed the specification value. RDC : within ±15% of initial value and shall not exceed the specification value | | | | | Preconditioning: Run through IR reflow for 2 times.(IPC/JEDEC J-STD-020D Classification Reflow Profiles) Condition for 1 cycle Step1: -40±2°C 30±5 min. Step2: 25±2°C ≧0.5min Step3: +125±2°C 30±5min. Number of cycles: 500 Measured at room temperature after placing for 24±2 hrs. | | | | | | | | | | | | | | | |
| Vibration | Appearance : No damage. Impedance : within±15% of initial value Inductance : within±10% of initial value Q : Shall not exceed the specification value. RDC : within ±15% of initial value and shall not exceed the specification value | | | | | Preconditioning: Run through IR reflow for 2 times.(IPC/JEDEC J-STD-020D Classification Reflow Profiles) Oscillation Frequency: 10 ~ 2K ~ 10Hz for 20 minutes Equipment : Vibration checker Total Amplitude:1.52mm±10% Testing Time : 12 hours(20 minutes, 12 cycles each of 3 orientations) - | | | | | | | | | | | | | | | |
| Bending | Appearance : No damage. Impedance : within±10% of initial value Inductance : within±10% of initial value Q : Shall not exceed the specification value. RDC : within ±15% of initial value and shall not exceed the specification value | | | | | Shall be mounted on a FR4 substrate of the following dimensions: >=0805inch(2012mm):40x100x1.2mm <0805inch(2012mm):40x100x0.8mm Bending depth: >=0805inch(2012mm):1.2mm <0805inch(2012mm):0.8mm Duration of 10 sec for a min. | | | | | | | | | | | | | | | |
| Shock | Appearance : No damage. Impedance : within±10% of initial value Inductance : within±10% of initial value Q : Shall not exceed the specification value. RDC : within ±15% of initial value and shall not exceed the specification value | | | | | Test condition: <table border="1"> <thead> <tr> <th>Type</th> <th>Peak Value (g's)</th> <th>Normal duration (D) (ms)</th> <th>Wave form</th> <th>Velocity change (Vi)/ft/sec</th> </tr> </thead> <tbody> <tr> <td>SMD</td> <td>50</td> <td>11</td> <td>Half-sine</td> <td>11.3</td> </tr> <tr> <td>Lead</td> <td>50</td> <td>11</td> <td>Half-sine</td> <td>11.3</td> </tr> </tbody> </table> | Type | Peak Value (g's) | Normal duration (D) (ms) | Wave form | Velocity change (Vi)/ft/sec | SMD | 50 | 11 | Half-sine | 11.3 | Lead | 50 | 11 | Half-sine | 11.3 |
| Type | Peak Value (g's) | Normal duration (D) (ms) | Wave form | Velocity change (Vi)/ft/sec | | | | | | | | | | | | | | | | | |
| SMD | 50 | 11 | Half-sine | 11.3 | | | | | | | | | | | | | | | | | |
| Lead | 50 | 11 | Half-sine | 11.3 | | | | | | | | | | | | | | | | | |
| Solderability | More than 95% of the terminal electrode should be covered with solder. | | | | | Preheat: 150°C,60sec. Solder: Sn96.5%-Ag3%-Cu0.5% Solder temperature: 245±5°C Flux for lead free: Rosin. 9.5% Depth: completely cover the termination. Dip time: 4±1sec. | | | | | | | | | | | | | | | |

| Item | Performance | Test Condition | | | | | | |
|---------------------------------|--|---|------------------|--|--|----------------------|-------|----------------|
| Resistance to Soldering Heat | Appearance : No damage. Impedance : within±15% of initial value Inductance : within±10% of initial value Q : Shall not exceed the specification value. RDC : within ±15% of initial value and shall not exceed the specification value | Number of heat cycles: 1 <table border="1"> <tr> <th>Temperature (°C)</th> <th>Time (s)</th> <th>Temperature ramp/immersion and emersion rate</th> </tr> <tr> <td>260 ±5 (solder temp)</td> <td>10 ±1</td> <td>25mm/s ±6 mm/s</td> </tr> </table> Depth: completely cover the termination | Temperature (°C) | Time (s) | Temperature ramp/immersion and emersion rate | 260 ±5 (solder temp) | 10 ±1 | 25mm/s ±6 mm/s |
| | | Temperature (°C) | Time (s) | Temperature ramp/immersion and emersion rate | | | | |
| 260 ±5 (solder temp) | 10 ±1 | 25mm/s ±6 mm/s | | | | | | |
| Terminal strength | Appearance : No damage. Impedance : within±15% of initial value Inductance : within±10% of initial value Q : Shall not exceed the specification value. RDC : within ±15% of initial value and shall not exceed the specification value | Preconditioning: Run through IR reflow for 2 times.(IPC/JEDEC J-STD-020D Classification Reflow Profiles) Component mounted on a PCB apply a force >0.805inch(2012mm):1kg <=0.805inch(2012mm):0.5kg to the side of a device being tested. This force shall be applied for 60 +1 seconds. Also the force shall be applied gradually as not to shock the component being tested. | | | | | | |



****Derating Curve**



For the ferrite chip bead which withstanding current over 1.5A, as the operating temperature over 85°C, the derating current information is necessary to consider with. For the detail derating of current, please refer to the Derated Current vs. Operating Temperature curve.

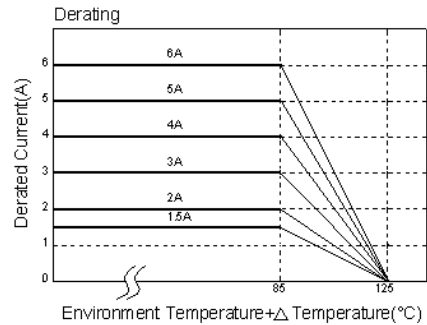

6.Soldering and Mounting

6-1. Recommended PC Board Pattern

| Series | Type | Chip Size | | | | Land Patterns For Reflow Soldering | | |
|--------|------|-----------|-----------|-----------|-----------|------------------------------------|-------|-------|
| | | A(mm) | B(mm) | C(mm) | D(mm) | E(mm) | F(mm) | G(mm) |
| FCB | 0603 | 0.6±0.03 | 0.30±0.03 | 0.30±0.03 | 0.15±0.05 | 0.35 | 0.30 | 0.40 |
| | 1005 | 1.0±0.10 | 0.50±0.10 | 0.50±0.10 | 0.25±0.10 | 0.50 | 0.40 | 0.60 |
| FCM | 1608 | 1.6±0.15 | 0.80±0.15 | 0.80±0.15 | 0.30±0.20 | 0.80 | 0.85 | 0.95 |
| HCB | 2012 | 2.0±0.20 | 1.25±0.20 | 0.85±0.20 | 0.50±0.30 | 1.05 | 1.00 | 1.45 |
| GHB | | 2.0±0.20 | 1.25±0.20 | 1.25±0.20 | 0.50±0.30 | | | |
| FCI | 3216 | 3.2±0.20 | 1.60±0.20 | 1.10±0.20 | 0.50±0.30 | 1.05 | 2.20 | 1.80 |
| FHI | 3225 | 3.2±0.20 | 2.50±0.20 | 1.30±0.20 | 0.50±0.30 | 1.05 | 2.20 | 2.70 |
| FCH | 4516 | 4.5±0.20 | 1.60±0.20 | 1.60±0.20 | 0.50±0.30 | 1.05 | 3.30 | 1.80 |
| HCI | 4532 | 4.5±0.20 | 3.20±0.20 | 1.50±0.20 | 0.50±0.30 | 1.05 | 3.30 | 3.40 |

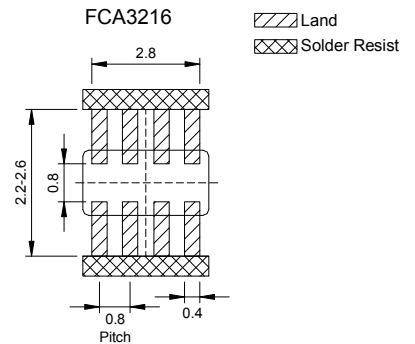

PC board should be designed so that products can prevent damage from mechanical stress when warping the board.

6-2. Soldering

Mildly activated rosin fluxes are preferred. The terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

Note.

If wave soldering is used ,there will be some risk.

Re-flow soldering temperatures below 240 degrees, there will be non-wetting risk


6-2.1 Lead Free Solder re-flow:

Recommended temperature profiles for lead free re-flow soldering in Figure 1. (Referred to J-STD-020C)


6-2.2 Soldering Iron:

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. If a soldering iron must be employed the following precautions are recommended. for Iron Soldering in Figure 2.

- Preheat circuit and products to 150°C
- Never contact the ceramic with the iron tip
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- 350°C tip temperature (max)
- 1.0mm tip diameter (max)
- Limit soldering time to 4~5sec.

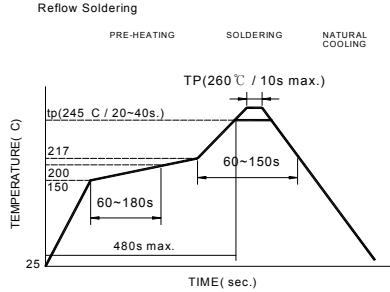

Reflow times: 3 times max
Fig.1

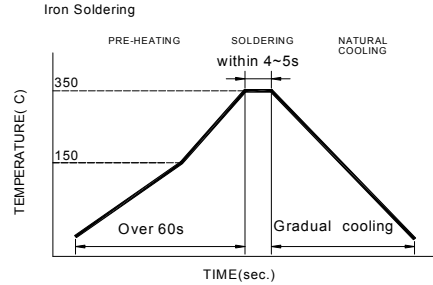


Iron Soldering times : 1 times max
Fig.2

6-2.3 Solder Volume:


Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceed as shown in right side:

Minimum fillet height = soldering thickness + 25% product height

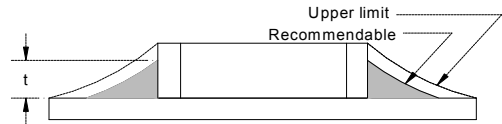

7.Packaging Information


7-1. Reel Dimension

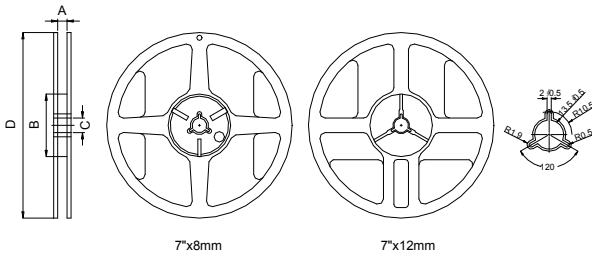


| Type | A(mm) | B(mm) | C(mm) | D(mm) |
|---------|----------|-------|----------|-------|
| 7"x8mm | 9.0±0.5 | 60±2 | 13.5±0.5 | 178±2 |
| 7"x12mm | 13.5±0.5 | 60±2 | 13.5±0.5 | 178±2 |

7-2.1 Tape Dimension / 8mm

Material of taping is paper

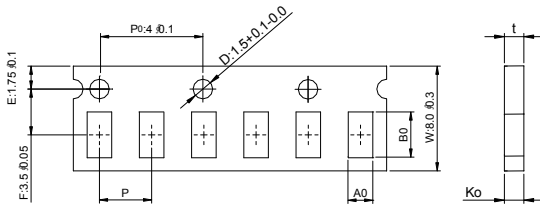


| Size | Bo(mm) | Ao(mm) | Ko(mm) | P(mm) | t(mm) |
|--------|-----------|-----------|-----------|----------|-----------|
| 060303 | 0.70±0.06 | 0.40±0.06 | 0.45max | 2.0±0.05 | 0.45max |
| 100505 | 1.12±0.03 | 0.62±0.03 | 0.60±0.03 | 2.0±0.05 | 0.60±0.03 |

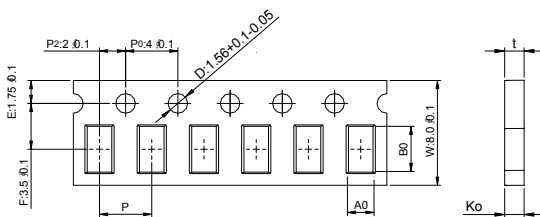


| Size | Bo(mm) | Ao(mm) | Ko(mm) | P(mm) | t(mm) |
|--------|-----------|-----------------|-----------|----------|-----------|
| 160808 | 1.80±0.05 | 0.96+0.05/-0.03 | 0.95±0.05 | 4.0±0.10 | 0.95±0.05 |
| 201209 | 2.10±0.05 | 1.30±0.05 | 0.95±0.05 | 4.0±0.10 | 0.95±0.05 |

Material of taping is plastic

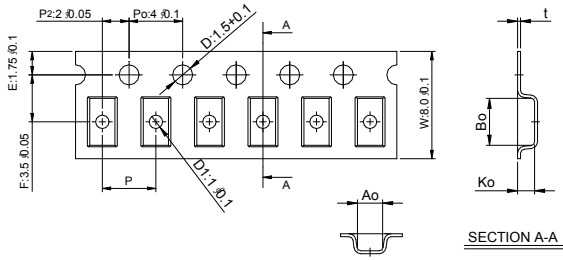

| Size | Bo(mm) | Ao(mm) | Ko(mm) | P(mm) | t(mm) | D1(mm) |
|--------|-----------|-----------|-----------|----------|-----------|----------|
| 201212 | 2.10±0.10 | 1.28±0.10 | 1.28±0.10 | 4.0±0.10 | 0.22±0.05 | 1.0±0.10 |
| 321611 | 3.35±0.10 | 1.75±0.10 | 1.25±0.10 | 4.0±0.10 | 0.23±0.05 | 1.0±0.10 |
| 322513 | 3.42±0.10 | 2.77±0.10 | 1.55±0.10 | 4.0±0.10 | 0.22±0.05 | 1.0±0.10 |
| 321609 | 3.40±0.10 | 1.77±0.10 | 1.04±0.10 | 4.0±0.10 | 0.22±0.05 | 1.0±0.10 |

7-2.2 Tape Dimension / 12mm

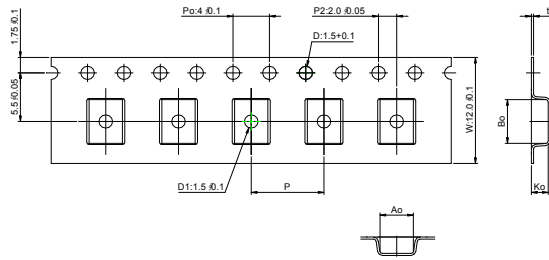


| Size | Bo(mm) | Ao(mm) | Ko(mm) | P(mm) | t(mm) | D1(mm) |
|--------|-----------|-----------|-----------|----------|-----------|----------|
| 451616 | 4.70±0.10 | 1.75±0.10 | 1.75±0.10 | 4.0±0.10 | 0.24±0.05 | 1.5±0.10 |
| 453215 | 4.70±0.10 | 3.45±0.10 | 1.60±0.10 | 8.0±0.10 | 0.24±0.05 | 1.5±0.10 |

7-3. Packaging Quantity

| Chip Size | 453215 | 451616 | 322513 | 321611 | 321609 | 201212 | 201209 | 160808 | 100505 | 060303 |
|-------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Chip / Reel | 1000 | 2000 | 2500 | 3000 | 3000 | 2000 | 4000 | 4000 | 10000 | 15000 |
| Inner box | 4000 | 8000 | 12500 | 15000 | 15000 | 10000 | 20000 | 20000 | 50000 | 75000 |
| Middle box | 20000 | 40000 | 62500 | 75000 | 75000 | 50000 | 100000 | 100000 | 250000 | 375000 |
| Carton | 40000 | 80000 | 125000 | 150000 | 150000 | 100000 | 200000 | 200000 | 500000 | 750000 |

7-4. Tearing Off Force

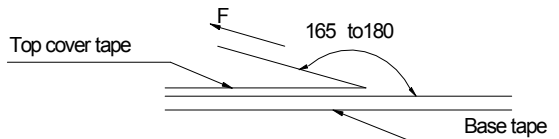


The force for tearing off cover tape is 15 to 60 grams in the arrow direction under the following conditions.

| Room Temp. (°C) | Room Humidity (%) | Room atm (hPa) | Tearing Speed mm/min |
|-----------------|-------------------|----------------|----------------------|
| 5~35 | 45~85 | 860~1060 | 300 |

Application Notice

- Storage Conditions(component level)
 - To maintain the solder ability of terminal electrodes:
 - TAI-TECH products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
 - Temperature and humidity conditions: Less than 40°C and 60% RH.
 - Recommended products should be used within 12 months from the time of delivery.
 - The packaging material should be kept where no chlorine or sulfur exists in the air.
- Transportation
 - Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
 - The use of tweezers or vacuum pick up is strongly recommended for individual components.
 - Bulk handling should ensure that abrasion and mechanical shock are minimized.

Impedance Frequency Characteristics(Typical)

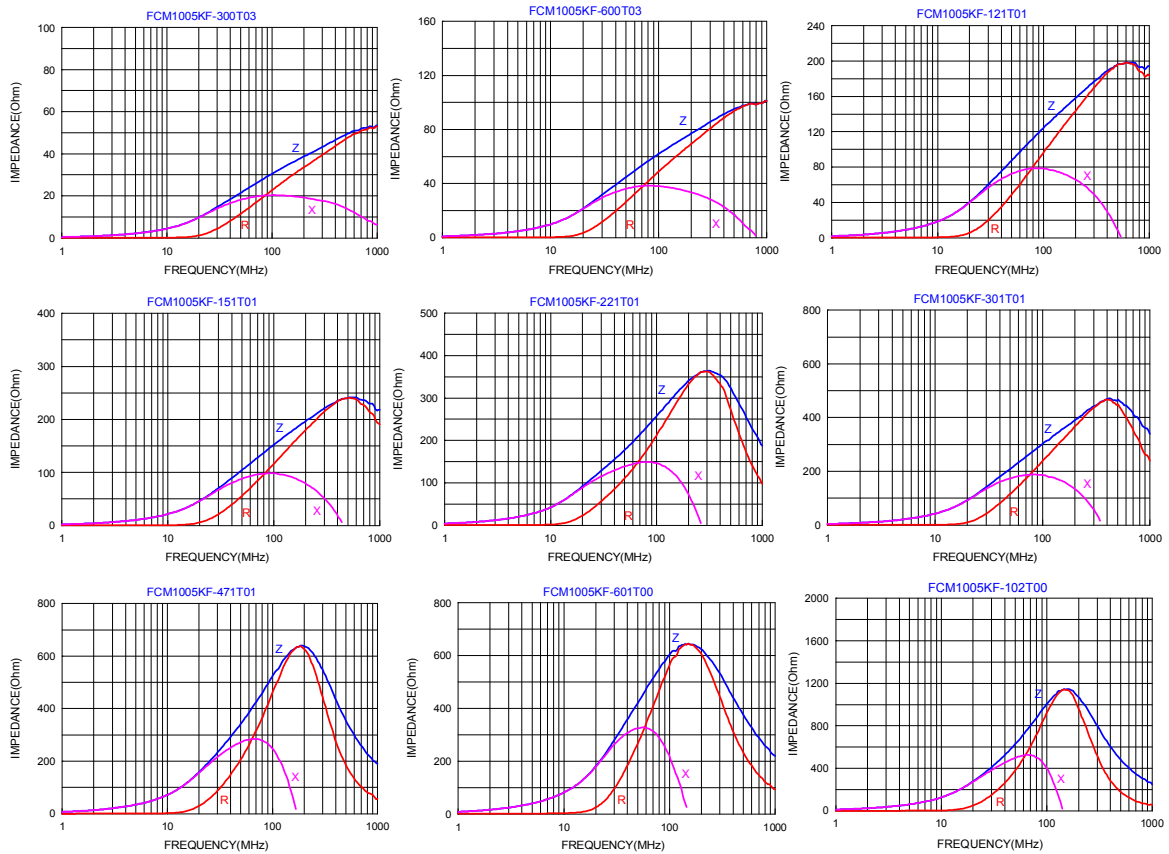

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [taitec](#) manufacturer:

Other Similar products are found below :

[TMPC1205HP-4R7MG-D](#) [TMPC0624H-4R7MG-D](#) [TMPC0402HP-R10YG-Z02](#) [TMPC0502HP-R68MG-D](#) [TMPC0518HP-R47MG-D](#)
[TMPC1707HP-3R3MG-D](#) [HPC6045NF-1R0M](#) [TMPA0603S-1R5MN-D](#) [TMPC1004H-470MG-D](#) [TMPC0603H-1R0MG-D](#) [HPC5020CF-2R2Y](#) [TMPA0603S-330MN-D](#) [HPC6045NF-100MTH](#) [TMPC0618H-1R0MG-D](#) [WCM4532F2SF-601T15](#) [TMPA0605S-4R7MN-D](#)
[TPRHC1207F-470M](#) [WCM3216F2SV-102T02](#) [TMPF0603A-3R3MN-D](#) [TMPC1265HP-100MG-D](#) [TMPC0502HP-6R8MG-D](#)
[TMPC1265HP-2R2MG-D](#) [UHP252012NF-R47M](#) [HCB3216KF-501T30](#) [AHP201610TF-R68M-1](#) [HPC5020NF-1R0Y](#) [TMPC0412HP-R12MG-Z03](#) [TMPC1206HP-101MG-D](#) [HPC5040NF-3R3M](#) [HPC8040NF-8R2M](#) [TMPC1205HP-330MG-D](#) [TMPA1206SP-100MN-D](#)
[UHP252012NF-1R0MT01](#) [HPC5040NF-2R2M](#) [HSF2012F2SF-670T04](#) [TMPC1235HP-2R2MG-D](#) [TMPC1004H-1R0MG-D](#) [TMPA1004S-1R0MN-D](#) [TMPC0615H-220MG-D](#) [DFP201610TF-R47M](#) [AHP201610AF-2R2M](#) [TMPC0512HP-4R7MG-D](#) [TMPC0602H-220MG-D](#)
[WCM3216F2SF-102T02](#) [TMPC0624H-R22MG-D](#) [TMPC1265HP-R82MG-D](#) [TMPC0603H-6R8MG-D](#) [FCM2012CF-600T07](#) [FCM2012CF-221T04](#) [FCI2012F-R12K](#)