



Specification for Approval

Date: 2018/4/17

HCB1005KF-301T10







<u>Customer</u>	:	深圳台慶

TAI-TECH P/N:

	CUSTOMER P/N:		
	DESCRIPTION:		
	QUANTITY:	pcs	; _
REM	MARK:		
	Cı	ıstomer Approval Feedba	nok
		istomet Approvat Feedba	ICK

西北臺慶科技股份有限公司 TAI-TECH Advanced Electronics Co., Ltd

□西北臺慶科技股份有限公司

TAI-TECH Advanced Electronics Co., Ltd Headquarter:

NO.1 YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN HSIEN, TAIWAN, R.O.C.

TEL: +886-3-4641148 FAX: +886-3-4643565

http://www.tai-tech.com.tw E-mail: sales@tai-tech.com.tw

□Office:

深圳辦公室

11BC, Building B Fortune Plaza, NO. 7002, Shennan Avenue, Futian District Shenzhen

TEL: +86-755-23972371 FAX: +86-755-23972340

■臺慶精密電子(昆山)有限公司

TAI-TECH ADVANCED ELECTRONICS(KUNSHAN) CO., LTD SHINWHA ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA

TEL: +86-512-57619396 FAX: +86-512-57619688

E-mail: sales@tai-tech.cn

□慶邦電子元器件(泗洪)有限公司

TAIPAQ ELECTRONICS (SIHONG) CO., LTD JIN SHA JIANG ROAD, CONOMIC DEVELOPMENT ZONE SIHONG, JIANGSU , CHINA.
TEL: +86-527-88601191 FAX: +86-527-88601190

E-mail: sales@taipaq.cn

Sales Dep.

CHECKED
劉瑷瑄 Aries Liu

R&D Center

APPROVED	CHECKED	DRAWN
鄧福興	浦冬生	王俞琴

High Current Ferrite Chip Bead(Lead Free)

HCB1005KF-301T10

REV	DATE	DESCRIPTION	APPROVED	CHECKED	DRAW
1.0	13/06/06	變更可靠度條件	楊祥忠	羅培君	張嘉玲
2.0	14/01/24	變更電鍍錫層厚度 3.0um min.=>3.5um min.	楊祥忠	羅培君	張嘉玲
3.0	14/03/20	修正包裝帶圖示	楊祥忠	羅培君	張嘉玲
4.0	14/08/01	變更 Reflow 圖示	楊祥忠	羅培君	張嘉玲
4.1	14/08/01	修正包裝帶尺寸	楊祥忠	羅培君	張嘉玲
5.0	16/01/26	增訂可靠度 Thermal shock: (Bead) Step3:125±2℃ 30±5min	楊祥忠	詹偉特	張嘉玲
6.0	17/02/16	修訂 Recommended PC Board Pattern	楊祥忠	詹偉特	張嘉玲
備			•		
NH					

TAI-TECH KBM01-180400359 P2.

High Current Ferrite Chip Bead(Lead Free)

HCB1005KF-301T10


Certificate

Green Partner

1.Features

- 1. Monolithic inorganic material construction.
- 2. Closed magnetic circuit avoids crosstalk.
- 3. Suitable for reflow soldering.
- 4. Shapes and dimensions follow E.I.A. spec.
- 5. Available in various sizes.
- 6. Excellent solder ability and heat resistance.
- 7. High reliability.
- 8.100% Lead(Pb) & Halogen-Free and RoHS compliant.
- 9. Low DC resistance structure of electrode to prevent wasteful electric power consumption.

2.Dimensions



Chip Size				
Α	1.00±0.10			
В	0.50±0.10			
С	0.50±0.10			
D	0.25±0.10			


Units: mm

3.Part Numbering



E: Packaging T=Taping and Reel, B=Bulk(Bags)

F: Rated Current 10=1000mA

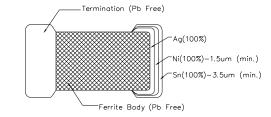


4. Specification

Tai-Tech Part Number	Impedance (Ω)	Test Frequency (Hz)	DC Resistance (Ω) max.	Rated Current (mA) max.
HCB1005KF-301T10	300±25%	60mV/100M	0.20	1000

- Rated current: based on temperature rise test
- In compliance with EIA 595

■ Impedance-Frequency Characteristics

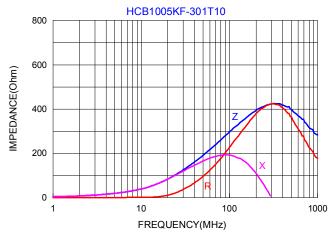

www.tai-tech.com.tw

TAI-TECH KBM01-180400359 P3.


5. Reliability and Test Condition

Item			Performance				Te	st Cond	dition	
Series No.	FCB	FCM	<mark>HCB</mark>	GHB	FCA					
Operating Temperature		(Includir	-40~+125℃ ng self-temperat	ure rise)						
Transportation Storage Temperature			-40~+125℃ (on board)			For long			ns, please	see the
Impedance (Z)	Pefer to standard	alactrical abo	ara eto riotico liot			Agilent42 Agilent E Agilent42 Agilent16	287			
DC Resistance	Refer to standard	electrical cha	iracteristics list			Agilent 4				
Rated Current						DC Powe Over Rat some ris	ted Curr		ements, the	re will be
Temperature Rise Test	Rated Current < 1A A Rated Current ≥ 1A					2. Tempe		owed DC neasured	current. by digital su	ırface
Life test	Appearance: no d	±15%of initia				times.(If Reflow F Tempera Applied of Duration Measure for 24±2	PC/JEDI Profiles) ture: 12 current: : 1000± d at ro hrs.	EC J-STD 5±2℃ rated curn 12hrs. om tempe	ugh IR refl -020D Clas ent. rature after	sification
Load Humidity	Q : Shall not exce	Inductance: within±10%of initial value. Q: Shall not exceed the specification value. RDC: within ±15% of initial value and shall not exceed the specification value				times.(IPC/JEDEC J-STD-020D Classification Reflow Profiles) Humidity: 85±2°R.H. Temperature: 85±2°C. Duration: 1000hrs Min. with 100% rated current. Measured at room temperature after placing for 24±2 hrs.				
Thermal shock	Appearance: no damage. Impedance: within±15%of initial value. Inductance: within±10%of initial value. Q: Shall not exceed the specification value. RDC: within ±15% of initial value and shall not exceed the specification value				Preconditioning: Run through IR reflow for 2 times.(IPC/JEDEC J-STD-020D Classification Reflow Profiles) Condition for 1 cycle Step1: -40±2°C 30±5 min. Step2: 25±2°C ≤0.5min Step3: +125±2°C 30±5min. Number of cycles: 500 Measured at room temperature after placing for 24±2 hrs.					
Vibration	Appearance: No Impedance: withi Inductance: withi Q: Shall not exce	n±15% of init n±10% of init ed the specif	ial value ication value.	t exceed the spe	cification value	times.(If Reflow F Oscillation minutes Equipme Total Am	PC/JEDI Profiles) on Frequent: Vil ent: Vil plitude:	EC J-STD uency: 10 oration che 1.52mm±1 2 hours(20		sification z for 20
Bending	Appearance: No Impedance: withi Inductance: withi Q: Shall not exce	n±10% of init n±10% of init ed the specif	ial value ication value.	t exceed the spe	ecification value	following >=0805in <0805in Bending >=0805in <0805in	dimens nch(2012 ch(2012 depth: nch(2012	ions: 2mm):40x	m	
						Test co	ndition			
Shock	Appearance : No Impedance : withi Inductance : withi	n±10% of init n±10% of init	ial value			Туре	Peak Value (g's)	Normal duration (D) (ms)	Wave form	Velocity change (Vi)ft/sec
	Q : Shall not exce RDC : within ±159			t exceed the spe	ecification value	SMD	50	11	Half-sine	11.3
						Lead	50	11	Half-sine	11.3
Solderability	More than 95% of	the terminal e	electrode should	l be covered with	n solder.	Solder to Flux for I	Sn96.5% emperati ead free omplete	-Ag3%-C ure: 245±5 : Rosin. 9 ly cover th	°C	on.

Item	Performance	Test Condition			
			Number of heat	cycles: 1	
Resistance to Soldering	Appearance : No damage. Impedance : within±15% of initial value		Temperature (°C)	Time (s)	Temperature ramp/immersion and emersion rate
Heat	Inductance: within±10% of initial value Q: Shall not exceed the specification value. RDC: within ±15% of initial value and shall not exceed	260 ±5 (solder temp)	10 ±1	25mm/s ±6 mm/s	
		Depth: completely cover the termination			
Terminal strength	Appearance: No damage. Impedance: within±15% of initial value Inductance: within±10% of initial value Q: Shall not exceed the specification value. RDC: within±15% of initial value and shall not exceed the specification value	times.(IPC/JED) Reflow Profiles) Component mov >0805inch(2012 <=0805inch(201 to the side of a of shall be applied	unted on a mm):1kg 2mm):0.5 device bei I for 60 +	ng tested. This force 1 seconds. Also the dually as not to shock	

**Derating Curve


For the ferrite chip bead which withstanding current over 1.5A, as the operating temperature over $85^{\circ}\mathbb{C}$, the derating current information is necessary to consider with. For the detail derating of current, please refer to the Derated Current vs. Operating Temperature curve.




6. Soldering and Mounting

6-1. Recommended PC Board Pattern

	Chip Size							s For ering	
Series	Type	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	
	0603	0.6±0.03	0.30±0.03	0.30±0.03	0.15±0.05	0.35	0.30	0.40	
FCB	<mark>1005</mark>	<mark>1.0±0.10</mark>	<mark>0.50±0.10</mark>	<mark>0.50±0.10</mark>	0.25±0.10	<mark>0.50</mark>	<mark>0.40</mark>	<mark>0.60</mark>	
FCM	1608	1.6±0.15	0.80±0.15	0.80±0.15	0.30±0.20	0.80	0.85	0.95	
HCB	2012	2.0±0.20	1.25±0.20	0.85±0.20	0.50±0.30	4.05	1.00	1.00	1.45
GHB	2012	2.0±0.20	1.25±0.20	1.25±0.20	0.50±0.30	1.05		1.45	
FCI FHI	3216	3.2±0.20	1.60±0.20	1.10±0.20	0.50±0.30	1.05	2.20	1.80	
FCH	3225	3.2±0.20	2.50±0.20	1.30±0.20	0.50±0.30	1.05	2.20	2.70	
HCI	4516	4.5±0.20	1.60±0.20	1.60±0.20	0.50±0.30	1.05	3.30	1.80	
1101	4532	4.5±0.20	3.20±0.20	1.50±0.20	0.50±0.30	1.05	3.30	3.40	



Land
Solder Resist



PC board should be designed so that products can prevent damage from mechanical stress when warping the board.

6-2. Soldering

Mildly activated rosin fluxes are preferred. The terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools. Note.

If wave soldering is used ,there will be some risk.

Re-flow soldering temperatures below 240 degrees, there will be non-wetting risk

TAI-TECH KBM01-180400359 P5.

6-2.1 Lead Free Solder re-flow:

Recommended temperature profiles for lead free re-flow soldering in Figure 1. (Refered to J-STD-020C)

6-2.2 Soldering Iron:

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. If a soldering iron must be employed the following precautions are recommended. for Iron Soldering in Figure 2.


• Preheat circuit and products to 150℃

• 350 $^{\circ}$ C tip temperature (max)


Never contact the ceramic with the iron tip

• 1.0mm tip diameter (max)

- Use a 20 watt soldering iron with tip diameter of 1.0mm
- Limit soldering time to 4~5sec.



Reflow times: 3 times max Fig.1



Iron Soldering times: 1 times max

6-2.3 Solder Volume:


Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceed as shown in right side:

Minimum fillet height = soldering thickness + 25% product height



7. Packaging Information


7-1. Reel Dimension

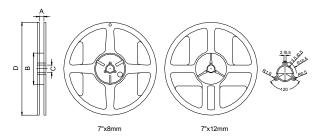

Туре	Type A(mm)		pe A(mm) B(mm)		C(mm)	D(mm)	
<mark>7"x8mm</mark>	9.0±0.5	60±2	13.5±0.5	178±2			
7"x12mm	13.5±0.5	60±2	13.5±0.5	178±2			

7-2.1 Tape Dimension / 8mm

■Material of taping is paper

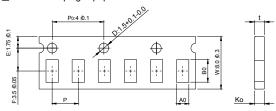


	P22.0.1 P04.0.1 91,950,11,005	- t -
E:1.75.0.1		
E.	P A0	Ko

Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)
060303	0.70±0.06	0.40±0.06	0.45max	2.0±0.05	0.45max
<mark>100505</mark>	1.12±0.03	<mark>0.62±0.03</mark>	<mark>0.60±0.03</mark>	<mark>2.0±0.05</mark>	<mark>0.60±0.03</mark>

Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)
160808	1.80±0.05	0.96+0.05/-0.03	0.95±0.05	4.0±0.10	0.95±0.05
201209	2.10±0.05	1.30±0.05	0.95±0.05	4.0±0.10	0.95±0.05


TAI-TECH KBM01-180400359 P6.

■Material of taping is plastic

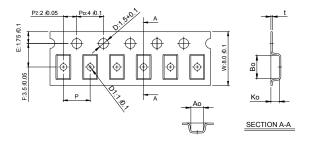

Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)	D1(mm)
201212	2.10±0.10	1.28±0.10	1.28±0.10	4.0±0.10	0.22±0.05	1.0±0.10
321611	3.35±0.10	1.75±0.10	1.25±0.10	4.0±0.10	0.23±0.05	1.0±0.10
322513	3.42±0.10	2.77±0.10	1.55±0.10	4.0±0.10	0.22±0.05	1.0±0.10
321609	3.40±0.10	1.77±0.10	1.04±0.10	4.0±0.10	0.22±0.05	1.0±0.10

7-2.2 Tape Dimension / 12mm

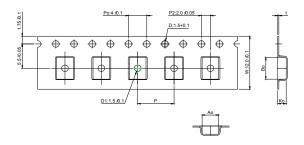


	Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)	D1(mm)
	451616	4.70±0.10	1.75±0.10	1.75±0.10	4.0±0.10	0.24±0.05	1.5±0.10
•	453215	4.70±0.10	3.45±0.10	1.60±0.10	8.0±0.10	0.24±0.05	1.5±0.10

7-3. Packaging Quantity

Chip Size	453215	451616	322513	321611	321609	201212	201209	160808	<mark>100505</mark>	060303
Chip / Reel	1000	2000	2500	3000	3000	2000	4000	4000	<mark>10000</mark>	15000
Inner box	4000	8000	12500	15000	15000	10000	20000	20000	<mark>50000</mark>	75000
Middle box	20000	40000	62500	75000	75000	50000	100000	100000	<mark>250000</mark>	375000
Carton	40000	80000	125000	150000	150000	100000	200000	200000	<mark>500000</mark>	750000

7-4. Tearing Off Force



The force for tearing off cover tape is 15 to 60 grams in the arrow direction under the following conditions.

Room Temp.	Room Humidity	Room atm	Tearing Speed	
(℃)	(%)	(hPa)	mm/min	
5~35	45~85	860~1060	300	

Application Notice

- Storage Conditions(component level)
- To maintain the solder ability of terminal electrodes:
- 1. TAI-TECH products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
- 2. Temperature and humidity conditions: Less than 40°C and 60% RH.
- 3. Recommended products should be used within 12 months from the time of delivery.
- 4. The packaging material should be kept where no chlorine or sulfur exists in the air.
- Transportation
- 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- 2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
- 3. Bulk handling should ensure that abrasion and mechanical shock are minimized.



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 1 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件(泗洪)有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P. R., CHINA)

以下測試樣品係由申請廠商所提供及確認 (The following sample(s) was/were submitted and identified by/on behalf of the applicant as):

樣品名稱(Sample Description)

: FERRITE CHIP BEAD INDUCTOR ARRAY MCF MCM YMV SERIES

樣品型號(Style/Item No.)

FERRITE CHIP BEAD INDUCTOR ARRAY MCF MCM YMV SERIES

收件日期(Sample Receiving Date)

2017/12/05

測試期間(Testing Period)

2017/12/05 TO 2017/12/12

測試結果(Test Results) :

請參閱下一頁 (Please refer to following pages).

Signed for and on being SGS TAIWAN LTD. Chemical Laboratory - Taipei

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Ferms-a



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 2 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

測試結果(Test Results)

測試部位(PART NAME)No.1

: 整體混測(MIXED ALL PARTS)

測試項目 (Test Items)	單位 (Unit)	測試方法 (Method)	方法偵測 極限値 (MDL)	結果 (Result) No.1
鍋 / Cadmium (Cd)	mg/kg	參考IEC 62321-5 (2013),以感應耦合 電漿原子發射光譜儀檢測. / With reference to IEC 62321-5 (2013) and performed by ICP-AES.	2	n. d.
鉛 / Lead (Pb)	mg/kg	参考IEC 62321-5 (2013),以感應耦合 電漿原子發射光譜儀檢測. / With reference to IEC 62321-5 (2013) and performed by ICP-AES.	2	n. d.
汞 / Mercury (Hg)	mg/kg	参考IEC 62321-4 (2013),以感應耦合 電漿原子發射光譜儀檢測. / With reference to IEC 62321-4 (2013) and performed by ICP-AES.	2	n. d.
六價絡 / Hexavalent Chromium Cr(VI) (◆)	mg/kg	参考IEC 62321-7-2 (2017),以UV-VIS 檢測;参考IEC 62321-5 (2013),以 ICP-AES檢測. / With reference to IEC 62321-7-2 (2017) and performed by UV-VIS.; With reference to IEC 62321-5 (2013) and performed by ICP-AES.	8	n. d.
銻 / Antimony (Sb)	mg/kg	参考US EPA 3052 (1996),以感應耦合 電漿原子發射光譜儀檢測. / With reference to US EPA 3052 (1996). Analysis was performed by ICP-AES.	2	n. d.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.aus.com/en/Tems.aud-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at https://www.aus.com/en/Tems.aud-Conditions/ femas-Document assay. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document: s unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 3 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO, LTD.)

(慶邦電子元器件(泗洪)有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

測試項目 (Test Items)	單位 (Unit)	测試方法 (Method)	方法偵測 極限值 (MDL)	結果 (Result) No.1
砷 / Arsenic (As)	mg/kg	参考US EPA 3052 (1996),以感應耦合電漿原子發射光譜儀檢測. / With reference to US EPA 3052 (1996). Analysis was performed by ICP-AES.	2	n. d.
皴 / Beryllium (Be)	mg/kg	参考US EPA 3052 (1996),以感應耦合 電漿原子發射光譜儀檢測. / With reference to US EPA 3052 (1996). Analysis was performed by ICP-AES.	2	n. d.
全氟辛烷磺酸 / Perfluorooctane sulfonates (PFOS-Acid, Metal Salt, Amide)	mg/kg	参考US EPA 3550C (2007),以液相層 析/質譜儀檢測. / With reference to US EPA 3550C (2007). Analysis was performed by LC/MS.	10	n, d,
全氟辛酸 / PFOA (CAS No.: 335-67-1)	mg/kg	參考US EPA 3550C (2007),以液相層 析/質譜儀檢測. / With reference to US EPA 3550C (2007). Analysis was performed by LC/MS.	10	n. d.
聚氯乙烯 / PVC	**	以紅外光譜分析及焰色法檢測. / Analysis was performed by FTIR and FLAME Test.	_	Negative
鄰苯二甲酸丁苯甲酯 / BBP (Butyl Benzyl phthalate) (CAS No.: 85-68-7)	mg/kg	# HDC 60001 0 (0017)	50	n, d.
鄰苯二甲酸二丁酯 / DBP (Dibuty1 phthalate) (CAS No.: 84-74-2)	mg/kg	参考IEC 62321-8 (2017),以氣相層析 儀/質譜儀檢測. / With reference to IEC 62321-8 (2017). Analysis was	50	n. d.
鄰苯二甲酸二 (2-乙基己基)酯 / DEHP (Di- (2-ethylhexyl) phthalate) (CAS No.: 117-81-7)	mg/kg	performed by GC/MS.	50	n. d.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sus.com/ep/Temise-200m/ep/Temise-20



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 4 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件(泗洪)有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

測試項目 (Test Items)	單位 (Unit)	測試方法 (Method)	方法偵測 極限値 (MDL)	結果 (Result) No.1
鄰苯二甲酸二異丁酯 / DIBP (Di- isobutyl phthalate) (CAS No.: 84-69- 5)	mg/kg		50	n. d.
鄰苯二甲酸二異癸酯 / DIDP (Di- isodecyl phthalate) (CAS No.: 26761- 40-0; 68515-49-1)	mg/kg		50	n. d.
鄰苯二甲酸二異壬酯 / DINP (Di- isononyl phthalate) (CAS No.; 28553- 12-0; 68515-48-0)	mg/kg	參考IEC 62321-8 (2017),以氣相層析 儀/質譜儀檢測. / With reference to IEC 62321-8 (2017). Analysis was	50	n. d.
鄰苯二甲酸二正辛酯 / DNOP (Di-n-octyl phthalate) (CAS No.: 117-84-0)	mg/kg	performed by GC/MS.	50	n. d.
鄰苯二甲酸二正己酯 / DNHP (Di-n-hexyl phthalate) (CAS No.: 84-75-3)	mg/kg		50	n. d.
鄰苯二甲酸二戊酯 / Di-n-pentyl phthalate (CAS No.: 131-18-0)	mg/kg		50	n. d.
六溴環十二烷及所有主要被辨別出的異構物 / Hexabromocyclododecane (HBCDD) and all major diastereoisomers identified (α - HBCDD, β - HBCDD, γ - HBCDD) (CAS No.: 25637-99-4 and 3194-55-6 (134237-51-7, 134237-50-6, 134237-52-8))	mg/kg	参考IEC 62321 (2008),以氣相層析/ 質譜儀檢測. / With reference to IEC 62321 (2008). Analysis was performed by GC/MS.	5	n. d.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.ags.con/ee/Farms-and-Conditions-Service-Prints-And-Conditions-Service-Prints-And-Conditions-Service-Prints-And-Conditions-Service-Prints-And-Conditions-Prints-And-Condit



Test Report

號碼(No.): CE/2017/C0633 日期(Date): 2017/12/12

頁數(Page): 5 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件(泗洪)有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

測試項目 (Test Items)	單位 (Unit)	测試方法 (Method)	方法偵測 極限值 (MDL)	結果 (Result) No.1
多溴聯苯總和 / Sum of PBBs	mg/kg			n. d.
一溴聯苯 / Monobromobiphenyl	mg/kg	Ī	5	n. d.
二溴聯苯 / Dibromobiphenyl	mg/kg	Ι Γ	5	n, d.
三溴聯苯 / Tribromobiphenyl	mg/kg	1 Γ	5	n, d,
四溴聯苯 / Tetrabromobiphenyl	mg/kg]	5	n, d,
五溴聯苯 / Pentabromobiphenyl	mg/kg		5	n. d.
六溴聯苯 / Hexabromobiphenyl	mg/kg		5	n. d.
七溴聯苯 / Heptabromobiphenyl	ng/kg		5	n. d.
八溴聯苯 / Octabromobiphenyl	mg/kg		5	n, d.
九溴聯苯 / Nonabromobiphenyl	mg/kg	】参考IEC 62321-6 (2015),以氣相層析 □	5	n. d.
十溴聯苯 / Decabromobiphenyl	mg/kg	/質譜儀檢測. / With reference to	5	n. d.
多溴聯苯醚總和 / Sum of PBDEs	mg/kg	IEC 62321-6 (2015) and performed	***	n, d.
一溴聯苯醚 / Monobromodiphenyl ether	mg/kg	by GC/MS.	5	n. d.
二溴聯苯醚 / Dibromodiphenyl ether	mg/kg		5	n. d.
三溴聯苯醚 / Tribromodiphenyl ether	ng/kg		5	n. d.
四溴聯苯醚 / Tetrabromodiphenyl ether	mg/kg		5	n, d.
五溴聯苯醚 / Pentabromodiphenyl ether	mg/kg		5	n. d.
六溴聯苯醚 / Hexabromodiphenyl ether	mg/kg		5	n. d.
七溴聯苯醚 / Heptabromodiphenyl ether	mg/kg]	5	n. d.
八溴聯苯醚 / Octabromodiphenyl ether	mg/kg	Ι	5	n. d.
九溴聯苯醚 / Nonabromodiphenyl ether	mg/kg] Γ	5	n, d,
十溴聯苯醚 / Decabromodiphenyl ether	mg/kg		5	n. đ.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.aus.com/en/Tema-and-Conditions.gagge and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at httention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and writhin the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 6 of 16

Test Report

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件(泗洪)有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P,R, CHINA)

测試項目 (Test Items)	單位 (Unit)	測試方法 (Method)	方法偵測 極限値 (MDL)	結果 (Result) No.1
鹵素 / Halogen			· · · · · · · · · · · · · · · · · · ·	NO. 1
鹵素(氟)/ Halogen-Fluorine (F) (CAS No.: 14762-94-8)	mg/kg		50	n. d.
鹵素(氯)/ Halogen-Chlorine (C1) (CAS No.: 22537-15-1)	mg/kg	参考BS EN 14582 (2016),以離子層析 儀分析. / With reference to BS EN	50	n. d.
鹵素(溴)/ Halogen-Bromine (Br) (CAS No.: 10097-32-2)	mg/kg	14582 (2016). Analysis was performed by IC.	50	n. d.
鹵素(碘)/ Halogen-Iodine(I)(CAS No.: 14362-44-8)	mg/kg		50	n, d.

備註(Note):

- 1. mg/kg = ppm ; 0.1wt% = 1000ppm
- 2. n.d. = Not Detected (未檢出)
- 3. MDL = Method Detection Limit (方法偵測極限值)
- 4. "-" = Not Regulated (無規格值)
- 5. **= Qualitative analysis (No Unit) 定性分析(無單位)
- 6. Negative = Undetectable 陰性(未偵測到); Positive = Detectable 陽性(已偵測到)

7. (�):

若鉻含量小於六價鉻之方法偵測極限值,則六價鉻為n,d,,不須再測試六價鉻。

The result of Cr(VI) is "n.d." as the result of Chromium (Cr) is less than the MDL of Cr(VI), and confirmation test of Cr(VI) is not required.

若鉻含量未小於六價鉻之方法偵測極限值,需進行六價鉻測試。

If the Chromium (Cr) content is not less than the MDL of Cr(VI), confirmation test of Cr(VI) is required.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://document.spx.com/anflorms.and-Conditions.for-Incompany-And-Conditions.for-Incompany-and-Conditions.for-Incompany-and-Conditions.for-Incompany-and-Conditions.for-Incompany-and-Conditions.for-Incompany-and-Conditions.for-Incompany-and-Conditions.for-Incompany-and-Conditions.for-Incompany-and-Conditions.for-Incompany-and-Conditions.for-Incompany-and-Conditions.for-Incompany-And-Conditions.for-Incompany-and-Conditions.for-Incompany-Administrations.for-Incompany-and-Conditions.for-Incompany-Administrations.



Test Report

號碼(No.): CE/2017/C0633 日期(Date): 2017/12/12

頁數(Page): 7 of 16

I DE LE TOUR BLUE DE LE TOUR FORMEN DE LE COMPTE DE LE TOUR FORME DE LE TO

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件(泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

8. 樣品的測試是基於申請人要求混合測試,報告中的混合測試結果不代表其中個別單一材質的含量. (The samples was/were analyzed on behalf of the applicant as mixing sample in one testing. The above results was/were only given as the informality value.)

PFOS參考資訊(Reference Information): 持久性有機污染物 POPs - (EU) 757/2010

PFOS濃度在物質或製備中不得超過0.001%(10ppm),在半成品、成品或零部件中不得超過0.1%(1000ppm),在紡織品或塗 層材料中不得超過1ug/m2。

(Outlawing PFOS as substances or preparations in concentrations above 0.001% (10ppm), in semi-finished products or articles or parts at a level above 0.1%(1000ppm), in textiles or other coated materials above lug/m^2 .)

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions-fems-a-Documents-sess. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company, any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 8 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件(泗洪)有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市筵朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)


(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P. R, CHINA)

<u>重金屬流程圖 / Analytical flow chart of Heavy Metal</u>

根據以下的流程圖之條件,樣品已完全溶解。(六價鉻測試方法除外)

These samples were dissolved totally by pre-conditioning method according to below flow chart. (Cr6+ test method excluded)

- 測試人員:王志瑋 / Technician : JR Wang
- 测試負責人:張啟興 / Supervisor: Troy Chang

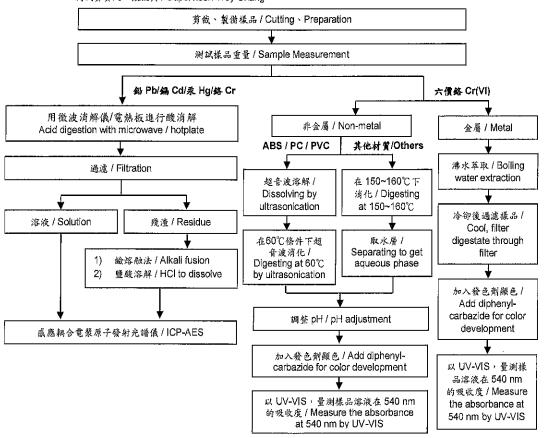

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sqs.com/en/Terms-act-Conditions.asce. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 9 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)


(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P,R, CHINA)

根據以下的流程圖之條件,樣品已完全溶解。 / These samples were dissolved totally by pre-conditioning method according to below flow chart.

- 測試人員:王志瑋 / Technician: JR Wang
- 測試負責人:張啟興 / Supervisor: Troy Chang

元素以 ICP-AES 分析的消化流程圖 (Flow Chart of digestion for the elements analysis performed by ICP-AES)

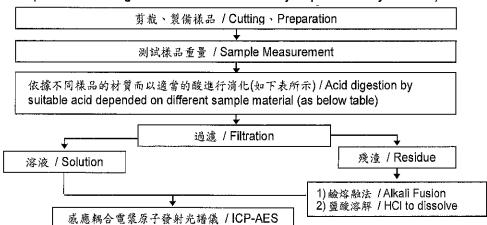

	_
鋼,銅,鋁,焊錫 / Steel, copper, aluminum, solder	王水,硝酸,鹽酸,氫氟酸,雙氧水 /
	Aqua regia, HNO₃, HCl, HF, H₂O₂
玻璃 / Glass	硝酸,氫氟酸 / HNO3/HF
金,鉑,鈀,陶瓷 / Gold, platinum, palladium, ceramic	王水 / Aqua regia
銀 / Silver	硝酸 / HNO3
塑膠 / Plastic	硫酸,雙氧水,硝酸,鹽酸 / H2SO4, H2O2, HNO3, HCI
其他 / Others	加入適當的試劑至完全溶解 / Added appropriate
	reagent to total digestion

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.ags.com/en/Terms-and-Conditions-for-lectronic Documents at <a href="http://www.ags.com/en/Terms-and-Conditions-for-lectronic Documents at <a href="http://www.ags.com/en/Terms-and-Conditions-for-lectronic Documents at <a href="http://www.ags.com/en/Terms-and-Conditions-for-lectronic-bocuments-for-lectr



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 10 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件(泗洪)有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)


(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU,

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P. R. CHINA)

全氟辛酸/全氟辛烷磺酸分析流程圖 / Analytical flow chart - PFOA/PFOS

■ 測試人員:涂雅苓 / Technician: Yaling Tu

測試負責人:張啟興 / Supervisor: Troy Chang

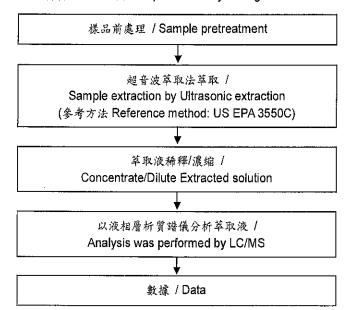

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sus.com/en/Terms-and-Conditions-for-send-Condi



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 11 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)


(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

聚氯乙烯物質判定分析流程圖 / Analysis flow chart - PVC

測試人員:涂雅苓 / Technician: Yaling Tu

測試負責人:張啟興 / Supervisor: Troy Chang

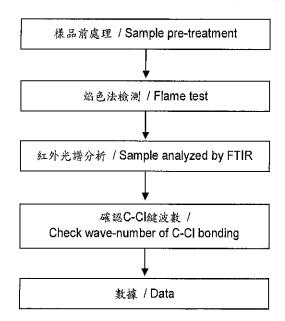

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions-Conditions-and-Conditions-and-Conditions-Conditions-and-Conditions-Conditions-and-Conditions-Conditions-and-Conditions-Conditions-and-Conditions-Conditions-and-Conditions-Conditions-and-Conditions-



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 12 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU,


(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P. R., CHINA)

<u>可塑劑分析流程圖 / Analytical flow chart - Phthalate</u>

測試人員:徐毓明 / Technician: Andy Hsu

測試負責人:張啟興 / Supervisor: Troy Chang

【测試方法/Test method: IEC 62321-8】

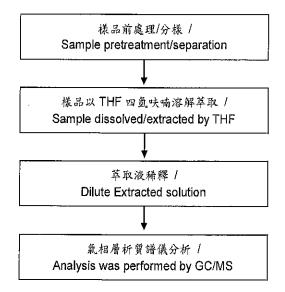

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.cor/en/Terms-and-Conditions.cor/en/Terms-and-C



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 13 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO, LTD.)

(慶邦電子元器件(泗洪)有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)


桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

六溴環十二烷分析流程圖 / Analytical flow chart - HBCDD

- 測試人員:涂雅苓 / Technician: Yaling Tu
- 測試負責人:張啟興 / Supervisor: Trov Chang

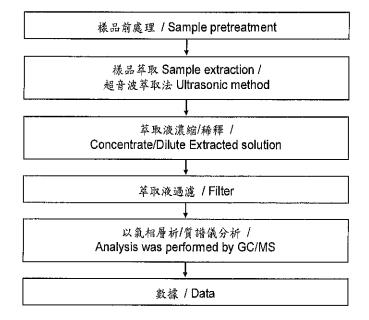

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://prov.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company, any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 14 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件(泗洪)有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD,KUNJIA HI-TECH INDUSTRIAL PARK,KUN-SHAN,JIANG-SU, CHINA)


(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

<u>多溴聯苯/多溴聯苯醚分析流程圖 / Analytical flow chart - PBB/PBDE</u>

測試人員:涂雅苓 / Technician: Yaling Tu

測試負責人:張啟興 / Supervisor: Troy Chang

初次测試程序 / First testing process _ 確認程序 / Confirmation process - - - →

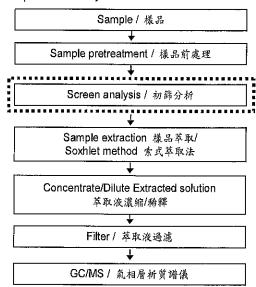

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://rewww.2gs.com/en/Tamis-ant-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://rewww.ggs.com/en/Tamis-ant-Conditions/ entertained hereon reflects the Company's findings at the time of its intervention only and writin the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents, This document cannot be reproduced, except in full, without prior written approval of the Company, any unauthorized atteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 15 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件(泗洪)有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)


(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P. R, CHINA)

鹵素分析流程圖 / Analytical flow chart - Halogen

測試人員: 陳恩臻 / Technician: Rita Chen

測試負責人:張啟興 / Supervisor: Troy Chang

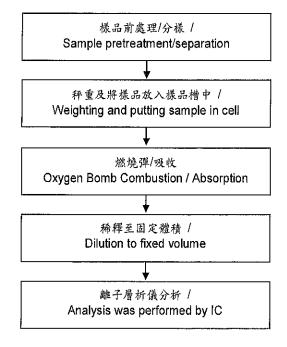

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Temps-and-Conditions-Service and Conditions for Electronic Documents at <a href="http://www.ags.com/en/Temps-and-Conditions-Document-service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions-Service-and-Conditions



Test Report

號碼(No.): CE/2017/C0633

日期(Date): 2017/12/12

頁數(Page): 16 of 16

西北臺慶科技股份有限公司 / TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號(NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)


(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 / GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU,

(中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P. R., CHINA)


* 照片中如有箭頭標示,則表示為實際檢測之樣品/部位. *

(The tested sample / part is marked by an arrow if it's shown on the photo.)

CE/2017/C0633

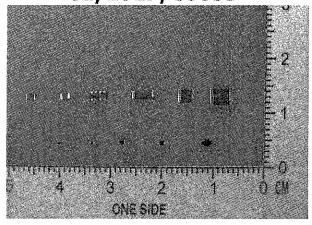

CE/2017/C0633

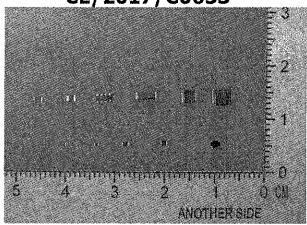

** 報告結尾 (End of Report) **

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.ags.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.ags.com/en/Terms-and-Conditions/Enross-Locument.ass.com/en

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for taitec manufacturer:

Other Similar products are found below:

TMPC1205HP-4R7MG-D TMPC0624H-4R7MG-D TMPC0402HP-R10YG-Z02 TMPC0502HP-R68MG-D TMPC0518HP-R47MG-D TMPC1707HP-3R3MG-D HPC6045NF-1R0M TMPA0603S-1R5MN-D TMPC1004H-470MG-D TMPC0603H-1R0MG-D HPC5020CF-2R2Y TMPA0603S-330MN-D HPC6045NF-100MTH TMPC0618H-1R0MG-D WCM4532F2SF-601T15 TMPA0605S-4R7MN-D TMPC1207F-470M WCM3216F2SV-102T02 TMPF0603A-3R3MN-D TMPC1265HP-100MG-D TMPC0502HP-6R8MG-D TMPC1265HP-2R2MG-D UHP252012NF-R47M HCB3216KF-501T30 AHP201610TF-R68M-1 HPC5020NF-1R0Y TMPC0412HP-R12MG-Z03 TMPC1206HP-101MG-D HPC5040NF-3R3M HPC8040NF-8R2M TMPC1205HP-330MG-D TMPA1206SP-100MN-D UHP252012NF-1R0MT01 HPC5040NF-2R2M HSF2012F2SF-670T04 TMPC1235HP-2R2MG-D TMPC1004H-1R0MG-D TMPA1004S-1R0MN-D TMPC0615H-220MG-D DFP201610TF-R47M AHP201610AF-2R2M TMPC0512HP-4R7MG-D TMPC0602H-220MG-D WCM3216F2SF-102T02 TMPC0624H-R22MG-D TMPC1265HP-R82MG-D TMPC0603H-6R8MG-D FCM2012CF-600T07 FCM2012CF-221T04 FCI2012F-R12K