



# Specification for Approval

Date: 2017/12/11

HCB2012KF-220T60







Customer: 深圳台慶

TAI-TECH P/N:

	CUSTOMER P/N:					
	DESCRIPTION:					
	QUANTITY:	pcs	<u>.                                    </u>			
REMARK:						
	Cı	ustomer Approval Feedba	ack			

#### 西北臺慶科技股份有限公司 TAI-TECH Advanced Electronics Co., Ltd

#### □西北臺慶科技股份有限公司

TAI-TECH Advanced Electronics Co., Ltd Headquarter:

NO.1 YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN HSIEN, TAIWAN, R.O.C.

TEL: +886-3-4641148 FAX: +886-3-4643565

http://www.tai-tech.com.tw E-mail: sales@tai-tech.com.tw

□Office:

11BC, Building B Fortune Plaza, NO. 7002, Shennan Avenue, Futian **District Shenzhen** 

TEL: +86-755-23972371 FAX: +86-755-23972340

#### ■臺慶精密電子(昆山)有限公司

TAI-TECH ADVANCED ELECTRONICS(KUNSHAN) CO., LTD SHINWHA ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA TEL: +86-512-57619396 FAX: +86-512-57619688

E-mail: sales@tai-tech.cn

#### □慶邦電子元器件(泗洪)有限公司

TAIPAQ ELECTRONICS (SIHONG) CO., LTD JIN SHA JIANG ROAD , CONOMIC DEVELOPMENT ZONE SIHONG , JIANGSU , CHINA.
TEL: +86-527-88601191 FAX: +86-527-88601190

E-mail: sales@taipaq.cn

#### Sales Dep.

CHECKED
劉瑷瑄
Aries Liu

#### **R&D** Center

APPROVED	CHECKED	DRAWN
鄧福興	浦冬生	王俞琴

## High Current Ferrite Chip Bead(Lead Free)

HCB2012KF-220T60

		ECN HISTO	RY LIST	Γ	
REV	DATE	DESCRIPTION	APPROVED	CHECKED	DRAWN
1.0	13/06/06	變更可靠度條件	楊祥忠	羅培君	張嘉玲
2.0	14/01/24	變更電鍍錫層厚度 3.0um min.=>3.5um min.	楊祥忠	羅培君	張嘉玲
3.0	14/08/01	變更 Reflow 圖示	楊祥忠	羅培君	張嘉玲
3.1	14/08/01	修正包裝帶尺寸	楊祥忠	羅培君	張嘉玲
4.0	16/01/26	增訂可靠度 Thermal shock: (Bead) Step3:125±2℃ 30±5min	楊祥忠	詹偉特	張嘉玲
5.0	17/02/16	修訂 Recommended PC Board Pattern	楊祥忠	詹偉特	張嘉玲
備					
註					

**TAI-TECH KBM01-171200259** P2.

## High Current Ferrite Chip Bead(Lead Free)

HCB2012KF-220T60


Certificate

Green Partner

### 1.Features

- 1. Monolithic inorganic material construction.
- 2. Closed magnetic circuit avoids crosstalk.
- 3. Suitable for reflow soldering.
- 4. Shapes and dimensions follow E.I.A. spec.
- 5. Available in various sizes.
- 6. Excellent solder ability and heat resistance.
- 7. High reliability.
- 8. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
- 9. Low DC resistance structure of electrode to prevent wasteful electric power consumption.

### 2.Dimensions




A 2.00±0.20 B 1.25±0.20 C 0.85±0.20	Chip Size				
	Α	2.00±0.20			
C 0.85±0.20	В	1.25±0.20			
	С	0.85±0.20			
<b>D</b> 0.50±0.30	D	0.50±0.30			

Units: mm

### 3.Part Numbering



E: Packaging T=Taping and Reel, B=Bulk(Bags) F: Rated Current 60=6000mA

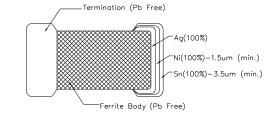


## 4.Specification

Tai-Tech Part Number	Impedance (Ω)	Test Frequency (Hz)	DC Resistance $(\Omega)$ max.	Rated Current (mA) max.
HCB2012KF-220T60	22±25%	60mV/100M	0.01	6000

- Rated current: based on temperature rise test
- In compliance with EIA 595

#### ■ Impedance-Frequency Characteristics

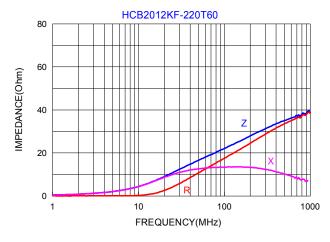

www.tai-tech.com.tw

TAI-TECH KBM01-171200259 P3.

## 5. Reliability and Test Condition


Item	Performance	Test Condition		
Series No.	FCB FCM HCB GHB FCA			
Operating Temperature	$-40$ ∼+125 $^{\circ}$ C (Including self-temperature rise)			
Transportation Storage Temperature	-40~+125℃ (on board)	For long storage conditions, please see the Application Notice		
Impedance (Z)	Refer to standard electrical characteristics list	Agilent4291 Agilent E4991 Agilent4287 Agilent16192		
DC Resistance	Training to distribute distributed includes include includes included includes include includ	Agilent 4338		
Rated Current		DC Power Supply Over Rated Current requirements, there will be some risk		
Temperature Rise Test	Rated Current < 1A ∆T 20℃Max Rated Current ≧ 1A ∆T 40℃Max	Applied the allowed DC current.     Temperature measured by digital surface thermometer.		
Life test  Load Humidity	Appearance: no damage.  Impedance: within±15%of initial value. Inductance: within±10%of initial value. Q: Shall not exceed the specification value. RDC: within ±15% of initial value and shall not exceed the specification value	Preconditioning: Run through IR reflow for 2 times.( IPC/JEDEC J-STD-020D Classification Reflow Profiles) Temperature: 125±2°C Applied current: rated current. Duration: 1000±12hrs. Measured at room temperature after placing for 24±2 hrs. Preconditioning: Run through IR reflow for 2 times.( IPC/JEDEC J-STD-020D Classification Reflow Profiles) Humidity: 85±2°R.H. Temperature: 85±2°C. Duration: 1000hrs Min. with 100% rated current.		
Thermal shock	Appearance: no damage.  Impedance: within±15%of initial value. Inductance: within±10%of initial value. Q: Shall not exceed the specification value. RDC: within ±15% of initial value and shall not exceed the specification value	Measured at room temperature after placing for 24±2 hrs.   Preconditioning: Run through IR reflow for 2 times. ( IPC/JEDEC J-STD-020D Classification Reflow Profiles)   Condition for 1 cycle Step1: $-40\pm2^{\circ}$ $30\pm5$ min.   Step2: $25\pm2^{\circ}$ $30\pm5$ min.   Step3: $+125\pm2^{\circ}$ $30\pm5$ min.   Number of cycles: $500$ Measured at room temperature after placing for $24\pm2$ hrs.		
Vibration	Appearance: No damage. Impedance: within±15% of initial value Inductance: within±10% of initial value Q: Shall not exceed the specification value. RDC: within ±15% of initial value and shall not exceed the specification value	Preconditioning: Run through IR reflow for 2 times. (IPC/JEDEC J-STD-020D Classification Reflow Profiles) Oscillation Frequency: 10~2K~10Hz for 20 minutes Equipment: Vibration checker Total Amplitude:1.52mm±10% Testing Time: 12 hours(20 minutes, 12 cycles each of 3 orientations) ∘		
Bending	Appearance: No damage. Impedance: within±10% of initial value Inductance: within±10% of initial value Q: Shall not exceed the specification value. RDC: within ±15% of initial value and shall not exceed the specification value	Shall be mounted on a FR4 substrate of the following dimensions: >=0805inch(2012mm):40x100x1.2mm <0805inch(2012mm):40x100x0.8mm Bending depth: >=0805inch(2012mm):1.2mm <0805inch(2012mm):0.8mm Duration of 10 sec for a min.		
		Test condition:		
Shock	Appearance: No damage. Impedance: within±10% of initial value Inductance: within±10% of initial value  O: Shall not exceed the specification value	Type Value duration (g's) (D) (ms) Wave form Change (Vi)ft/sec		
	Q : Shall not exceed the specification value. RDC : within ±15% of initial value and shall not exceed the specification value	SMD         50         11         Half-sine         11.3           Lead         50         11         Half-sine         11.3		
Solderability	More than 95% of the terminal electrode should be covered with solder.	Preheat: 150°C,60sec. Solder: Sn96.5%-Ag3%-Cu0.5% Solder temperature: 245±5°C Flux for lead free: Rosin. 9.5% Depth: completely cover the termination. Dip time: 4±1sec.		

**TAI-TECH** KBM01-171200259 P4.

Item	Performance	Test Condition			
			Number of heat	cycles: 1	
Resistance to Soldering	Appearance : No damage. Impedance : within±15% of initial value		Temperature (°C)	Time (s)	Temperature ramp/immersion and emersion rate
Heat	Inductance: within±10% of initial value Q: Shall not exceed the specification value. RDC: within ±15% of initial value and shall not exceed	260 ±5 (solder temp)	10 ±1	25mm/s ±6 mm/s	
			Depth: complete	ly cover th	ne termination
Terminal strength	Appearance: No damage.  Impedance: within±15% of initial value Inductance: within±10% of initial value Q: Shall not exceed the specification value. RDC: within±15% of initial value and shall not exceed the specification value		Preconditioning: Run through IR reflow fo times.( IPC/JEDEC J-STD-020D Classificat Reflow Profiles) Component mounted on a PCB apply a fo >0805inch(2012mm):1kg <=0805inch(2012mm):0.5kg to the side of a device being tested. This fo shall be applied for 60 +1 seconds. Also force shall be applied gradually as not to shot the component being tested.		

#### \*\*Derating Curve


For the ferrite chip bead which withstanding current over 1.5A, as the operating temperature over  $85^{\circ}\mathrm{C}$ , the derating current information is necessary to consider with. For the detail derating of current, please refer to the Derated Current vs. Operating Temperature curve.




## 6. Soldering and Mounting

#### 6-1. Recommended PC Board Pattern

Chip Size						Pattern ow Sold				
Series	Type	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)		
	0603	0.6±0.03	0.30±0.03	0.30±0.03	0.15±0.05	0.35	0.30	0.40		
FCB	1005	1.0±0.10	0.50±0.10	0.50±0.10	0.25±0.10	0.50	0.40	0.60		
FCM	1608	1.6±0.15	0.80±0.15	0.80±0.15	0.30±0.20	0.80	0.85	0.95		
HCB	0040	2.0±0.20	1.25±0.20	0.85±0.20	0.50±0.30	1.05	4.00	4.45		
GHB	<mark>2012</mark>	2.0±0.20	1.25±0.20	1.25±0.20	0.50±0.30	1.05		1.05	<mark>1.00</mark>	1.45
FCI	3216	3.2±0.20	1.60±0.20	1.10±0.20	0.50±0.30	1.05	2.20	1.80		
FHI	3225	3.2±0.20	2.50±0.20	1.30±0.20	0.50±0.30	1.05	2.20	2.70		
FCH	4516	4.5±0.20	1.60±0.20	1.60±0.20	0.50±0.30	1.05	3.30	1.80		
HCI	4532	4.5±0.20	3.20±0.20	1.50±0.20	0.50±0.30	1.05	3.30	3.40		



Land
Solder Resist



PC board should be designed so that products can prevent damage from mechanical stress when warping the board.

### 6-2. Soldering

Mildly activated rosin fluxes are preferred. The terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools. Note.

If wave soldering is used ,there will be some risk.

Re-flow soldering temperatures below 240 degrees, there will be non-wetting risk

#### 6-2.1 Lead Free Solder re-flow:

Recommended temperature profiles for lead free re-flow soldering in Figure 1. (Refered to J-STD-020C)

#### 6-2.2 Soldering Iron:

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. If a soldering iron must be employed the following precautions are recommended. for Iron Soldering in Figure 2.


• Preheat circuit and products to 150℃

• 350 $^{\circ}$ C tip temperature (max)


Never contact the ceramic with the iron tip

• 1.0mm tip diameter (max)

- $\bullet$  Use a 20 watt soldering iron with tip diameter of 1.0mm
- Limit soldering time to 4~5sec.



Reflow times: 3 times max Fig.1



Iron Soldering times: 1 times max

#### 6-2.3 Solder Volume:


Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceed as shown in right side:

Minimum fillet height = soldering thickness + 25% product height



### 7. Packaging Information


#### 7-1. Reel Dimension

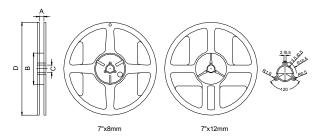

Туре	A(mm)	B(mm)	C(mm)	D(mm)
<mark>7"x8mm</mark>	9.0±0.5	60±2	13.5±0.5	<mark>178±2</mark>
7"x12mm	13.5±0.5	60±2	13.5±0.5	178±2

#### 7-2.1 Tape Dimension / 8mm

#### ■Material of taping is paper

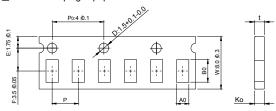


	P22.0.1 P04.0.1 01.0001.000	
Ø.1 E:1.75.90.1		
F:3.5.0.1	P	Ко

Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)
060303	0.70±0.06	0.40±0.06	0.45max	2.0±0.05	0.45max
100505	1.12±0.03	0.62±0.03	0.60±0.03	2.0±0.05	0.60±0.03

Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)
160808	1.80±0.05	0.96+0.05/-0.03	0.95±0.05	4.0±0.10	0.95±0.05
<mark>201209</mark>	2.10±0.05	1.30±0.05	<mark>0.95±0.05</mark>	4.0±0.10	<mark>0.95±0.05</mark>


**TAI-TECH KBM01-171200259** P6.

■Material of taping is plastic

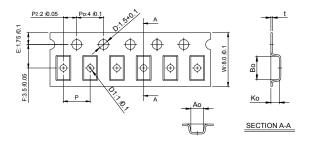

Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)	D1(mm)
201212	2.10±0.10	1.28±0.10	1.28±0.10	4.0±0.10	0.22±0.05	1.0±0.10
321611	3.35±0.10	1.75±0.10	1.25±0.10	4.0±0.10	0.23±0.05	1.0±0.10
322513	3.42±0.10	2.77±0.10	1.55±0.10	4.0±0.10	0.22±0.05	1.0±0.10
321609	3.40±0.10	1.77±0.10	1.04±0.10	4.0±0.10	0.22±0.05	1.0±0.10

#### 7-2.2 Tape Dimension / 12mm

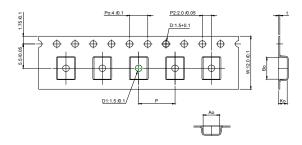


	Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)	D1(mm)
	451616	4.70±0.10	1.75±0.10	1.75±0.10	4.0±0.10	0.24±0.05	1.5±0.10
•	453215	4.70±0.10	3.45±0.10	1.60±0.10	8.0±0.10	0.24±0.05	1.5±0.10

#### 7-3. Packaging Quantity

Chip Size	453215	451616	322513	321611	321609	201212	<mark>201209</mark>	160808	100505	060303
Chip / Reel	1000	2000	2500	3000	3000	2000	<mark>4000</mark>	4000	10000	15000
Inner box	4000	8000	12500	15000	15000	10000	<mark>20000</mark>	20000	50000	75000
Middle box	20000	40000	62500	75000	75000	50000	100000	100000	250000	375000
Carton	40000	80000	125000	150000	150000	100000	<mark>200000</mark>	200000	500000	750000

#### 7-4. Tearing Off Force



The force for tearing off cover tape is 15 to 60 grams in the arrow direction under the following conditions.

Room Temp.	Room Humidity	Room atm	Tearing Speed	
(℃)	(%)	(hPa)	mm/min	
5~35	45~85	860~1060	300	

### **Application Notice**

Storage Conditions(component level)

To maintain the solder ability of terminal electrodes:

- 1. TAI-TECH products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
- 2. Temperature and humidity conditions: Less than 40°C and 60% RH.
- 3. Recommended products should be used within 12 months from the time of delivery.
- 4. The packaging material should be kept where no chlorine or sulfur exists in the air.
- Transportation
- 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- 2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
- 3. Bulk handling should ensure that abrasion and mechanical shock are minimized.



## **Test Report**

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 1 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

### 以下測試樣品係由申請廠商所提供及確認 (The following sample(s) was/were submitted and identified by/on behalf of the applicant as):

樣品名稱(Sample Description)

FERRITE CHIP BEAD INDUCTOR ARRAY MCF MCM YMV SERIES

樣品型號(Style/Item No.)

FERRITE CHIP BEAD INDUCTOR ARRAY MCF MCM YMV SERIES

收件日期(Sample Receiving Date)

2016/12/06

測試期間(Testing Period)

2016/12/06 TO 2016/12/12

測試結果(Test Results) : 請見下一頁 (Please refer to next pages).





Test Report

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 2 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

### 測試結果(Test Results)

測試部位(PART NAME)No.1

整體混測 (MIXED ALL PARTS)

測試項目 (Test Items)	單位 (Unit)	測試方法 (Method)	方法偵測 極限値	結果 (Result)
(lest items)	(OIII L)	(method)	(MDL)	No. 1
鍋 / Cadmium (Cd)	mg/kg	参考IEC 62321-5 (2013),以感應耦合 電漿原子發射光譜儀檢測. / With	2	n. d.
鉛 / Lead (Pb)	mg/kg	reference to IEC 62321-5 (2013) and performed by ICP-AES.	2	n, d.
永 / Mercury (Hg)	mg/kg	参考IEC 62321-4 (2013),以感應耦合 電漿原子發射光譜儀檢測. / With reference to IEC 62321-4 (2013) and performed by ICP-AES.	2	n. d.
六價鉻 / Hexavalent Chromium Cr(VI)	mg/kg	参考IEC 62321 (2008),以UV-VIS檢 測. / With reference to IEC 62321 (2008) and performed by UV-VIS.	2	n. d.
绨 / Antimony (Sb)	mg/kg	参考US EPA 3052 (1996),以感應耦合電漿原子發射光譜儀檢測. / With reference to US EPA 3052 (1996). Analysis was performed by ICP-AES.	2	n. d.
砷 / Arsenic (As)	mg/kg	参考US EPA 3052 (1996),以感應耦合電漿原子發射光譜儀檢測. / With reference to US EPA 3052 (1996). Analysis was performed by ICP-AES.	2	n. d.
鈹 / Beryllium (Be)	mg/kg	参考US EPA 3052 (1996),以感應耦合電漿原子發射光譜儀檢測. / With reference to US EPA 3052 (1996). Analysis was performed by ICP-AES.	2	n. d.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/ar/Terms-and-Conditions asp, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms.and-Conditions/Termse-Document.aspy. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in fully, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law Unless otherwise stated the results shown in this test report refer only to the samplest tested.



## **Test Report**

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 3 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件(泗洪)有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE , SIHONG COUNTY , SUQIANCITY , JIANGSU PROVINCE , P, R , CHINA)

測試項目 (Test Items)	單位 (Unit)	测試方法 (Method)	方法偵測 極限値 (MDL)	結果 (Result) No.1
多溴聯苯總和 / Sum of PBBs	mg/kg		. – .	n. d.
一溴聯苯 / Monobromobiphenyl	mg/kg	1	5	n. d.
二溴聯苯 / Dibromobiphenyl	mg/kg	7	5	n. d.
三溴聯苯 / Tribromobiphenyl	mg/kg	1	5	n. d.
四溴聯苯 / Tetrabromobiphenyl	mg/kg	1	5	n. d.
五溴聯苯 / Pentabromobiphenyl	mg/kg	·	5	n. d.
六溴聯苯 / Hexabromobiphenyl	mg/kg	] · [	5	n. d.
七溴聯苯 / Heptabromobiphenyl	mg/kg	]	5	n. d.
八溴聯苯 / Octabromobiphenyl	mg/kg	]	5	n. d.
九溴聯苯 / Nonabromobiphenyl	mg/kg		5	n. d.
十溴聯苯 / Decabromobiphenyl	mg/kg	/質譜儀檢測. / With reference to	5	n. d.
多溴聯苯醚總和 / Sum of PBDEs	ng/kg	IEC 62321-6 (2015) and performed	_	n. d.
一溴聯苯醚 / Monobromodiphenyl ether	mg/kg	by GC/MS.	5	n. d.
二溴聯苯醚 / Dibromodiphenyl ether	mg/kg		5	n. d.
三溴聯苯醚 / Tribromodiphenyl ether	mg/kg		5	n. d.
四溴聯苯醚 / Tetrabromodiphenyl ether	mg/kg	· .	5	n, d,
五溴聯苯醚 / Pentabromodiphenyl ether	mg/kg		5	n. d.
六溴聯苯醚 / Hexabromodiphenyl ether	mg/kg		5	n. d.
七溴聯苯醚 / Heptabromodiphenyl ether	mg/kg	.[	5	n. d.
八溴聯苯醚 / Octabromodiphenyl ether	mg/kg		5	n. d.
九溴聯苯醚 / Nonabromodiphenyl ether	mg/kg		. 5	n.d.
十溴聯苯醚 / Decabromodiphenyl ether	mg/kg		5	n. d.
鄰苯二甲酸丁苯甲酯 / BBP (Butyl	mg/kg	參考IEC 62321-8/CD (2013),以氣相	50	n. d.
Benzyl phthalate) (CAS No.: 85-68-7)		多考1EC 02321-0/CD (2013), 以飛相   層析儀/質譜儀絵測. / With   reference to IEC 62321-8/CD		
鄰苯二甲酸二丁酯 / DBP (Dibutyl phthalate) (CAS No.: 84-74-2)	mg/kg	(2013). Analysis was performed by GC/MS.	50	n. d.
			·	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.scs.com/en/Terms-and-Conditions-service-printed-commons-service-printed-conditions-service-printed-commons-service-printed-conditio



**Test Report** 

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 4 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

測試項目 (Test Items)	單位 (Unit)	测試方法 (Method)	方法偵測 極限値 (MDL)	結果 (Result) No.1
鄰苯二甲酸二 (2-乙基己基)酯 / DEHP (Di- (2-ethylhexyl) phthalate) (CAS No.: 117-81-7)	mg/kg		50	n. d.
鄰苯二甲酸二異丁酯 / DIBP (Di- isobutyl phthalate) (CAS No.: 84-69- 5)	mg/kg		50	n. d.
鄉苯二甲酸二異癸酯 / DIDP (Di- isodecyl phthalate) (CAS No.: 26761- 40-0; 68515-49-1)	mg/kg	参考IEC 62321-8/CD (2013),以氣相 層析儀/質譜儀檢測. / With	50	n. d.
鄰苯二甲酸二異壬酯 / DINP (Di- isononyl phthalate) (CAS No.: 28553- 12-0; 68515-48-0)	mg/kg	reference to IEC 62321-8/CD (2013). Analysis was performed by GC/MS.	50	n. d.
鄰苯二甲酸二正辛酯 / DNOP (Di-n-octyl phthalate) (CAS No.: 117-84-0)	mg/kg		50	n.d.
鄰苯二甲酸二正己酯 / DNHP (Di-n-hexyl phthalate) (CAS No.: 84-75-3)	mg/kg		50	n. d.
鄰苯二甲酸二戊酯 / DNPP (Di-n-pentyl phthalate) (CAS No.: 131-18-0)	mg/kg		50	n. d.
六溴環十二烷及所有主要被辨別出的異構物 / Hexabromocyclododecane (HBCDD) and all major diastereoisomers identified ( $\alpha$ - HBCDD, $\beta$ - HBCDD, $\gamma$ - HBCDD) (CAS No.: 25637-99-4 and 3194-55-6 (134237-51-7, 134237-50-6, 134237-52-8))	mg/kg	参考IEC 62321 (2008),以氣相層析/ 質譜儀檢測. / With reference to IEC 62321 (2008). Analysis was performed by GC/MS.	5	n. d.

This document is issued by the Company subject to its General Conditions of service printed overlear, available on request of accessible at http://www.ags.com/en/idms-en/c.conditions-es/c.co



**Test Report** 

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 5 of 15

ugo), 0 01 10

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

測試項目 (Test Items)	單位 (Unit)	測試方法 (Method)	方法偵測 極限値 (MDL)	結果 (Result) No.1
鹵素 / Halogen			-	
鹵素(氟)/ Halogen-Fluorine (F) (CAS No.: 14762-94-8)	mg/kg		50	n. d.
鹵素(氯)/ Halogen-Chlorine (C1) (CAS No.: 22537-15-1)	mg/kg	参考BS EN 14582 (2007),以離子層析 儀分析. / With reference to BS EN	50	n. d.
鹵素(溴)/ Halogen-Bromine (Br) (CAS No.: 10097-32-2)	mg/kg	14582 (2007). Analysis was performed by IC.	50	n. d.
鹵素(碘)/ Halogen-Iodine (I) (CAS No.: 14362-44-8)	mg/kg		50	n. d.
全氟辛烷磺酸 / Perfluorooctane sulfonates (PFOS-Acid, Metal Salt, Amide)	mg/kg	参考US EPA 3550C (2007),以液相層析/質譜儀檢測. / With reference to US EPA 3550C (2007). Analysis was performed by LC/MS.	10	n. d.
全氟辛酸 / PFOA (CAS No.: 335-67-1)	mg/kg	参考US EPA 3550C (2007),以液相層析/質譜儀檢測. / With reference to US EPA 3550C (2007). Analysis was performed by LC/MS.	10	n, d.
聚氯乙烯 / PVC	**	以紅外光譜分析及焰色法檢測. / Analysis was performed by FTIR and FLAME Test.	- ·	Negative

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-assys.">http://www.sgs.com/en/Terms-and-Conditions-assys.</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-Document-assys.">http://www.sgs.com/en/Terms-and-Conditions-Document-assys.</a> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information conteined hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



**Test Report** 

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 6 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市窪朗昆嘉高科技工業區郭澤路(GUO-ZE ROAD,KUNJIA HI-TECH INDUSTRIAL PARK,KUN-SHAN,JIANG-SU,CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE , SIHONG COUNTY , SUQIANCITY , JIANGSU PROVINCE , P, R , CHINA)

#### 備註(Note):

- 1. mg/kg = ppm : 0.1wt% = 1000ppm
- 2. n.d. = Not Detected (未檢出)
- 3. MDL = Method Detection Limit (方法偵測極限值)
- 4. "-" = Not Regulated (無規格值)
- 5. \*\*= Qualitative analysis (No Unit) 定性分析(無單位)
- 6. Negative = Undetectable 陰性(未偵測到); Positive = Detectable 陽性(已偵測到)
- 7. 樣品的測試是基於申請人要求混合測試,報告中的混合測試結果不代表其中個別單一材質的含量. (The samples was/were analyzed on behalf of the applicant as mixing sample in one testing. The above results was/were only given as the informality value.)

### PFOS参考資訊(Reference Information): 持久性有機污染物 POPs - (EU) 757/2010

PFOS濃度在物質或製備中不得超過0.001%(10ppm),在半成品、成品或零部件中不得超過0.1%(1000ppm),在紡織品或塗 層材料中不得超過1µg/m²。

(Outlawing PFOS as substances or preparations in concentrations above 0.001% (10ppm), in semi-finished products or articles or parts at a level above 0.1%(1000ppm), in textiles or other coated materials above  $1\mu g/m^2$ .)

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions">http://www.sgs.com/en/Terms-and-Conditions</a> of selectronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-And-Conditions-Terms-and-Conditions-Services (Terms-and-Conditions)</a> The Company of the implication of liability, independent of the Conditions of the Con



## **Test Report**

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 7 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)


(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路(GUO-ZE ROAD,KUNJIA HI-TECH INDUSTRIAL PARK,KUN-SHAN,JIANG-SU,CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE , SIHONG COUNTY , SUQIANCITY , JIANGSU PROVINCE , P, R , CHINA)

### <u> 重金屬流程圖 / Analytical flow chart of Heavy Metal (IEC 62321)</u>

根據以下的流程圖之條件,樣品已完全溶解。(六價鉻測試方法除外)/

These samples were dissolved totally by pre-conditioning method according to below flow chart. (Cr<sup>6+</sup> test method excluded)

- 測試人員:王志瑋 / Technician: JR Wang
- 测試負責人:張啟興 / Supervisor: Troy Chang

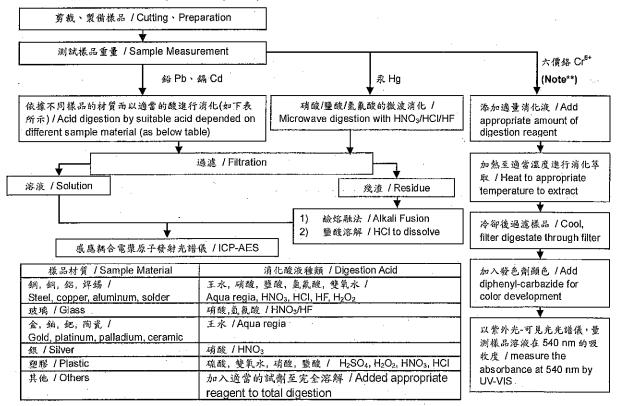

Note\*\*: (1) 針對非金屬材料加入鹼性消化液,加熱至 90~95℃ 萃取. / For non-metallic material, add alkaline digestion reagent and heat to 90~95℃.

(2) 針對金屬材料加入純水,加熱至沸騰萃取./For metallic material, add pure water and heat to boiling

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a>, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced, except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



## **Test Report**

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 8 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)


桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路(GUO-ZE ROAD,KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

> 根據以下的流程圖之條件,樣品已完全溶解。 / These samples were dissolved totally by pre-conditioning method according to below flow chart.

- 測試人員:王志瑋 / Technician: JR Wang
- 測試負責人:張啟與 / Supervisor: Troy Chang

### 元素以 ICP-AES 分析的消化流程圖 (Flow Chart of digestion for the elements analysis performed by ICP-AES)

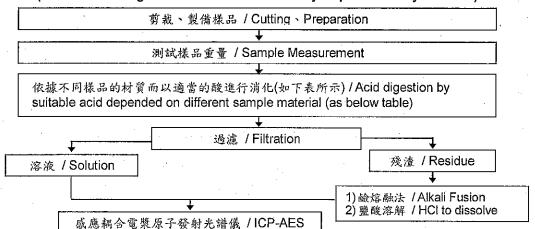

鋼,銅,鋁,焊錫 / Steel, copper, aluminum, solder	王水,硝酸,鹽酸,氫氟酸,雙氧水 / Aqua regia, HNO <sub>3</sub> , HCl, HF, H <sub>2</sub> O <sub>2</sub>
玻璃 / Glass	硝酸,氫氟酸 / HNO <sub>3</sub> /HF
金,鉑,鈀,陶瓷 / Gold, platinum, palladium, ceramic	王水 / Aqua regia
銀 / Silver	硝酸 / HNO₃
塑膠 / Plastic	硫酸,雙氧水,硝酸,鹽酸 / H <sub>2</sub> SO <sub>4</sub> , H <sub>2</sub> O <sub>2</sub> , HNO <sub>3</sub> , HCl
其他 / Others	加入適當的試劑至完全溶解 / Added appropriate reagent to total digestion

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions sasts">https://www.sgs.com/en/Terms-and-Conditions sasts</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-Document.aspx">https://www.sgs.com/en/Terms-and-Conditions/Terms-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exponents to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



## **Test Report**

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 9 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)


(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P. R., CHINA)

### 全氟辛酸/全氟辛烷磺酸分析流程圖 / Analytical flow chart - PFOA/PFOS

- 測試人員:涂雅苓 / Technician: Yaling Tu
- 測試負責人:張啟興 / Supervisor: Troy Chang

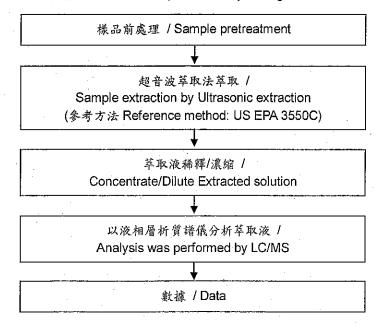

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions">http://www.sgs.com/en/Terms-and-Conditions</a> espx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditiong/Terms-and-Con



**Test Report** 

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 10 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)


(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿邁市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUGIANCITY, JIANGSU PROVINCE, P. R., CHINA)

#### 聚氯乙烯物質判定分析流程圖 / Analysis flow chart - PVC

- 測試人員: 涂雅苓 / Technician: Yaling Tu
- 測試負責人:張啟興 / Supervisor: Troy Chang

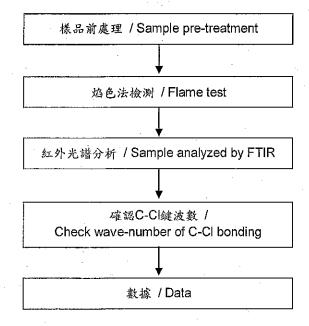

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-aspx.">http://www.sgs.com/en/Terms-and-Conditions-aspx.</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-



**Test Report** 

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 11 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.


(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.) (慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市箋朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE , SIHONG COUNTY , SUQIANCITY , JIANGSU PROVINCE , P, R , CHINA)

#### 六溴環十二烷分析流程圖 / Analytical flow chart - HBCDD

- 測試人員:涂雅苓 / Technician: Yaling Tu
- 測試負責人:張啟興 / Supervisor: Troy Chang

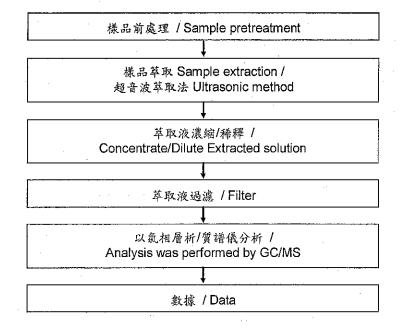

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-sex.">http://www.sgs.com/en/Terms-and-Conditions-sex.</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-end-Conditions-Terms-Document-aspx">http://www.sgs.com/en/Terms-end-Conditions-Terms-Document-aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any, the Company's sole responsibility is to its Client and this document does not excensing all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



**Test Report** 

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 12 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市箋朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE , SIHONG COUNTY , SUQIANCITY , JIANGSU PROVINCE , P, R , CHINA)

#### 鹵素分析流程圖 / Analytical flow chart - Halogen

- 測試人員:陳恩臻 / Technician: Rita Chen
- 測試負責人:張啟興 / Supervisor: Troy Chang

樣品前處理/分樣 / Sample pretreatment/separation 秤重及將樣品放入樣品槽中 / Weighting and putting sample in cell 燃燒彈/吸收 Oxygen Bomb Combustion / Absorption 稀釋至固定體積 / Dilution to fixed volume 離子層析儀分析 / Analysis was performed by IC

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-aspx.">http://www.sgs.com/en/Terms-and-Conditions-aspx.</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions-Aspx.</a> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



## **Test Report**

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12

頁數(Page): 13 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)


桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)

#### 可塑劑分析流程圖 / Analytical flow chart - Phthalate

- 測試人員:徐毓明 / Technician: Andy Shu
- 測試負責人:張啟興 / Supervisor: Troy Chang

【測試方法/Test method: IEC 62321-8】

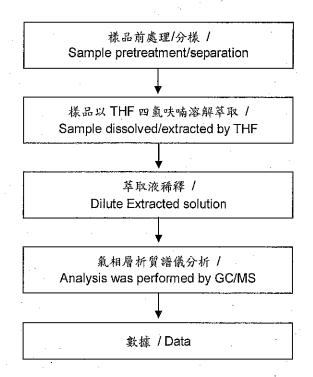

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.egs.com/en/Terms-and-Conditions-aspx">http://www.egs.com/en/Terms-and-Conditions-aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.egs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions-aspx and conditions/Terms-and-Conditions-aspx and conditions/Terms-and-Conditions-aspx and conditions-aspx and



## **Test Report**

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12 頁數(Page): 14 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)


桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市蹇朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P. R., CHINA)

#### 多溴聯苯/多溴聯苯醚分析流程圖 / Analytical flow chart - PBB/PBDE

- 測試人員:涂雅苓 / Technician: Yaling Tu
- 測試負責人:張啟興 / Supervisor: Troy Chang

初次測試程序 / First testing process \_ 選擇性篩檢程序 / Optional screen process \*\*\*\* 確認程序 / Confirmation process \_ . \_ . \_ . >

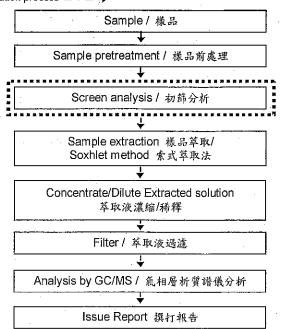

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-aspx.">http://www.sgs.com/en/Terms-and-Conditions-aspx.</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-shid-Conditions/Terms-and-Conditions/Terms



**Test Report** 

號碼(No.): CE/2016/C0807

日期(Date): 2016/12/12 頁數(Page): 15 of 15

西北臺慶科技股份有限公司 /TAI-TECH ADVANCED ELECTRONICS CO., LTD.

(臺慶精密電子(昆山)有限公司 / TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

(慶邦電子元器件 (泗洪) 有限公司 / TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)


桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN, R. O. C.)

(江蘇省昆山市篷朗昆嘉高科技工業區郭澤路(GUO-ZE ROAD,KUNJIA Hİ-TECH INDUSTRIAL PARK,KUN-SHAN,JIANG-SU,CHINA)) (中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 / THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD, ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, SUQIANCITY, JIANGSU PROVINCE, P, R, CHINA)


\* 照片中如有箭頭標示,則表示為實際檢測之樣品/部位. \*

(The tested sample / part is marked by an arrow if it's shown on the photo.)

CE/2016/C0807

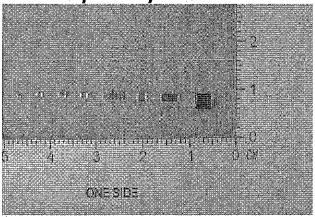

CE/2016/C0807

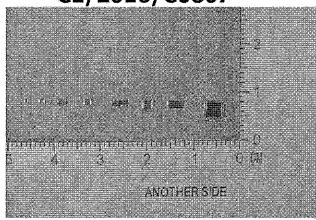

\*\* 報告結尾 (End of Report) \*\*

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sps.com/er/and">http://www.sps.com/er/and</a>, or electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/er/and-conditions/lembsed-drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained be findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to tunless otherwise stated the results shown in this test report refer only to the sample(s) tested.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for taitec manufacturer:

Other Similar products are found below:

TMPC1205HP-4R7MG-D TMPC0624H-4R7MG-D TMPC0402HP-R10YG-Z02 TMPC0502HP-R68MG-D TMPC0518HP-R47MG-D TMPC1707HP-3R3MG-D HPC6045NF-1R0M TMPA0603S-1R5MN-D TMPC1004H-470MG-D TMPC0603H-1R0MG-D HPC5020CF-2R2Y TMPA0603S-330MN-D HPC6045NF-100MTH TMPC0618H-1R0MG-D WCM4532F2SF-601T15 TMPA0605S-4R7MN-D TMPC1207F-470M WCM3216F2SV-102T02 TMPF0603A-3R3MN-D TMPC1265HP-100MG-D TMPC0502HP-6R8MG-D TMPC1265HP-2R2MG-D UHP252012NF-R47M HCB3216KF-501T30 AHP201610TF-R68M-1 HPC5020NF-1R0Y TMPC0412HP-R12MG-Z03 TMPC1206HP-101MG-D HPC5040NF-3R3M HPC8040NF-8R2M TMPC1205HP-330MG-D TMPA1206SP-100MN-D UHP252012NF-1R0MT01 HPC5040NF-2R2M HSF2012F2SF-670T04 TMPC1235HP-2R2MG-D TMPC1004H-1R0MG-D TMPA1004S-1R0MN-D TMPC0615H-220MG-D DFP201610TF-R47M AHP201610AF-2R2M TMPC0512HP-4R7MG-D TMPC0602H-220MG-D WCM3216F2SF-102T02 TMPC0624H-R22MG-D TMPC1265HP-R82MG-D TMPC0603H-6R8MG-D FCM2012CF-600T07 FCM2012CF-221T04 FCI2012F-R12K