

Specification for Approval

Date: 2012/10/18

Customer : _____

TAI-TECH P/N: CPI252010HF-Series

CUSTOMER P/N: _____

DESCRIPTION: _____

QUANTITY: _____ pcs

REMARK:		
Customer Approval Feedback		

西北臺慶科技股份有限公司
TAI-TECH Advanced Electronics Co., Ltd

西北臺慶科技股份有限公司
 TAI-TECH Advanced Electronics Co., Ltd
 Headquarter:
 NO.1 YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI,
 TAO-YUAN HSIEN, TAIWAN, R.O.C.
 TEL: +886-3-4641148 FAX: +886-3-4643565
 http://www.tai-tech.com.tw
 E-mail: sales@tai-tech.com.tw

東莞臺慶精密電子有限公司
 DONGGUAN TAI-TECH ADVANCED ELECTRONICS CO., LTD
 JITIGANG MANAGEMENT DISTRICT, HUANGJIANG, DONGGUAN,
 GUANGDONG, CHINA
 TEL: +86-769-3365488 FAX: +86-769-3366896
 E-mail: twnwe@pub.dgnet.gd.cn

Office:
 金亨國際有限公司
 KAMHENG INTERNATIONAL LIMITED
 TEL: +86-852-25772033 FAX: +86-852-28817778
 臺慶精密電子(昆山)有限公司
 TAI-TECH ADVANCED ELECTRONICS(KUNSHAN) CO., LTD
 SHINWHA ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN,
 JIANG-SU, CHINA
 TEL: +86-512-57619396 FAX: +86-512-57619688
 E-mail: hui@tai-tech.com.tw

Office:
 北欣國際有限公司
 NORTH STAR INTERNATIONAL LIMITED
 TEL: +86-512-57619396 FAX: +86-512-57619688

Sales Dep.

APPROVED	CHECKED
管哲頌 Eric Guan	魏佑娟 Donna Wei

R&D Center

APPROVED	CHECKED	DRAWN
楊祥忠 Mike Yang	羅培君 Peijun Lo	張嘉玲 Alin Chang


High Current Ferrite Chip Inductor (Lead Free) CPI252010HF -Series

1.Features

1. 2.5x2.0 mm and 1 mm in height (very compact size): CAE and fine printing technology made this compact size possible
2. Stable minimum DC resistance in the class.
3. High speed mounting: Using SMT mounter makes less than a second mounting possible.
4. Excellent mounting strength by SMD chip making.
5. Reduced noise over 2/3 of coil inductor by optimal design of CAD
Completely lead-free product and support lead-free solder.



2. Dimensions




Chip Size				
Series	A(mm)	B(mm)	C(mm)	D(mm)
252010	2.5±0.2	2.0±0.2	1.0max.	0.5±0.3

3. Part Numbering



- A: Series
 - B: Dimension
 - C: Category Code
 - D: Material
 - E: Inductance
 - F: Inductance Tolerance
 - G: Rated Current
- L x W
- Lead Free Material
- 1R5=1.5uH
- M=±20%
- 1A4=1400mA


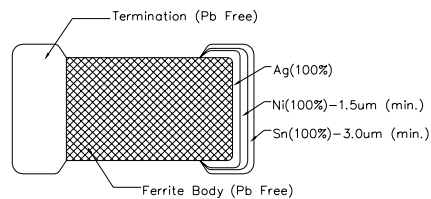





4.Specification

Tai-Tech Part Number	Inductance(uH)	Test Frequency (MHz)	Rated Current (mA) max.	DCR ()	SRF (MHz) min.
CPI252010HF-1R0M-1A5	1.0±20%	1	1500	0.10±30%	90
CPI252010HF-1R5M-1A4	1.5±20%	1	1400	0.12±30%	60
CPI252010HF-2R2M-1A3	2.2±20%	1	1300	0.14±30%	50
CPI252010HF-3R3M-1A2	3.3±20%	1	1200	0.18±30%	40
CPI252010HF-4R7M-1A0	4.7±20%	1	1000	0.23±30%	35
CPI252010HF-6R8M-0A7	6.8±20%	1	700	0.25±30%	30
CPI252010HF-100M-0A8	10±20%	1	800	0.30±30%	20

Rated Current : based on temperature rise test

5. Reliability and Test Condition

Item	Performance		Test Condition						
Operating Temperature	-40~+105 (Including self-temperature rise)		--						
Transportation Storage Temperature	-40~+105		For long storage conditions, please see the Application Notice						
Inductance (Ls)	Refer to standard electrical characteristics list		Agilent4291 Agilent E4991 Agilent4287 Agilent16192						
DC Resistance			Agilent 4338						
Rated Current			DC Power Supply Over Rated Current requirements, there will be some risk						
Temperature Rise Test	Rated Current < 1A ΔT 20 Max Rated Current 1A ΔT 40 Max		1. Applied the allowed DC current. 2. Temperature measured by digital surface thermometer.						
Solder heat Resistance	Appearance: No significant abnormality. Inductance change: Within ± 10%.	No mechanical damage. Remaining terminal electrode: 75% min.	Preheat: 150 ,60sec. Solder: Sn-Cu0.5 Solder temperature: 260±5 Flux for lead free: ROL0 Dip time: 10±0.5sec. 						
Solderability	More than 95% of the terminal electrode should be covered with solder.		Preheat: 150 ,60sec. Solder: Sn-Cu0.5 Solder temperature: 245±5 Flux for lead free: ROL0 Dip time: 4±1sec.						
Terminal strength	The terminal electrode and the dielectric must not be damaged by the forces applied on the right conditions.		Size Force (Kgf) Time(sec) 2520 1.0 >30						
Flexure strength	The terminal electrode and the dielectric must not be damaged by the forces applied on the right conditions.		Solder a chip on a test substrate, bend the substrate by 2mm (0.079in) and return. The duration of the applied forces shall be 60 (+ 5) Sec.						
Bending Strength	The ferrite should not be damaged by Forces applied on the right condition.		<table border="1"> <thead> <tr> <th>Size</th> <th>mm(inches)</th> <th>P-Kgf</th> </tr> </thead> <tbody> <tr> <td>2520</td> <td>1.40(0.055)</td> <td>1.0</td> </tr> </tbody> </table>	Size	mm(inches)	P-Kgf	2520	1.40(0.055)	1.0
Size	mm(inches)	P-Kgf							
2520	1.40(0.055)	1.0							
Random Vibration Test	Appearance: Cracking, chipping and any other defects harmful to the characteristics should not be allowed. Inductance: within±10%		Frequency: 10-55-10Hz for 15 min. Amplitude: 1.52mm Directions and times: X, Y, Z directions for 15 min.. This cycle shall be performed 12 times in each of three mutually perpendicular directions (Total 9hours).						
Drop	a: No mechanical damage b: Inductance change: : within±10%		Drop 10 times on a concrete floor from a height of 75cm						

Item	Performance	Test Condition
Life testing at High Temperature	Appearance: no damage.	Temperature: 85±2 Applied current: rated current. Duration: 1000±12hrs. Measured at room temperature after placing for 2 to 3hrs.
Humidity	Inductance: within±10%of initial value.	Humidity: 90~95%RH. Temperature: 40±2 . Duration: 504±8hrs. Measured at room temperature after placing for 2 to 3hrs.
Thermal shock	Appearance: no damage. Inductance: within±10%of initial value.	Condition for 1 cycle Step1: -40±2 30±5 min. Step2: +105±2 30±5 min. Number of cycles: 500 Measured at room temperature after placing for 2 to 3 hrs.
Low temperature storage test		Temperature: -40±2 . Duration: 500±8hrs. Measured at room temperature after placing for 2 to 3hrs.


Phase	Temperature()	Time(min.)
1	-40±2	30±5
2	room temp.	0.5
3	+105±2	30±5

Measured: 500 tim

6.Soldering and Mounting

6-1. Recommended PC Board Pattern

Chip Size						Land Patterns For Reflow Soldering		
Serie	Type	A(mm)	B(mm)	C(mm)	D(mm)	L(mm)	G(mm)	H(mm)
CPI	252010	2.5±0.2	2.0±0.2	1.0 max.	0.5±0.30	3.90	1.50	1.50



PC board should be designed so that products can prevent damage from mechanical stress when warping the board.
Products shall be positioned in the sideway direction against the mechanical stress to prevent failure.

6-2. Soldering

Mildly activated rosin fluxes are preferred. The terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.
Note.

If wave soldering is used ,there will be some risk.

Re-flow soldering temperatures below 240 degrees, there will be non-wetting risk

6-2.1 Lead Free Solder re-flow:

Recommended temperature profiles for lead free re-flow soldering in Figure 1.


6-2.2 Soldering Iron:

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended. for Iron Soldering in Figure 2.


Preheat circuit and products to 150
350 tip temperature (max)

Never contact the ceramic with the iron tip
1.0mm tip diameter (max)

Use a 20 watt soldering iron with tip diameter of 1.0mm
Limit soldering time to 4-5sec.

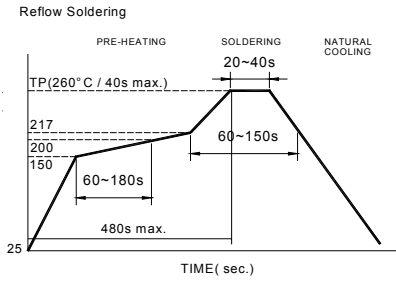

Reflow times: 3 times max
Fig.1

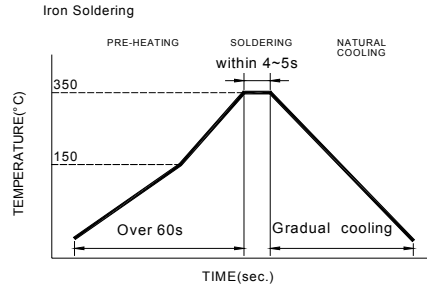


Iron Soldering times : 1 times max
Fig.2

6-2.3 Solder Volume:


Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceeded as shown in right side:

Minimum fillet height = soldering thickness + 25% product height

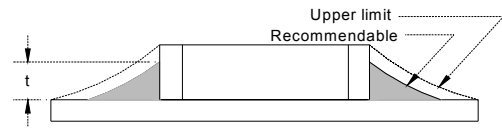


7. Packaging Information

7-1. Reel Dimension

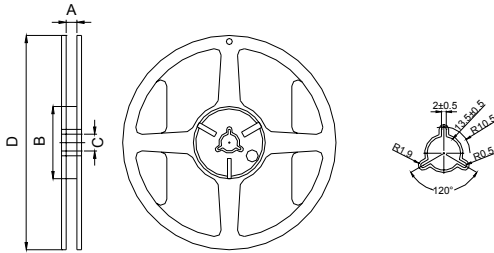

Type	A(mm)	B(mm)	C(mm)	D(mm)
7"×8mm	9±0.5	60±2	13.5±0.5	178±2

7-2. Tape Dimension / 8mm

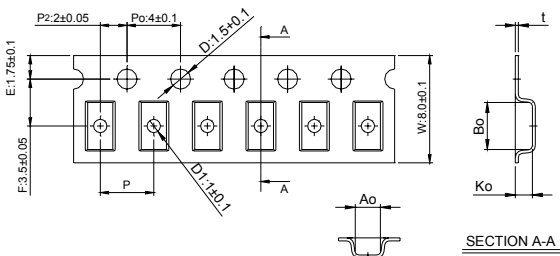


Size	P(mm)	Bo(mm)	Ao(mm)	Ko(mm)	t(mm)
252010	4.0±0.1	2.74±0.10	2.29±0.10	1.45max	0.30max

7-3. Packaging Quantity

Chip size	252010
Reel	3000
Inner box	15000
Middle box	75000
Carton	150000

7-4. Tearing Off Force

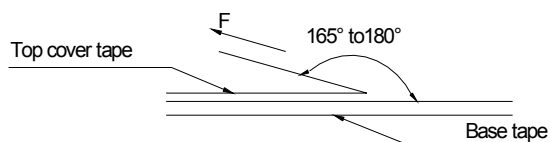

The force for tearing off cover tape is 15 to 60 grams in the arrow direction under the following conditions.

Room Temp. ()	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min
5~35	45~85	860~1060	300

Application Notice

Storage Conditions



To maintain the solder ability of terminal electrodes:

1. TAI-TECH products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
2. Temperature and humidity conditions: 40 and 60% RH.
3. Recommended products should be used within 12 months from the time of delivery.
4. The packaging material should be kept where no chlorine or sulfur exists in the air.

Transportation

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.

Typical Inductance v.s. Frequency Curve

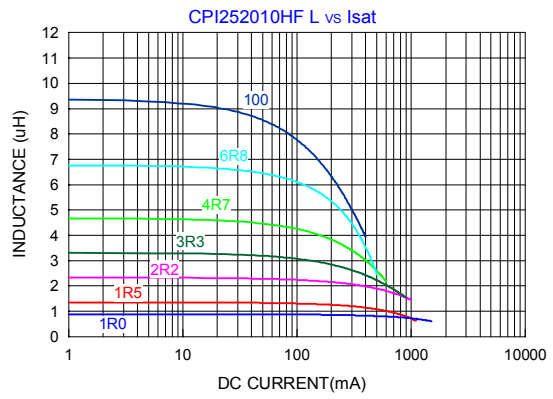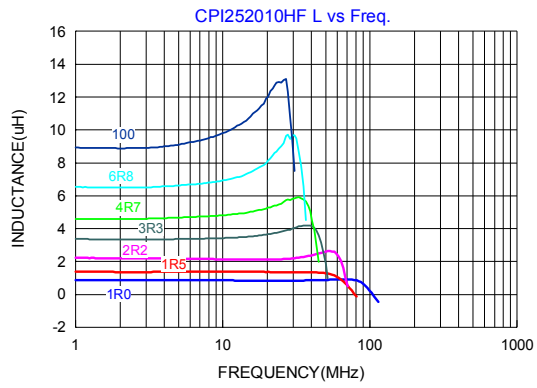

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Tai-Tech](#) manufacturer:

Other Similar products are found below :

[CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#)