



Specification for Approval

Date: 2024/05/13





Customer: 宏業興

	TAI-TE	СН	P/N:		Н	CB	321	6KF	-50)1T	10					
	CUSTOMER P/N:													_		
	DESCRIPTION:													_		
	QUANT	ΓΙΤ	/ :							pcs	<u> </u>					
BEN	MARK:															
KEN	MARK:															
				Cu	ston	ner A	Appr	ova	l Fe	edba	ack					
		西	北		慶	科	技	股	份	有	限	公	司			

TAI-TECH Advanced Electronics Co., Ltd

□西北臺慶科技股份有限公司

TAI-TECH Advanced Electronics Co., Ltd Headquarter:

NO.1 YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI,

TAO-YUAN HSIEN, TAIWAN, R.O.C. TEL: +886-3-4641148 FAX: +886-3-4643565

http://www.tai-tech.com.tw E-mail: sales@tai-tech.com.tw

□Office:

深圳辦公室

11BC,Building B Fortune Plaza,NO.7002, Shennan Avenue, Futian District Shenzhen

TEL: +86-755-23972371 FAX: +86-755-23972340

■臺慶精密電子(昆山)有限公司

TAI-TECHADVANCED ELECTRONICS(KUNSHAN) CO., LTD SHINWHA ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA

TEL: +86-512-57619396 FAX: +86-512-57619688

E-mail: sales@tai-tech.cn

□慶邦電子元器件(泗洪)有限公司

TAIPAQ ELECTRONICS (SIHONG) CO., LTD

The South HangZhou Road and The East JianSheBei Road,Economic Development Zone,SiHong County, JiangSu Province,P.R,China. TEL: +86-527-88601191 FAX: +86-527-88601190

E-mail: sales@taipaq.cn

Sales Dep.

APPROVED	CHECKED
管哲頎 Eric Guan	蒯青榮

R&D Center

APPROVED	CHECKED	DRAWN
鄧福興	浦冬生	王俞琴

High Current Ferrite Chip Bead(Lead Free)

HCB3216KF-501T10

ECN HISTORY LIST									
REV	DATE	DESCRIPTION	APPROVED	CHECKED	DRAWN				
1.0	13/06/06	變更可靠度條件	楊祥忠	羅培君	張嘉玲				
2.0	14/01/24	變更電鍍錫層厚度 3.0um min.=>3.5um min.	楊祥忠	羅培君	張嘉玲				
3.0	14/08/01	變更 Reflow 圖示	楊祥忠	羅培君	張嘉玲				
3.1	14/08/01	修正包裝帶尺寸	楊祥忠	羅培君	張嘉玲				
4.0	16/01/26	增訂可靠度 Thermal shock: (Bead) Step3:125±2℃ 30±5min	楊祥忠	詹偉特	張嘉玲				
5.0	17/02/16	修訂 Recommended PC Board Pattern	楊祥忠	詹偉特	張嘉玲				
6.0	20/08/01	更新 Reflow 依 IPC EDEC J-STD-020E	鄧福興	浦冬生	王俞琴				
7.0	22/12/05	更新可靠度及更正 Reflow 敘述	鄧福興	浦冬生	王俞琴				
備									
註									

TAI-TECH KBM02-240500275 P2.


High Current Ferrite Chip Bead(Lead Free)

HCB3216KF-501T10

1.Features

- 1. Monolithic inorganic material construction.
- 2. Closed magnetic circuit avoids crosstalk.
- 3. Suitable for reflow soldering.
- 4. Shapes and dimensions follow E.I.A. spec.
- 5. Available in various sizes.
- 6. Excellent solder ability and heat resistance.
- 7. High reliability.
- 8. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
- 9. Low DC resistance structure of electrode to prevent wasteful electric power consumption.
- 10.Operating Temperature : -55~+125 $^{\circ}$ C (Including self-temperature rise)

2. Dimensions




A 3 20+0 20							
A 3.20±0.20							
B 1.60±0.20							
C 1.10±0.20							
D 0.50±0.30							

Units: mm

3.Part Numbering








4. Specification

Tai-Tech Part Number			DC Resistance (Ω) max.	Rated Current (mA) max.
HCB3216KF-501T10	500±25%	60mV/100M	0.20	1000

- Rated current: based on temperature rise test
- In compliance with EIA 595
- ◆ All test data referenced to 25°C ambient
- Impedance-Frequency Characteristics



www.tai-tech.com.tw

TAI-TECH KBM02-240500275

5. Reliability and Test Condition


Series No. Operating Temperature Transportation Storage Temperature	FCB	FCM		HCB	GHB		FCA					
Transportation												
		(Inclu		55∼+125℃ self-temperatu	re rise)							
	-55~+125°C (on board)							For long			ns, please	see the
Impedance (Z)	Refer to stan	dard electrical	charac	rteristics list				Agilent4: Agilent E Agilent4: Agilent1	E4991 287			
DC Resistance	rtoror to otari		Agilent 4									
Rated Current										ly ent requir	ements, the	ere will be
Temperature Rise Test		1A ΔT 20℃Max ≧ 1A ΔT 40℃M						2. Tempe		lowed DC neasured	current. by digital si	urface
Life test	•	no damage. within±15%of ir ±15% of initial			exceed the s	specifica	ation value	times.(II Reflow F Tempera Applied Duration Measure for 24±2 Precond	PC/JED Profiles) hture: 12 current: : 1000± ed at ro hrs. itioning: PC/JED Profiles) r: 85±3%	EC J-STD 5±2℃ rated curr 12hrs. om tempe Run thre EC J-STD 6R.H.	ough refle- -020E Classent. erature after ough refle- -020E Class	er placing
Thermal shock		no damage. within±15%of ir ±15% of initial			exceed the s	specifica	ation value	ent , In Measure for 24±2 Precond times.(II Reflow F Conditio Step1: -{ Step2: 1 Step3: 1 Number Measure for 24±2	Duration:1000hrsMin.Bead:with100%ratedcurent · Inductance: with 10% rated currer Measured at room temperature after placing for 24±2 hrs. Preconditioning: Run through reflow for times.(IPC/JEDEC J-STD-020E Classification Reflow Profiles) Condition for 1 cycle Step1: -55±2°C 30±5 min. Step2: 125±2°C 30±5 min. Number of cycles: 500 Measured at room temperature after placing for 24±2 hrs.			
Vibration	Impedance :	: No damage. within±15% of ±15% of initial			exceed the s	specifica	ation value	times.(II Reflow F Oscillation for 20 m Equipment Total Am Testing	Preconditioning: Run through reflow for 3 times.(IPC/JEDEC J-STD-020E Classification Reflow Profiles) Oscillation Frequency: 10Hz ~ 2KHz ~ 10Hz for 20 minutes Equipment: Vibration checker Total Amplitude:10g Testing Time: 12 hours(20 minutes, 12 cycles each of 3 orientations) °			
Bending	Impedance :	: No damage. within±10% of ±15% of initial			exceed the s	specifica	ation value	following >=0805in <0805in Bending >=0805in <0805in	Shall be mounted on a FR4 substrate of the following dimensions: >=0805inch(2012mm):40x100x1.2mm <0805inch(2012mm):40x100x0.8mm Bending depth: >=0805inch(2012mm):1.2mm <0805inch(2012mm):0.8mm Duration of 10 sec for a min.			
								Test co	ndition			
Shock	Impedance :	: No damage. within±10% of ±15% of initial			aveged the s	enecific	ation value	Туре	Peak Value (g's)	Normal duration (D) (ms)	Wave form	Velocity change (Vi)ft/sec
	NDO · WILLIIII	= 10 /0 Or Hillidi	value	and snall HUL	CACCEG IIIE S	PCUIIC	ation value	SMD	50 50	11	Half-sine Half-sine	11.3
Solderability	More than 95	% of the termin	nal elec	ctrode should l	be covered v	vith solo	der.	a.Method @235°C	d B, ±5°C Te	4 hrs (est time:5	@155°C co+0/-0.5 seco	dry heat

TAI-TECH KBM02-240500275

Item	Performance	Test Condition
		Number of heat cycles: 1
Resistance to Soldering Heat	Appearance : No damage.	Temperature (°C) Time (s) Temperature ramp/immersion and emersion rate
	Impedance: within±15% of initial value RDC: within±15% of initial value and shall not exceed the specification value and shall not exceed the specification value.	ue 260 ±5 (solder temp) 10 ±1 25mm/s ±6 mm/s
		Depth: completely cover the termination
Terminal strength	Appearance : No damage. Impedance : within±15% of initial value RDC : within ±15% of initial value and shall not exceed the specification value	Preconditioning: Run through reflow for 3 times.(IPC/JEDEC J-STD-020E Classification Reflow Profiles) Component mounted on a PCB apply a force >0805inch(2012mm):1kg <=0805inch(2012mm):0.5kg to the side of a device being tested. This force shall be applied for 60 +1 seconds. Also the force shall be applied gradually as not to shock the component being tested.

**Derating Curve


For the ferrite chip bead which withstanding current over 1.5A, as the operating temperature over $85^{\circ}\mathrm{C}$, the derating current information is necessary to consider with. For the detail derating of current, please refer to the Derated Current vs. Operating Temperature curve.




6. Soldering and Mounting

6-1. Recommended PC Board Pattern

			Pattern w Sold	• • • •				
Series	Type	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)
FCB	1005	1.0±0.10	0.50±0.10	0.50±0.10	0.25±0.10	0.50	0.40	0.60
FCM	1608	1.6±0.15	0.80±0.15	0.80±0.15	0.30±0.20	0.80	0.85	0.95
<mark>нсв</mark>	2012	2.0±0.20	1.25±0.20	0.85±0.20	0.50±0.30	1.05	1.00	1.45
GHB	2012	2.0±0.20	1.25±0.20	1.25±0.20	0.50±0.30	1.05	1.00	1.45
FCI	<mark>3216</mark>	3.2±0.20	1.60±0.20	1.10±0.20	0.50±0.30	<mark>1.05</mark>	<mark>2.20</mark>	<mark>1.80</mark>
FHI	3225	3.2±0.20	2.50±0.20	1.30±0.20	0.50±0.30	1.05	2.20	2.70
FCH	4516	4.5±0.20	1.60±0.20	1.60±0.20	0.50±0.30	1.05	3.30	1.80
нсі	4532	4.5±0.20	3.20±0.20	1.50±0.20	0.50±0.30	1.05	3.30	3.40



Land
Solder Resist



PC board should be designed so that products can prevent damage from mechanical stress when warping the board.

6-2. Soldering

Mildly activated rosin fluxes are preferred. TAI-TECH terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

TAI-TECH KBM02-240500275 P5.

6-2.1 Soldering Reflow:

Recommended temperature profiles for lead free re-flow soldering in Figure 1. Table 1.1&1.2 (J-STD-020E)

6-2.2 Soldering Iron:

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended. (Figure 2.)

- Preheat circuit and products to 150°C
 350°C tip temperature (max)
- Never contact the ceramic with the iron tip

• 1.0mm tip diameter (max)

- Use a 20 watt soldering iron with tip diameter of 1.0mm
- · Limit soldering time to 4~5sec.

Fig.1 Soldering Reflow





Fig.2 Iron soldering temperature profiles



Iron Soldering times: 1 times max

itellow times. 5 times max

Table (1.1): Reflow Profiles

Profile Type:	Pb-Free Assembly
Preheat -Temperature Min(T _{smin}) -Temperature Max(T _{smax}) -Time(t _s)from(T _{smin} to T _{smax})	150°C 200°C 60-120seconds
Ramp-up rate(T _L to T _p)	3℃/second max.
Liquidus temperature(T _L) Time(t _L)maintained above T _L	217℃ 60-150 seconds
Classification temperature(T _c)	See Table (1.2)
Time(tp) at Tc- $5^{\circ}\mathrm{C}$ (Tp should be equal to or less than Tc.)	< 30 seconds
Ramp-down rate(T _p to T _L)	6℃ /second max.
Time 25℃ to peak temperature	8 minutes max.

Tp: maximum peak package body temperature, Tc: the classification temperature.

For user (customer) ${\bf Tp}$ should be equal to or less than ${\bf Tc.}$

Table (1.2) Package Thickness/Volume and Classification Temperature (Tc)


	Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
	<1.6mm	260°C	260°C	260°C
PB-Free Assembly	1.6-2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

Reflow is referred to standard IPC/JEDEC J-STD-020E $\,^{\circ}$

6-2.3 Solder Volume:

Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceed as shown in right side:


Minimum fillet height = soldering thickness + 25% product height



TAI-TECH KBM02-240500275

7.Packaging Information


7-1. Reel Dimension




Туре	A(mm)	B(mm)	C(mm)	D(mm)
7"x8mm	9.0±0.5	<mark>60±2</mark>	13.5±0.5	178±2
7"x12mm	13.5±0.5	60±2	13.5±0.5	178±2

7-2.1 Tape Dimension / 8mm

■Material of taping is paper




Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)
100505	1.12±0.03	0.62±0.03	0.60±0.03	2.0±0.05	0.60±0.03




Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)
160808	1.80±0.05	0.96+0.05/-0.03	0.95±0.05	4.0±0.10	0.95±0.05
201209	2.10±0.05	1.30±0.05	0.95±0.05	4.0±0.10	0.95±0.05

■Material of taping is plastic



Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)	D1(mm)
201212	2.10±0.10	1.28±0.10	1.28±0.10	4.0±0.10	0.22±0.05	1.0±0.10
<mark>321611</mark>	3.35±0.10	1.75±0.10	<mark>1.25±0.10</mark>	4.0±0.10	0.23±0.05	1.0±0.10
322513	3.42±0.10	2.77±0.10	1.55±0.10	4.0±0.10	0.22±0.05	1.0±0.10
321609	3.40±0.10	1.77±0.10	1.04±0.10	4.0±0.10	0.22±0.05	1.0±0.10

7-2.2 Tape Dimension / 12mm




Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)	D1(mm)
451616	4.70±0.10	1.75±0.10	1.75±0.10	4.0±0.10	0.24±0.05	1.5±0.10
453215	4.70±0.10	3.45±0.10	1.60±0.10	8.0±0.10	0.24±0.05	1.5±0.10

TAI-TECH KBM02-240500275

7-3. Packaging Quantity

Chip Size	453215	451616	322513	<mark>321611</mark>	321609	201212	201209	160808	100505
Chip / Reel	1000	2000	2500	<mark>3000</mark>	3000	2000	4000	4000	10000
Inner box	4000	8000	12500	<mark>15000</mark>	15000	10000	20000	20000	50000
Middle box	20000	40000	62500	<mark>75000</mark>	75000	50000	100000	100000	250000
Carton	40000	80000	125000	<mark>150000</mark>	150000	100000	200000	200000	500000

7-4. Tearing Off Force



The force for tearing off cover tape is 15 to 60 grams in the arrow direction under the following conditions.

Room Temp.	Room Humidity	Room atm	Tearing Speed
(℃)	(%)	(hPa)	mm/min
5~35	45~85	860~1060	300

Application Notice

Storage Conditions(component level)

To maintain the solder ability of terminal electrodes:

- 1. TAI-TECH products meet IPC/JEDEC J-STD-020E standard-MSL, level 1.
- 3. Recommended products should be used within 12 months from the time of delivery.
- 4. The packaging material should be kept where no chlorine or sulfur exists in the air.
- Transportation
 - 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
 - 2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
 - 3. Bulk handling should ensure that abrasion and mechanical shock are minimized.





Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 1 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

以下測試樣品係由申請廠商所提供及確認 (The following sample(s) was/were submitted and identified by the applicant as):

樣品名稱(Sample Name)

: FERRITE CHIP BEAD - FERRITE CHIP INDUCTOR - ARRAY - MCF - MCM -

YMV APM SERIES

樣品型號(Style/Item No.)

FERRITE CHIP BEAD . FERRITE CHIP INDUCTOR . ARRAY . MCF . MCM .

YMV APM SERIES

收件日(Sample Receiving Date)

28-Nov-2023

測試期間(Testing Period)

28-Nov-2023 to 05-Dec-2023

測試需求(Test Requested)

依據客戶要求進行測試‧測試項目請參閱測試結果表格。 (Testing item(s) is/are

specified by client. Please refer to result table for testing item(s).)

測試結果(Test Results)

請參閱下一頁 (Please refer to following pages.)





PIN CODE: E94C4B9



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 2 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P.R · CHINA)

測試部位敘述 (Test Part Description)

No.1 : 整體混測 (MIXED ALL PARTS)

測試結果 (Test Results)

測試項目 (Test Items)	測試方法 (Method)	單位 (Unit)	MDL	結果 (Result) No.1
鎘 (Cd) (Cadmium (Cd))	參考IEC 62321-5: 2013 · 以感應耦合電漿發射光譜儀分析。(With reference to IEC	mg/kg	2	n.d.
鉛 (Pb) (Lead (Pb))	62321-5: 2013, analysis was performed by ICP-OES.)	mg/kg	2	n.d.
汞 (Hg) (Mercury (Hg))	參考IEC 62321-4: 2013 + AMD1: 2017 · 以 感應耦合電漿發射光譜儀分析。(With reference to IEC 62321-4: 2013 + AMD1: 2017, analysis was performed by ICP-OES.)	mg/kg	2	n.d.
六價鉻 Cr(VI) (Hexavalent Chromium Cr(VI))	参考IEC 62321-7-2: 2017·以紫外光-可見光分光光度計分析。(With reference to IEC 62321-7-2: 2017, analysis was performed by UV-VIS.)	mg/kg	8	n.d.
一溴聯苯 (Monobromobiphenyl)		mg/kg	5	n.d.
二溴聯苯 (Dibromobiphenyl)		mg/kg	5	n.d.
三溴聯苯 (Tribromobiphenyl)		mg/kg	5	n.d.
四溴聯苯 (Tetrabromobiphenyl)		mg/kg	5	n.d.
五溴聯苯 (Pentabromobiphenyl)	参考IEC 62321-6: 2015 · 以氣相層析儀/質譜	mg/kg	5	n.d.
六溴聯苯 (Hexabromobiphenyl)	儀分析。(With reference to IEC 62321-6:	mg/kg	5	n.d.
七溴聯苯 (Heptabromobiphenyl)	2015, analysis was performed by GC/MS.)	mg/kg	5	n.d.
八溴聯苯 (Octabromobiphenyl)		mg/kg	5	n.d.
九溴聯苯 (Nonabromobiphenyl)		mg/kg	5	n.d.
十溴聯苯 (Decabromobiphenyl)		mg/kg	5	n.d.
多溴聯苯總和 (Sum of PBBs)		mg/kg	i.e.	n.d.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com.tw/terms-of-service and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at https://www.sgs.com.tw/terms-of-service. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 3 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

測試項目	測試方法	單位	MDL	結果
(Test Items)	(Method)	(Unit)		(Result)
				No.1
一溴聯苯醚 (Monobromodiphenyl ether)		mg/kg	5	n.d.
二溴聯苯醚 (Dibromodiphenyl ether)		mg/kg	5	n.d.
三溴聯苯醚 (Tribromodiphenyl ether)		mg/kg	5	n.d.
四溴聯苯醚 (Tetrabromodiphenyl ether)		mg/kg	5	n.d.
五溴聯苯醚 (Pentabromodiphenyl ether)	參考IEC 62321-6: 2015 · 以氣相層析儀/質譜	mg/kg	5	n.d.
六溴聯苯醚 (Hexabromodiphenyl ether)	儀分析。(With reference to IEC 62321-6:	mg/kg	5	n.d.
七溴聯苯醚 (Heptabromodiphenyl ether)	2015, analysis was performed by GC/MS.)	mg/kg	5	n.d.
八溴聯苯醚 (Octabromodiphenyl ether)		mg/kg	5	n.d.
九溴聯苯醚 (Nonabromodiphenyl ether)		mg/kg	5	n.d.
十溴聯苯醚 (Decabromodiphenyl ether)	1	mg/kg	5	n.d.
多溴聯苯醚總和 (Sum of PBDEs)		mg/kg	141	n.d.
鄰苯二甲酸丁苯甲酯 (BBP) (Butyl benzyl		mg/kg	50	n.d.
phthalate (BBP))				
鄰苯二甲酸二丁酯 (DBP) (Dibutyl		mg/kg	50	n.d.
phthalate (DBP))		E-937 (3)53		
鄰苯二甲酸二(2-乙基己基)酯 (DEHP) (Di-		mg/kg	50	n.d.
(2-ethylhexyl) phthalate (DEHP))	<u> </u>			
鄰苯二甲酸二異丁酯 (DIBP) (Diisobutyl	參考IEC 62321-8: 2017 · 以氣相層析儀/質譜 儀分析。(With reference to IEC 62321-8:	mg/kg	50	n.d.
phthalate (DIBP))	2017, analysis was performed by GC/MS.)			
鄰苯二甲酸二異癸酯 (DIDP) (Diisodecyl	2017, analysis was performed by GC/MS.)	mg/kg	50	n.d.
phthalate (DIDP)) (CAS No.: 26761-40-		DBS 290		
0, 68515-49-1)				
鄰苯二甲酸二異壬酯 (DINP) (Diisononyl		mg/kg	50	n.d.
phthalate (DINP)) (CAS No.: 28553-12-				
0, 68515-48-0)				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com.tw/terms-of-service. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 4 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

測試項目 (Test Items)	測試方法 (Method)	單位 (Unit)	MDL	結果 (Result) No.1
鄰苯二甲酸二正辛酯 (DNOP) (Di-n-octyl phthalate (DNOP)) (CAS No.: 117-84-0)		mg/kg	50	n.d.
鄰苯二甲酸二正戊酯 (DNPP) (Di-n-pentyl phthalate (DNPP)) (CAS No.: 131-18-0)	參考IEC 62321-8: 2017 · 以氣相層析儀/質譜 儀分析。(With reference to IEC 62321-8: 2017, analysis was performed by GC/MS.)	mg/kg	50	n.d.
鄰苯二甲酸二正己酯 (DNHP) (Di-n-hexyl phthalate (DNHP)) (CAS No.: 84-75-3)		mg/kg	50	n.d.
六溴環十二烷及所有主要被辨別出的異構物(HBCDD) (α - HBCDD, β - HBCDD, γ - HBCDD) (Hexabromocyclododecane (HBCDD) and all major diastereoisomers identified (α - HBCDD, β - HBCDD, γ - HBCDD)) (CAS No.: 25637-99-4, 3194-55-6 (134237-51-7, 134237-50-6, 134237-52-8))	參考IEC 62321-9: 2021 · 以氣相層析儀/質譜儀分析。(With reference to IEC 62321-9: 2021, analysis was performed by GC/MS.)	mg/kg	20	n.d.
氟 (F) (Fluorine (F)) (CAS No.: 14762-94-8)		mg/kg	50	n.d.
氯 (CI) (Chlorine (CI)) (CAS No.: 22537- 15-1)	参考BS EN 14582: 2016·以離子層析儀分析。(With reference to BS EN 14582: 2016,	mg/kg	50	n.d.
溴 (Br) (Bromine (Br)) (CAS No.: 10097- 32-2)	analysis was performed by IC.)	mg/kg	50	n.d.
碘 (I) (Iodine (I)) (CAS No.: 14362-44-8)		mg/kg	50	n.d.
	参考CEN/TS 15968: 2010 · 以液相層析串聯 質譜儀分析。(With reference to CEN/TS	mg/kg	0.01	n.d.
全氟辛酸及其鹽類 (PFOA and its salts) (CAS No.: 335-67-1 and its salts)	15968: 2010, analysis was performed by LC/MS/MS.)	mg/kg	0.01	n.d.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com.tw/terms-of-service. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 5 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

測試項目 (Test Items)	測試方法 (Method)	單位 (Unit)	MDL	結果 (Result)
(Test items)	(Method)	(Onit)	Å	No.1
銻 (Sb) (Antimony (Sb)) (CAS No.: 7440-36-0)	參考US EPA 3052: 1996·以感應耦合電漿發	mg/kg	2	n.d.
鈹 (Be) (Beryllium (Be)) (CAS No.: 7440-41-7)	射光譜儀分析。(With reference to US EPA 3052: 1996, analysis was performed by	mg/kg	2	n.d.
砷 (As) (Arsenic (As)) (CAS No.: 7440-38-2)	ICP-OES.)	mg/kg	2	n.d.
聚氯乙烯 (Polyvinyl chloride) (PVC)	參考ASTM E1252: 2021 · 以傅立葉轉換紅外線光譜儀及焰色法分析。(With reference to ASTM E1252: 2021, analysis was performed by FT-IR and Flame Test.)	**	<u>u</u> n	Negative

備註(Note):

- 1. mg/kg = ppm; 0.1wt% = 0.1% = 1000ppm
- 2. MDL = Method Detection Limit (方法偵測極限值)
- 3. n.d. = Not Detected (未檢出); 小於MDL / Less than MDL
- 4. "-" = Not Regulated (無規格值)
- 5. ** = Qualitative analysis (No Unit) 定性分析(無單位)
- 6. Negative = Undetectable 陰性(未偵測到); Positive = Detectable 陽性(已偵測到)
- 7. 樣品的測試是基於申請人要求混合測試,報告中的混合測試結果不代表其中個別單一材質的含量。
 The sample(s) was/were analyzed on behalf of the applicant as mixing sample in one testing. The above result(s) was/were only given as the informality value.



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 6 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國、江蘇省、宿遷市、泗洪縣、經濟開發區杭州路南側、建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD、ECONOMIC DEVELOPMENT ZONE、SIHONG COUNTY、SUQIANCITY、JIANGSU PROVINCE、P,R、CHINA)

PFAS Remark:

現有PFAS定量技術是分析PFAS物質的特定結構,但同碳數族群之PFAS酸及鹽類物質,其可被辨識的特定結構相同,因此無法區別所分析的特定結構是來自酸或者鹽類,故測試結果為同碳數族群之PFAS之酸及鹽類物質的濃度總合。下表PFAS物質濃度皆已包含在測試結果中,相關資訊請參見下表:(下表列舉PFAS物質僅為範例,並不包含所有同碳數族群之PFAS鹽類。)

(The quantitative technology of PFAS is to analyze the specific structure of PFAS substances. However, PFAS acid and its salts with the same carbon number group have the same specific structure that can be identified. The tested results of the analyzed specific structure cannot be distinguished to identify the contribution from PFAS acid or its salts. Therefore, the tested results display the sum of concentrations of PFAS acids and its salts with the same carbon number group. The concentration of PFAS substances in the below table have been included in the tested results, please refer to the table for relevant information: (The listed PFAS substances are examples only, it do not include all PFAS salts with the same carbon number group.))

物質濃度分類 (Classification of Substance Concentration)	物質名稱 (Substance Name)	CAS No.
全氟辛烷磺酸及其鹽類 Perfluorooctane sulfonates and its	全氟辛基磺酸鉀 (PFOS-K) Potassium perfluorooctanesulfonate (PFOS-K)	2795-39-3
salts (PFOS and its salts) (CAS No.: 1763-23-1 and its salts)	全氟辛基磺酸鋰 (PFOS-Li) Perfluorooctanesulfonic acid, lithium salt (PFOS-Li)	29457-72-5
	全氟辛基磺酸銨 (PFOS-NH ₄) Perfluorooctanesulfonic acid, ammonium salt (PFOS-NH ₄)	29081-56-9
	全氟辛基磺酸二乙醇銨 (PFOS-NH(OH) ₂) Perfluorooctane sulfonate diethanolamine salt (PFOS-NH(OH) ₂)	70225-14-8
	全氟辛基磺酸四乙基銨 (PFOS-N(C_2H_5) ₄) Perfluorooctanesulfonic acid,tetraethylammonium salt (PFOS-N(C_2H_5) ₄)	56773-42-3
	全氟辛基磺酸二癸二甲基銨 (PFOS-DDA) N-decyl-N,N-dimethyldecan-1-aminium 1,1,2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-heptadecafluorooctane-1-sulfonate (PFOS-DDA)	251099-16-8



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 7 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

物質濃度分類 (Classification of Substance Concentration)	物質名稱 (Substance Name)	CAS No.
全氟辛烷磺酸及其鹽類 Perfluorooctane sulfonates and its	全氟辛基磺醯氟 (POSF) Perfluorooctane sulfonyl fluoride (POSF)	307-35-7
salts (PFOS and its salts) (CAS No.: 1763-23-1 and its salts)	全氟辛基磺酸鎂 (PFOS-Mg) Perfluorooctanesulfonic acid, magnesium salt (PFOS-Mg)	91036-71-4
	全氟辛基磺酸鈉 (PFOS-Na) Perfluorooctanesulfonic acid, sodium salt (PFOS-Na)	4021-47-0
全氟辛酸及其鹽類 Perfluorooctanoic acid and its salts	全氟辛酸鈉 (PFOA-Na) Sodium perfluorooctanoate (PFOA-Na)	335-95-5
(PFOA and its salts) (CAS No.: 335-67-1 and its salts)	全氟辛酸鉀 (PFOA-K) Potassium perfluorooctanoate (PFOA-K)	2395-00-8
	全氟辛酸銀 (PFOA-Ag) Silver perfluorooctanote (PFOA-Ag)	335-93-3
	全氟辛氟 (PFOA-F) Perfluorooctanoyl fluoride (PFOA-F)	335-66-0
	全氟辛酸銨 (APFO) Ammonium pentadecafluorooctanoate (APFO)	3825-26-1
	全氟辛酸鋰 (PFOA-Li) Lithium perfluorooctanoate (PFOA-Li)	17125-58-5



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 8 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)


江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

重金屬流程圖 / Analytical flow chart of heavy metal

根據以下的流程圖之條件,樣品已完全溶解。(六價鉻測試方法除外)

These samples were dissolved totally by pre-conditioning method according to below flow chart. (Cr^{6+} test method excluded)

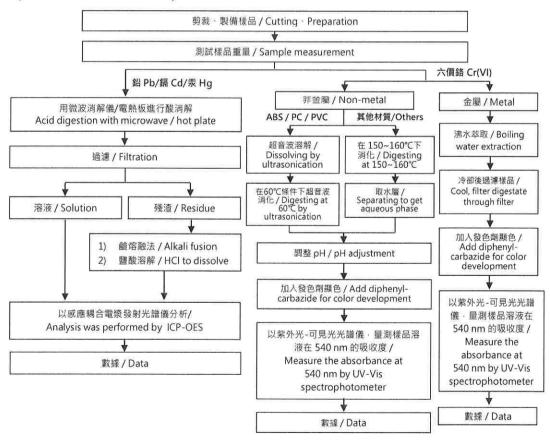



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 9 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)


慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國,江蘇省、宿遷市、泗洪縣、經濟開發區杭州路南側、建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD、ECONOMIC DEVELOPMENT ZONE、SIHONG COUNTY、SUQIANCITY、JIANGSU PROVINCE、P,R、CHINA)

多溴聯苯/多溴聯苯醚分析流程圖 / Analytical flow chart - PBBs/PBDEs

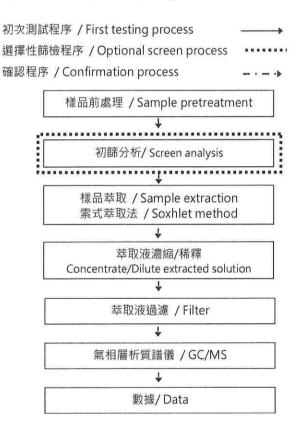



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 10 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)


桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

可塑劑分析流程圖 / Analytical flow chart - Phthalate

【測試方法/Test method: IEC 62321-8】





Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 11 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)


慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國、江蘇省、宿遷市、泗洪縣、經濟開發區杭州路南側、建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD、ECONOMIC DEVELOPMENT ZONE、SIHONG COUNTY、SUQIANCITY、JIANGSU PROVINCE、P,R、CHINA)

六溴環十二烷分析流程圖 / Analytical flow chart - HBCDD

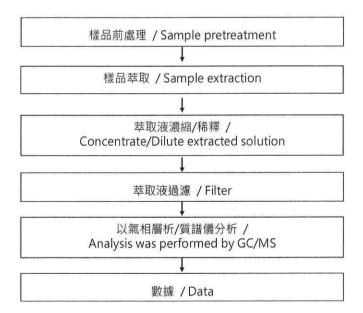

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com.tw/terms-of-service. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from unauthorized alteration, forgery or falsification of the company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 12 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)


慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

鹵素分析流程圖 / Analytical flow chart - Halogen





Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 13 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)


慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD,ECONOMIC DEVELOPMENT ZONE,SIHONG COUNTY,SUQIANCITY,JIANGSU PROVINCE,P,R,CHINA)

全氟化合物(包含全氟辛酸/全氟辛烷磺酸/其相關化合物等等)分析流程圖 / Analytical flow chart – PFAS (including PFOA/PFOS/its related compound, etc.)

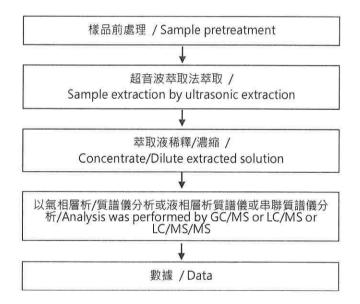



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 14 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)


中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

元素(含重金屬)分析流程圖 / Analytical flow chart of elements (Heavy metal included)

根據以下的流程圖之條件,樣品已完全溶解。

These samples were dissolved totally by pre-conditioning method according to below flow chart.

【參考方法/Reference method: US EPA 3051A、US EPA 3052】

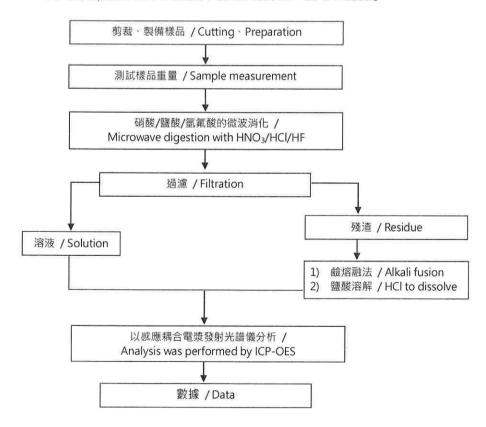

* US EPA 3051A 方法未添加氫氟酸 / US EPA 3051A method does not add HF.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com.tw/terms-of-service. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 15 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)


慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

聚氯乙烯物質判定分析流程圖 / Analysis flow chart - PVC





Test Report

號碼(No.): ETR23B04850

日期(Date): 05-Dec-2023

頁數(Page): 16 of 16

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO., LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)


桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)


中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

* 照片中如有箭頭標示,則表示為實際檢測之樣品/部位. * (The tested sample / part is marked by an arrow if it's shown on the photo.)

ETR23B04850



ETR23B04850



** 報告結尾 (End of Report) **

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com.tw/terms-of-service and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at https://www.sgs.com.tw/terms-of-service. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ferrite Beads category:

Click to view products by Tai-Tech manufacturer:

Other Similar products are found below:

CZB1JGTTD152P CZB2AFTTD800P CZB2AGTTD121P PE-0402FB121ST AB 3X2X3SM DER0705-2.2 NCB0603R301TR050F
NCB0805A320TR050F NCB-H1206B680TR300F CZB1JGTTD221P CZB1JGTTD600P CZB2AGTTD301P CZB2BFTTE301P
CZB2BFTTE601P 4221R-1 EMI0805R-600 SBY100505T-100Y-N NCB-GH0402D121TR060F NCB0402P301TR005F
NCB0603R152TR030F NCB0805A121TR050F NCB0805A301TR070F NCB3312K900TR500F NCB-H0805A221TR300F
NCB0402P221TR030F NCB0805A102TR040F NCB1806E151TR020F NCB-H0402P100TR200F NCB-H0603R121TR300F NCB-H0805A220TR600F NCB-H1206B601TR200F CZB1JGTTD202P CBH160808W221T WLBD1005HCU330TL WLBD2012HCU121TH
WLBD2012HCU221TH WQBD1608HCU121TH WLBD1608K2U252TB VLU0810-102KBC12 WLBD1608K2U800TP BMB2A0080AN4
SZ1608F470TF FBSHC0805-331-302R HFJ100505T-601Y-N HFY100505T-221Y-N PBY201209T-110Y-N SBY060303T-121Y-N
BBPY00160808301Y00 SBY100505T-750Y-N BBPY00100505102Y00