



**High Power Current Sensing Resistors RLP Series  
( Halogen-Free )  
AEC-Q 200-Ver D qualified**

|             |               |
|-------------|---------------|
| Document No | TRLP-250S008H |
| Issued date | 2021/09/28    |
| page        | 1/6           |

**1. Scope :**


This specification applied to the products of current sensing resistor of metal foil for Lead-Free RLP series manufactured by TA-I TECHNOLOGY CO.,LTD.

**2. Type Designation :**


| <u>RLP</u><br>Item | <u>25</u><br>Series No. | <u>F</u><br>Resistance tolerance | <u>E</u><br>Packaging | <u>C</u><br>Power rating       | <u>R010</u><br>Resistance                     |
|--------------------|-------------------------|----------------------------------|-----------------------|--------------------------------|---|
|                    | 25:2512<br>(6432)       | F:±1%<br>G:±2%<br>J:±5%          | E: Embossed Tape      | C=1W<br>D=1.5W<br>E=2W<br>G=3W | e.g.<br>R010=10mΩ<br>R100=100mΩ<br>R500=500mΩ |

**3. Construction and Dimension :**

**3.1 Construction:**

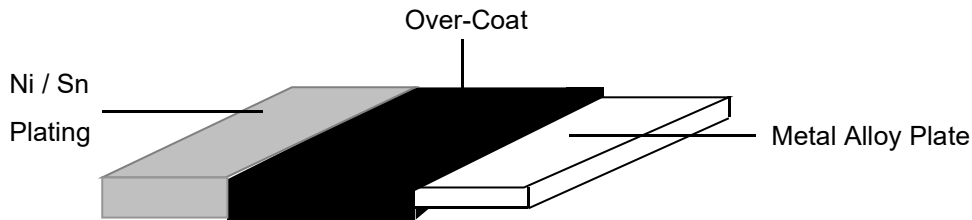

**3.2 Dimension:**

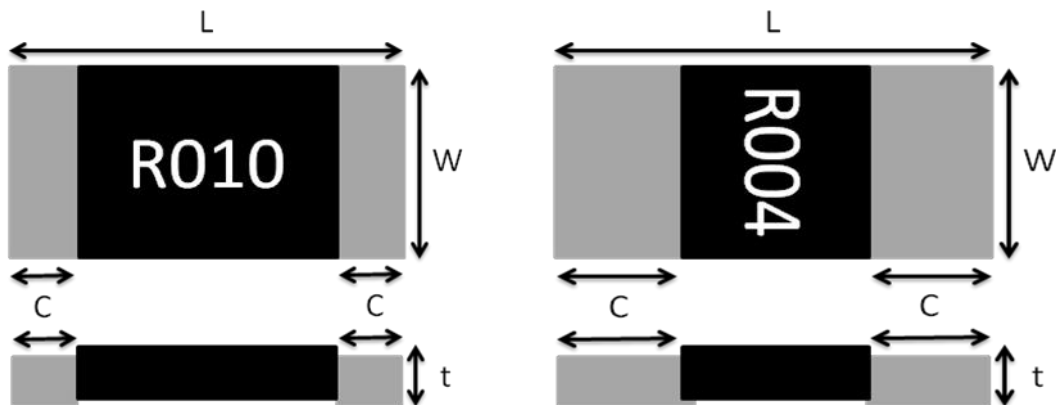

Unit : mm

| Style | L       | W       | C              | T*        | Material   |
|-------|---------|---------|----------------|-----------|--|
| RLP25 | 6.4±0.2 | 3.2±0.2 | 2.2±0.2(≤4mΩ)  | 0.9 ±0.20 | Strip : Alloy<br>Over Coating : Polymer<br>Compound UL-94V-0 grade |
|       |         |         | 0.9±0.2(R>4mΩ) |           |  |



**High Power Current Sensing Resistors RLP Series  
( Halogen-Free )  
AEC-Q 200-Ver D qualified**

|             |               |
|-------------|---------------|
| Document No | TRLP-250S008H |
| Issued date | 2021/09/28    |
| page        | 2/6           |

**4. Features:**

|                                       |   |
|---------------------------------------|---|
| Type                                  | RLP25   |
| Power Rating                          | 1 mΩ < R ≤ 100mΩ (1W、1.5 W、2 W、3W)<br>100 mΩ < R ≤ 500mΩ (1W、1.5 W、2 W) |
| Resistance Value                      | 1mΩ < R ≤ 500mΩ   |
| Operation Temperature Range           | -55°C ~ +170°C  |
| Temperature Coefficient of Resistance | ±50ppm/°C   |
| Tolerance                             | ±1%, ±2%, ±5%   |
| Insulation Resistance                 | 100 Meg Ohms Minimum  |
| Maximum Working Current (A)           | (P/R) <sup>1/2</sup>  |

Note: 2&3watts total Solder pad and trace size of 300mm


Thickness does not include protective layer

**5. Reliability Tests :**

| Test Items                            | Reference              | Condition of Test  | Test Limits |
|---------------------------------------|------------------------|--|-------------|
| Temperature Coefficient of Resistance | IEC60115-1 4.8         | +25 ~ 125°C  | Refer 4.0   |
| High Temperature Exposure(Storage)    | MIL-STD-202 Method 108 | T=125°C,1000hrs,Measurement at 24hrs after test conclusion.                              | < ±1%       |
| Low temperature operation             | IEC60115-1 4.23.4      | -55 °C for 45 min  | < ±0.5%     |
| Temperature Cycling                   | JESD22 Method JA-104   | 1000Cycle (-55°C to 125 °C),Measurement at 24hrs after test conclusion.                  | < ±0.5%     |
| Short time overload                   | IEC60115-1 4.13        | 5 X rated power for 5s   | < ±0.5%     |
| Biased Humidity                       | MIL-STD-202 Method 103 | 10% Rated voltage at 85 °C, RH:85% ,1000Hrs, Measurement at 24hrs after test conclusion. | < ±0.5%     |
| Operation life                        | MIL-STD-202 Method 108 | 1000 h at +70 °C, 1.5 h "ON", 0.5 h "OFF"  | < ±1%       |
| Resistance to Soldering Heat          | IEC60115-1 4.18        | T=260+/-5°C solder,10+/-1 sec dwell  | < ±0.5%     |
| Mechanical Shock                      | MIL-STD-202 Method 213 | 100g's , Normal duration is 6ms , half sine shock pulse                                  | < ±0.5%     |
| Resistance to vibration               | MIL-STD-202 Method 204 | 5g's for 20min.12cycles, 10-2000Hz   | <±0.5%      |
| Board Flex                            | AEC-Q200-005           | Min 2mm deflection ,60sec.   | < ±0.5%     |
| Flammability                          | UL-94                  | V-0 or V-1are acceptable, Electrical test not required                                   |             |



### 5.1 Derating Curve

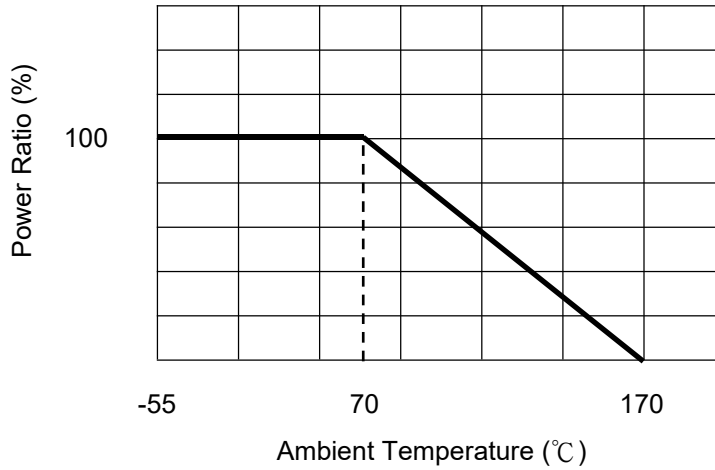

### 5.2 Rated Current

The rated current is calculated by the following Formula:


$$I = \sqrt{P/R}$$

I : Rated Current (A)

P : Rated Power (W)

R : Resistance Value ( $\Omega$ )

### 6. Recommended Solder Pad Dimension

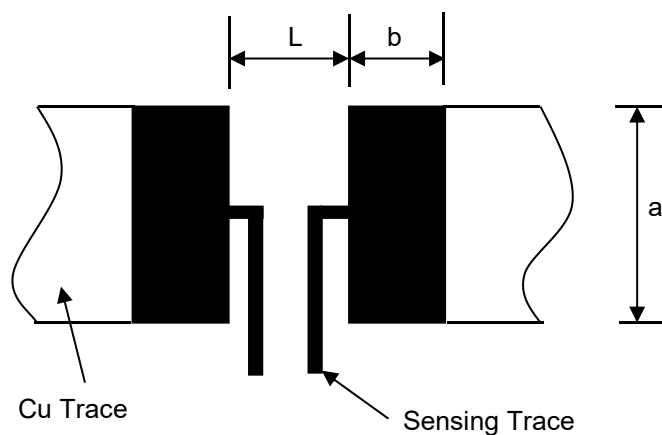

| Resistance Range ( $\Omega$ ) | a   | b   | L   |
|-------------------------------|-----|-----|-----|
| $R > 0.004$                   | 4.0 | 2.1 | 4.1 |
| $R \leq 0.004$                | 4.0 | 3.1 | 1.3 |

Unit: mm




High Power Current Sensing Resistors RLP Series  
( Halogen-Free )  
AEC-Q 200-Ver D qualified

|             |               |
|-------------|---------------|
| Document No | TRLP-250S008H |
| Issued date | 2021/09/28    |
| page        | 4/6           |


7. Number of Package:

4000 Pieces / package

8. Label:

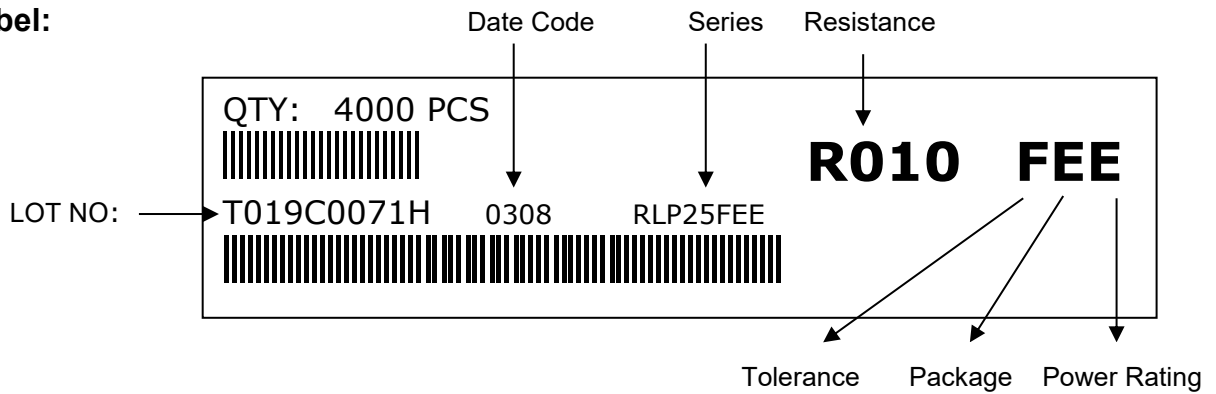

9. Taping

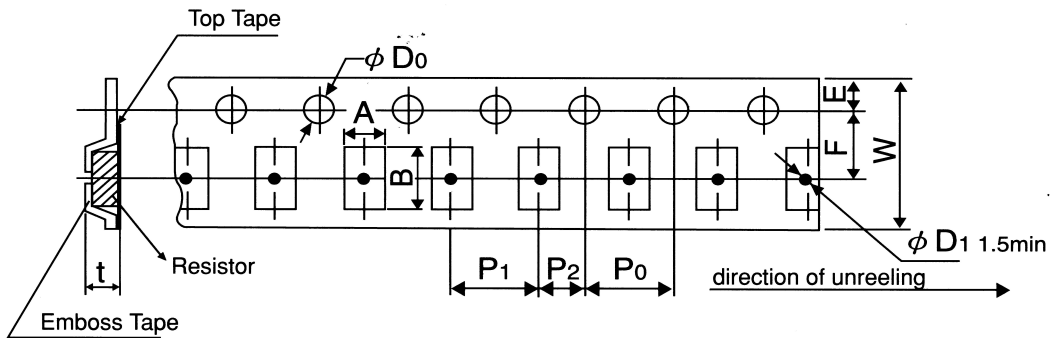



| Packing | Type  | A       | B       | W       | F        | E        | P <sub>1</sub> | P <sub>2</sub> | P <sub>0</sub> | D <sub>0</sub>     | t        |
|---------|-------|---------|---------|---------|----------|----------|----------------|----------------|----------------|--------------------|----------|
| Emboss  | RLP25 | 3.6±0.2 | 6.9±0.2 | 12.±0.2 | 5.5±0.05 | 1.75±0.1 | 4.0±0.1        | 2.0±0.05       | 4.0±0.05       | φ 1.5<br>(+0.1/-0) | 1.2±0.15 |



High Power Current Sensing Resistors RLP Series  
( Halogen-Free )  
AEC-Q 200-Ver D qualified

|             |               |
|-------------|---------------|
| Document No | TRLP-250S008H |
| Issued date | 2021/09/28    |
| page        | 5/6           |


### 10. Reel Specification

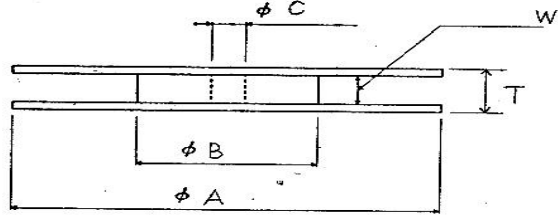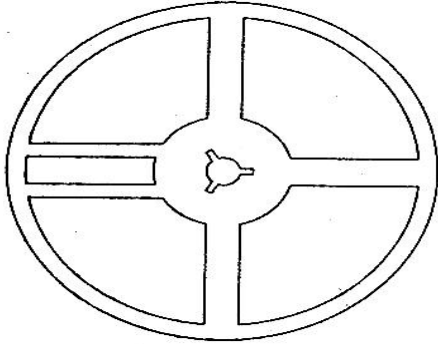

| Series | $\phi A$                        | $\phi B$ | $\phi C$ | W        | T        |
|--------|---------------------------------|----------|----------|----------|----------|
| RLP 25 | 180 <sup>+0</sup> <sub>-3</sub> | 60 ±1.0  | 13.0±1.0 | 13.0±1.0 | 15.4±2.0 |

### 11. Peeling Strength of Top Cover Tape

Test Condition: 0.1 to 0.7 N at a peel-off speed of 300 mm / min.

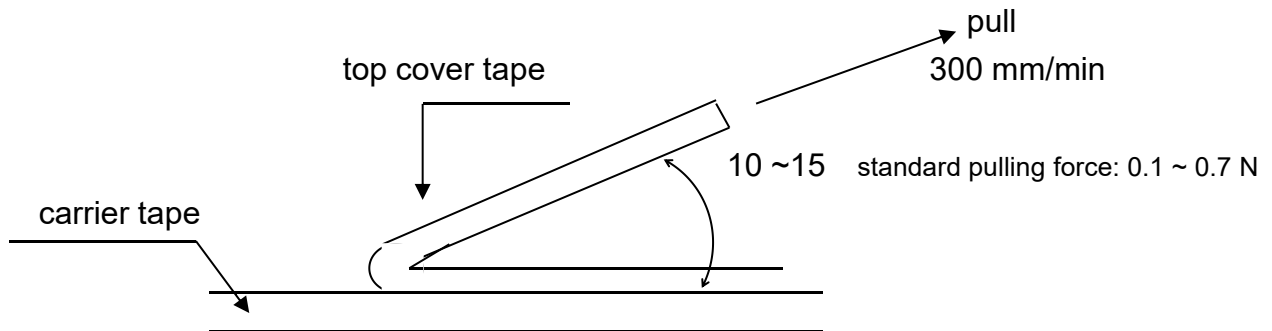

### 12. Storage Conditions:

Temperature: 5°C~35°C, Humidity: 40%~75%

### 13. Shelf Life:


2 years from manufacturing date.



**High Power Current Sensing Resistors RLP Series  
( Halogen-Free )  
AEC-Q 200-Ver D qualified**

|             |               |
|-------------|---------------|
| Document No | TRLP-250S008H |
| Issued date | 2021/09/28    |
| page        | 6/6           |

**14. Recommend IR – Reflow profile: (solder: Sn96.5 / Ag3 / Cu0.5)**

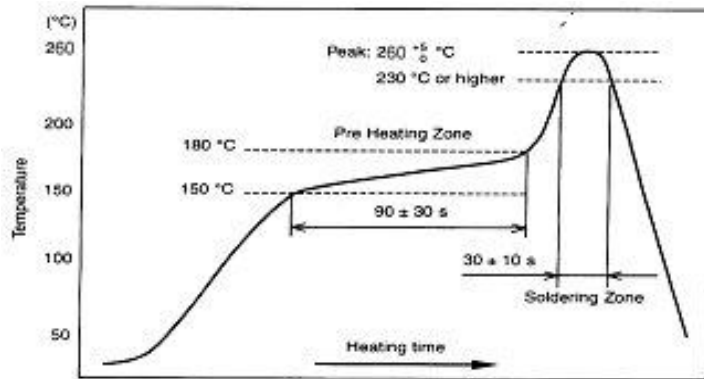

**Peak :  $260 \pm 5^{\circ}\text{C}$  , 5 sec**  
 $-0$

**Pre – heat zone : 150 to 180 °C , 90±30 sec**

**Soldering zone : 230°C or higher , 30±10 sec**

**Iron Solder:  $350 \pm 10^{\circ}\text{C}$  , 3+1/-0 sec**

**15. ECN**

Engineering Change Notice: The customer will be informed with ECN if there is significant modification on the characteristics and materials described in approval sheet.

**16. Manufacturing Country & City :**

TA-I TECHNOLOGY CO., LTD. ( Taiwan– Tao Yuan )

Tel : (+886) 3-3246169 Fax : (+886) 3-3246167

**Associated companies :**

(1)TA-I TECHNOLOGY ( SU ZHOU ) CO., LTD. ( China – Su Zhou)

Tel :(+86) 512-63457879 Fax : (+86) 512-63457869

(2) TA-I TECHNOLOGY ELECTRONIC (DONGGUAN ) CO., LTD. ( China –Dongguan )

Tel : (+86) 769-8339-4790~3 Fax : (+86) 769-8339-4794

(3) FORTUNE TASK RESISTOR FACTORY ( China – Dongguan )

Tel : (+86) 769-8339-4790~3 Fax : (+86) 769-8339-4794

(4) TAI OHM ELECTRONICS ( M ) SDN. BHD. ( Malaysia – Penang )

Tel :(+60) 4- 3900480 Fax : (+60) 4-3901481

(5) P.T.TAI ELECTRONIC Indonesia ( Indonesia – Jakarta )

Tel :(+62) 21-44820254 Fax : (+62) 21-44820256

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Thick Film Resistors - SMD category](#):*

*Click to view products by [TA-I Tech manufacturer](#):*

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--19K6](#) [CR-05FL7--243R](#) [CR-05FL7--40K2](#) [CR-05FL7--698K](#) [CR-12FP4--324R](#) [CR-12JP4--680R](#)  
[M55342K06B1E78RS3](#) [M55342K06B6E19RWL](#) [M55342K06B6E81RS3](#) [M55342M05B200DRWB](#) [M55342M06B4K70MS3](#) [MC0603-511-](#)  
[JTW](#) [742C083750JTR](#) [MCR01MZPF1202](#) [MCR01MZPF1601](#) [MCR01MZPF1800](#) [MCR01MZPF6201](#) [MCR01MZPF9102](#) [MCR01MZPJ113](#)  
[MCR01MZPJ121](#) [MCR01MZPJ125](#) [MCR01MZPJ751](#) [MCR03EZHJ103](#) [MCR03EZPFX2004](#) [MCR03EZPJ270](#) [MCR03EZPJ821](#)  
[MCR10EZPF1102](#) [MCR18EZPJ330](#) [RC0603F1473CS](#) [RC0603F150CS](#) [RC1005F1152CS](#) [RC1005F1182CS](#) [RC1005F1372CS](#)  
[RC1005F183CS](#) [RC1005F1911CS](#) [RC1005F1912CS](#) [RC1005F203CS](#) [RC1005F2052CS](#) [RC1005F241CS](#) [RC1005F2431CS](#)  
[RC1005F3011CS](#) [RC1005F303CS](#) [RC1005F4321CS](#) [RC1005F4642CS](#) [RC1005F471CS](#) [RC1005F4751CS](#) [RC1005F5621CS](#)  
[RC1005F6041CS](#) [RC1005J106CS](#)