

OT-M Type


7.0 x 5.0 mm SMD LVPECL/LVDS Crystal Oscillator

FEATURE

- Typical 7.0 x 5.0 x 1.45 hermetically sealed ceramic package
- Very low phase jitter : 0.6 ps, typ. RMS
- Any frequency between 10 MHz and 1500 MHz.
- Tri-state enable/disable
- Fast deliver


TYPICAL APPLICATION

- High-Speed Gigabit Ethernet, Fiber Channel, Storage Area Network, SONET
- Enterprise Server, SAS/SATA
- Microprocessors/DSP/FPGA
- Broadband Access
- Smart Grid




RoHS Compliant

DIMENSION (mm)

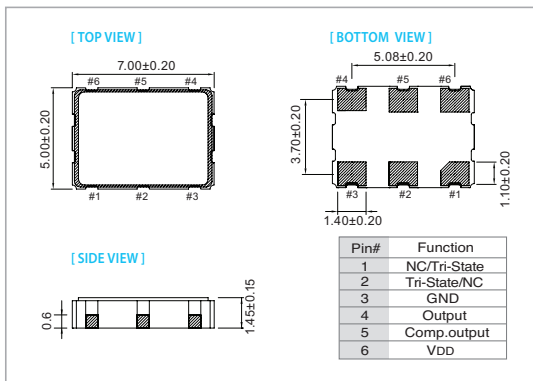

SOLDER PAD LAYOUT (mm)

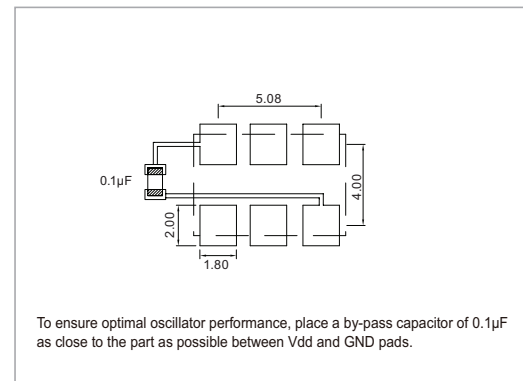

ELECTRICAL SPECIFICATION

Parameter	LVPECL				LVDS				unit
	3.3 V		2.5 V		3.3 V		2.5 V		
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
Supply Voltage Variation (V_{DD})	VDD-5%	VDD+5%	VDD-5%	VDD+5%	VDD-5%	VDD+5%	VDD-5%	VDD+5%	V
Frequency Range	10	1500	10	1500	10	1500	10	1500	MHz
Standard Frequency	106.25, 125, 133.33, 150, 155.52, 156.25, 187.5, 212.5, 312.5, 622.08								
Supply Current 10 MHz ≤ Fo ≤ 1500 MHz	-	50	-	50	-	50	-	50	mA
Output Level	2.275	-	1.475	-	-	1.6	-	1.6	V
Output High	-	1.68	-	0.88	0.9	-	0.9	-	
Output Low	-	-	-	-	-	-	-	-	
Transition Time: Rise/Fall Time⁺	-	1.0	-	1.0	-	1.0	-	1.0	nSec
Start Time	-	10	-	10	-	10	-	10	mSec
Tri-State(Input to Pin 2 or Pin 1)									
Enable (High voltage or floating)	2.31	-	1.75	-	2.31	-	1.75	-	V
Disable (Low voltage or GND)	-	0.99	-	0.75	-	0.99	-	0.75	
RMS Phase Jitter (Integrated 12 KHz ~ 20 MHz) (At Integer Mode)	-	1.2	-	1.2	-	1.2	-	1.2	pSec
Phase Noise @ 156.25 MHz	100Hz	-94		-94		-94		-94	dBc/Hz
	1 kHz	-113		-113		-113		-112	
	10 kHz	-122		-122		-122		-122	
Aging (@ 25°C 1st year)	-	±3	-	±3	-	±3	-	±3	ppm
Storage Temp. Range	-55	125	-55	125	-55	125	-55	125	°C

+ Transition times are measured between 20% and 80% of V_{DD}.

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm	
	±25	±50
-10 ~ +60	○	○
-20 ~ +70	○	○
-40 ~ +85	△	○

* ○: Available △: Conditional X: Not available

* Inclusive of calibration @ 25 °C, operating temperature range, input voltage variation, load variation, aging (1st year), shock, and vibration

Note: not all combination of options are available. Other specifications may be available upon request.

Specifications subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [TAITIEN](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#)
[SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-24](#) [F535L-27](#) [PE7744DW-](#)
[100.0M](#) [ASF1-3.686MHZ-N-K-S](#) [ASV-4.000MHZ-LCS-T](#) [XLH735025.000JU4I8](#) [XLP725125.000JU6I8](#) [XO57CTECNA3M6864](#) [601251](#)
[SiT8503AI-18-33E-0.200000X](#) [SIT8918AA-11-33S-16.000000G](#) [SIT9122AI2C233E300.000000X](#) [XO37CTECNA20M](#) [9120AC-2D2-](#)
[33E212.500000](#) [9102AI-243N25E100.000000](#) [8208AC-82-18E-25.000000](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [ASFL1-](#)
[48.000MHZ-LC-T](#) [632L3I004M00000](#) [SIT8920AM-31-33E-25.0000](#) [9121AC-2C3-25E100.000000](#) [9102AI-233N33E100.00000X](#) [9102AI-](#)
[233N25E200.000000](#) [9102AI-232H25S125.000000](#) [9102AI-133N25E200.000000](#) [9102AC-283N25E200.000000](#) [9001AC-33-33E1-30.000](#)
[8103AC-13-33E-12.00000X](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [XUN736000.032768I](#) [EC3925ETTTS-100.000M TR](#) [SIT1602BC-83-](#)
[33E-10.000000Y](#) [8003AI-12-33S-40.00000Y](#) [1602BI-13-33S-19.200000E](#) [8208AI-2F-18E-25.000000X](#)