

## 200mA, 75V Switching SMD Diode

### FEATURES

- Low power loss, high efficiency
- Ideal for automated placement
- High surge current capability
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	200	mA
$V_{RRM}$	75	V
$V_F$ at $I_F=150mA$	1.25	V
$T_J$ Max.	150	°C
Package	SOT-23	
Configuration	Single die	


### APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter



### MECHANICAL DATA

- Case: SOT-23
- Molding compound meets UL 94 V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Weight: 8mg (approximately)

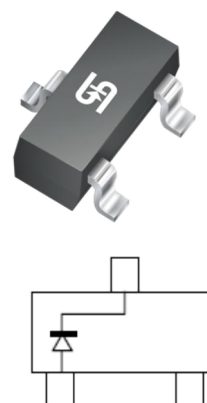

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	BAS116	UNIT
Marking code on the device		JV	
Power dissipation	$P_D$	225	mW
Repetitive peak reverse voltage	$V_{RRM}$	75	V
Mean forward current	$I_O$	200	mA
Non-Repetitive peak forward surge current @ $t=1s$	$I_{FSM}$	500	mA
Thermal resistance (Junction to Ambient)(Note1)	$R_{\theta JA}$	330	°C/W
Junction temperature range	$T_J$	-55 to +150	°C
Storage temperature range	$T_{STG}$	-55 to +150	°C

Note1: Valid provided that electrodes are kept at ambient temperature

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)					
<b>PARAMETER</b>	<b>CONDITIONS</b>	<b>SYMBOL</b>	<b>MIN</b>	<b>MAX</b>	<b>UNIT</b>
Forward voltage	$I_F = 1.0\text{mA}, T_J = 25^\circ\text{C}$	$V_F$	-	0.9	V
	$I_F = 10\text{mA}, T_J = 25^\circ\text{C}$		-	1.0	
	$I_F = 50\text{mA}, T_J = 25^\circ\text{C}$		-	1.1	
	$I_F = 150\text{mA}, T_J = 25^\circ\text{C}$		-	1.25	
Reverse voltage	$I_R = 100\mu\text{A}, T_J = 25^\circ\text{C}$	$V_R$	75	-	V
Reverse current	$V_R = 75\text{V}, T_J = 25^\circ\text{C}$	$I_R$	-	5	nA
	$V_R = 75\text{V}, T_J = 150^\circ\text{C}$		-	80	
Junction capacitance	$f = 1\text{ MHz}, V_R = 0\text{V}$	$C_J$	-	2.0	pF
Reverse recovery time	$I_F = 10\text{mA}, I_R = 10\text{mA}, R_L = 100\Omega, I_{rr} = 1\text{mA}$	$t_{rr}$	-	3.0	$\mu\text{s}$


<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE</b>	<b>PACKAGE</b>	<b>PACKING</b>
BAS116 RF	SOT-23	3K / 7" Reel
BAS116 RFG	SOT-23	3K / 7" Reel

**Note:** "G" means green compound (halogen free)


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Typical Forward Characteristics**

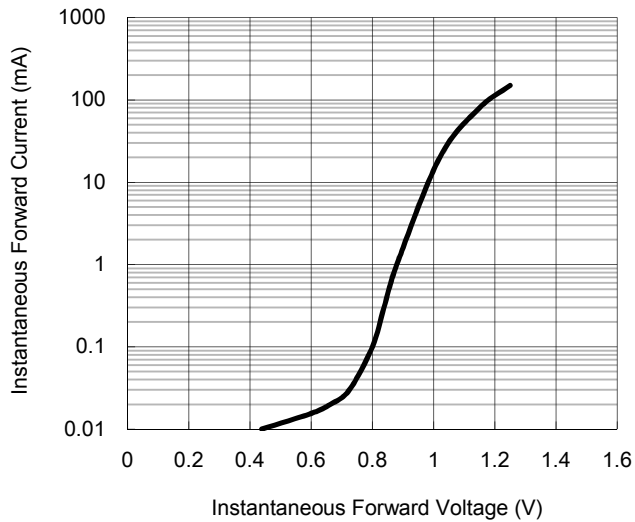


**Fig.2 Reverse Current vs. Reverse Voltage**

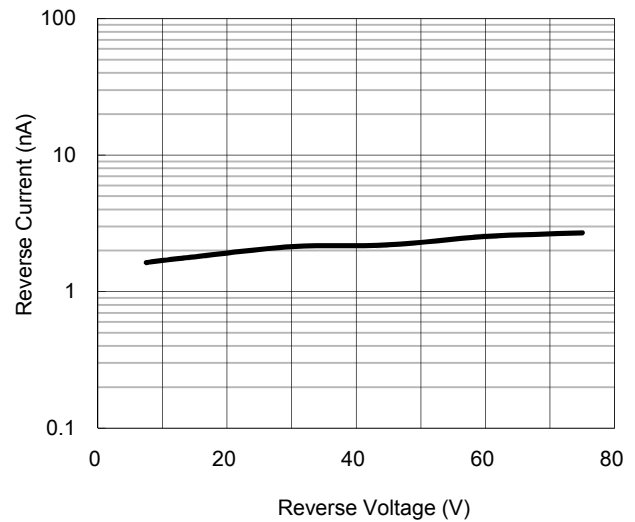

**Fig.3 Admissible Power Dissipation Curve**

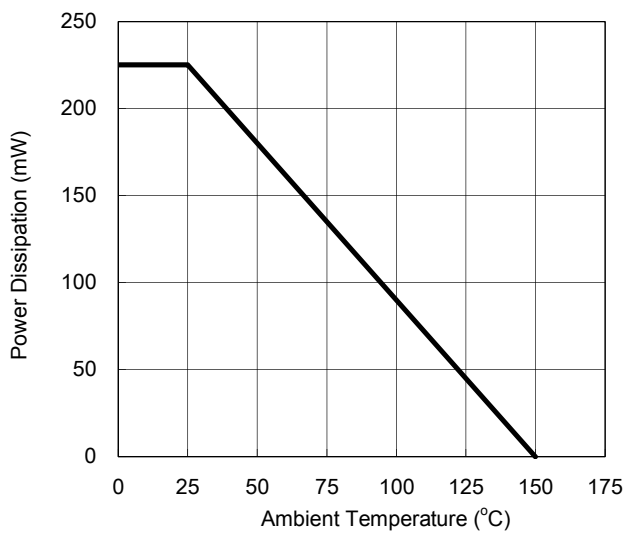


**Fig.4 Typical Junction Capacitance**

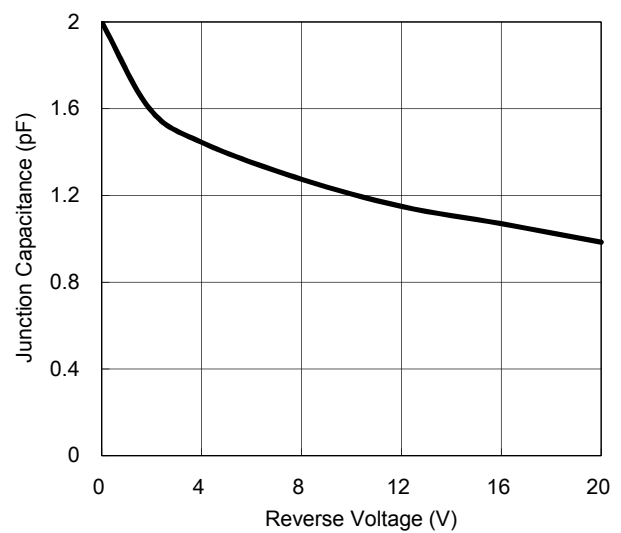


**PACKAGE OUTLINE DIMENSION**

SOT-23

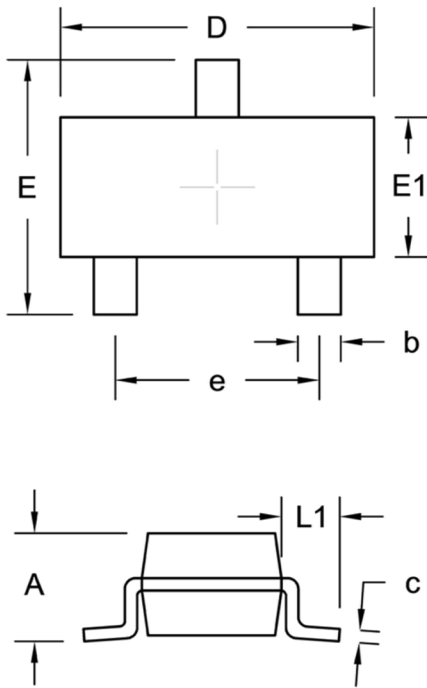

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	0.89	1.12	0.035	0.044
b	0.30	0.50	0.012	0.020
c	0.08	0.20	0.003	0.008
D	2.80	3.04	0.110	0.120
E	2.10	2.64	0.083	0.104
E1	1.20	1.40	0.047	0.055
e	1.90 BSC		0.075 BSC	
L1	0.54 REF.		0.021 REF.	

**SUGGESTED PAD LAYOUT**

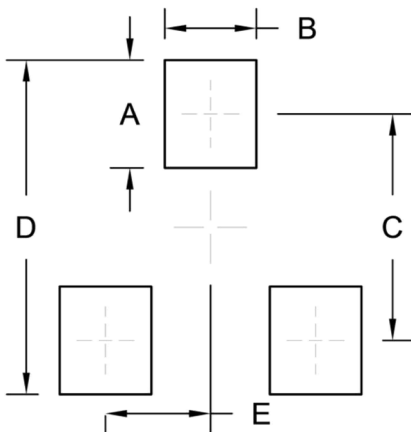

Symbol	Unit (mm)	Unit (inch)
A	1.00	0.039
B	0.85	0.033
C	2.10	0.083
D	3.10	0.122
E	0.98	0.039

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Diodes - General Purpose, Power, Switching category:](#)

*Click to view products by* [Taiwan Semiconductor manufacturer:](#)

Other Similar products are found below :

[RD0306T-H](#) [BAQ33-GS18](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE525](#) [NTE571](#) [NTE574](#) [NTE5804](#) [NTE5806](#) [NTE6244](#)  
[1SS181-TP](#) [1SS193,LF](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#)  
[1N914BTR](#) [RFUH20TB3S](#) [BAS 28 E6327](#) [BAV199-TP](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#)  
[JAN1N3600](#) [LL4151-GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [SP000010217](#) [ACDSW4448-HF](#) [CDSZC01100-HF](#)  
[BAV199E6433HTMA1](#) [BAV70M3T5G](#) [SMBT2001T1G](#) [NTE5801](#) [NTE5800](#) [NTE5808](#) [NTE6240](#) [NTE6248](#) [DLM10C-AT1](#) [BAS28-7](#)