


BZX79B2V4 – BZX79B75

500 mW Hermetically Sealed Glass Zener Voltage Regulators

DO-35

Features

- ✧ Zener voltage range 2.0 to 75 volts
- ✧ DO-35 package (JEDEC)
- ✧ Through-hole device type mounting
- ✧ Hermetically sealed glass
- ✧ Compression bonded construction
- ✧ All external surfaces are corrosion resistant and leads are readily solderable
- ✧ RoHS compliant
- ✧ Solder hot(dip Tin(Sn) lead finish
- ✧ Cathode indicated by polarity band

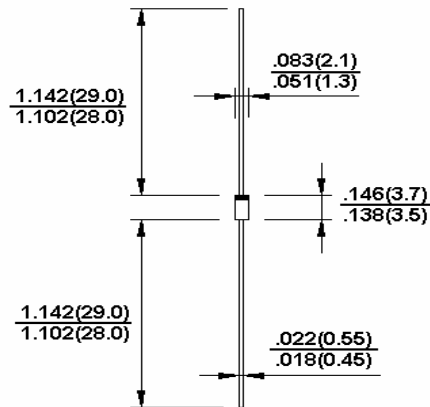

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Type Number	Symbol	Value	Units
Power Dissipation	P _d	500	mW
Maximum Forward Voltage @ I _F =100mA	V _F	1.5	V
Storage Temperature Range	T _{STG}	-65 to + 200	°C
Operating Junction Temperature	T _J	+ 200	°C

These rating are limiting values above which the serviceability of the diode may be impaired.

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Type Number	V _Z @ I _{ZT} (Volts)		I _{ZT} mA	Z _{ZT} @ I _{ZT} Ohms Max	I _{ZK} mA	Z _{ZK} @ I _{ZK} Ohms	I _R @ V _R uA Max	V _R V
	V _Z Min (V)	V _Z Max (V)						
	BZX79B2V4	2.35						
BZX79B2V7	2.65	2.75	5	100	1.0	600	75	1.0
BZX79B3V0	2.94	3.06	5	95	1.0	600	50	1.0
BZX79B3V3	3.23	3.37	5	95	1.0	600	25	1.0
BZX79B3V6	3.53	3.67	5	90	1.0	600	15	1.0
BZX79B3V9	3.82	3.98	5	90	1.0	600	10	1.0
BZX79B4V3	4.21	4.39	5	90	1.0	600	5	1.0
BZX79B4V7	4.61	4.79	5	80	1.0	500	3.0	2.0
BZX79B5V1	5.00	5.2	5	60	1.0	480	2.0	2.0
BZX79B5V6	5.49	5.71	5	40	1.0	400	1.0	2.0
BZX79B6V2	6.08	6.32	5	10	1.0	150	3.0	4.0
BZX79B6V8	6.66	6.94	5	15	1.0	80	2.0	4.0
BZX79B7V5	7.35	7.65	5	15	1.0	80	1.0	5.0
BZX79B8V2	8.04	8.36	5	15	1.0	80	0.7	5.0
BZX79B9V1	8.92	9.28	5	15	1.0	100	0.5	6.0
BZX79B10	9.80	10.2	5	20	1.0	150	0.2	7.0
BZX79B11	10.40	11.22	5	20	1.0	150	0.1	8.0
BZX79B12	11.40	12.24	5	25	1.0	150	0.1	8.0
BZX79B13	12.74	13.26	5	30	1.0	170	0.1	8.0
BZX79B15	14.70	15.30	5	30	1.0	200	0.05	10.5
BZX79B16	15.68	16.32	5	40	1.0	200	0.05	11.2
BZX79B18	17.64	18.36	5	45	1.0	225	0.05	12.6
BZX79B20	19.60	20.40	5	55	1.0	225	0.05	14.0
BZX79B22	21.56	22.44	5	55	1.0	250	0.05	15.4
BZX79B24	23.52	24.48	5	70	1.0	250	0.05	16.8
BZX79B27	26.46	27.54	2	80	0.5	300	0.05	18.9
BZX79B30	29.40	30.60	2	80	0.5	300	0.05	21.0
BZX79B33	32.34	33.66	2	80	0.5	325	0.05	23.1
BZX79B36	35.28	36.72	2	90	0.5	350	0.05	25.2
BZX79B39	38.22	39.78	2	130	0.5	350	0.05	27.3
BZX79B43	42.14	43.86	2	150	0.5	375	0.05	30.1
BZX79B47	46.06	47.94	2	170	0.5	375	0.05	32.9
BZX79B51	49.98	52.02	2	180	0.5	400	0.05	35.7
BZX79B56	54.88	57.12	2	200	0.5	425	0.05	39.2
BZX79B62	60.76	63.24	2.5	215	0.5	430	0.05	43.4
BZX79B68	66.64	69.36	2.5	240	0.5	447	0.05	47.6
BZX79B75	73.50	76.50	2.5	255	0.5	470	0.05	52.5

- Notes:
1. Tolerance and voltage designation, the type numbers listed have zener voltage as shown.
 2. Specials available include, nominal zener voltages between the voltages shown and tighter voltage, for detailed information on price, availability and delivery.
 3. Zener voltage (V_Z) measurement, the zener voltage is measured under pulse conditions such that T_J is no more than 2°C above T_A.
 4. Zener impedance (Z_Z) derivation, zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an RMS value equal to 10% of the dc zener current (I_{ZT}) is superimposed to I_{ZT}.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [Taiwan Semiconductor](#) manufacturer:

Other Similar products are found below :

[RKZ13B2KG#P1](#) [DL5234B](#) [EDZTE6113B](#) [1N4682](#) [1N4691](#) [1N4693](#) [1N4732A](#) [1N4733A-TR](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#)
[1N5365B](#) [1N5369B](#) [1N747A](#) [1N959B](#) [1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [NTE149A](#) [NTE5116A](#) [NTE5121A](#) [NTE5147A](#) [NTE5152A](#)
[NTE5155A](#) [NTE5164A](#) [JANS1N4974US](#) [1N4692](#) [1N4700](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#) [1N4737A](#) [1N4745ARL](#) [1N4752A](#)
[1N4752ARL](#) [1N4760ARL](#) [1N5221B](#) [1N5236B](#) [1N5241BTR](#) [1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#)
[3SMAJ5950B-TP](#) [3SMBJ5925B-TP](#)