

Features

- ✧ For surface mounted application
- ✧ Easy pick and place
- ✧ Glass passivated junction chip
- ✧ Low profile package
- ✧ Built-in strain relief
- ✧ Hideal for automated placement
- ✧ Ultrafast recovery time for high efficiency
- ✧ Low forward voltage, low power loss
- ✧ High temperature soldering guaranteed:
260°C/10 seconds on terminals
- ✧ Meet MSL level 1, per J-STD-020D,
lead free maximum peak of 260°C
- ✧ Plastic material used carriers Underwriters
Laboratory Classification 94V-0
- ✧ Epitaxial construction
- ✧ Green compound with suffix "G" on packing
code & prefix "G" on datecode



Mechanical Data

- ✧ Case: SMB/DO-214AA
- ✧ Molding Compound meet UL 94V-0 flammability rating
- ✧ Terminals: Pure tin plated, leads free, solderable
per MIL-STD-750, Method 2026
- ✧ Polarity: Indicated by cathode band
- ✧ Weight: 0.097 grams

Ordering Information (example)

Part No.	Package	Packing	Packing code	Packing code (Green)
MUR105S	SMB	850 / 7" REEL	R5	R5G

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	MUR 105S	MUR 110S	MUR 115S	MUR 120S	MUR 140S	MUR 160S	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	150	200	400	600	V
Maximum RMS Voltage	V_{RMS}	35	70	105	140	280	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	400	600	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	1						A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	40				35		A
Maximum Instantaneous Forward Voltage (Note 1) @ 1.0A @ $T_A=25^{\circ}C$ @ $T_A=150^{\circ}C$	V_F	0.875 0.710				1.25 1.05		V
Maximum DC Reverse Current at Rated DC Blocking Voltage @ $T_A=25^{\circ}C$ @ $T_A=150^{\circ}C$	I_R	2 50				5 150		uA uA
Maximum Reverse Recovery Time (Note 2)	T_{rr}	25				50		ns
Typical Thermal Resistance (Note 4)	$R_{\theta JL}$	17						$^{\circ}C/W$
Operating Temperature Range	T_J	-55 to + 175						$^{\circ}C$
Storage Temperature Range	T_{STG}	-55 to + 175						$^{\circ}C$

Note 1: Pulse Test with PW=300usec, 1% Duty Cycle

Note 2: Reverse Recovery Test Condition: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$

RATINGS AND CHARACTERISTIC CURVES (MUR105S THRU MUR160S)

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

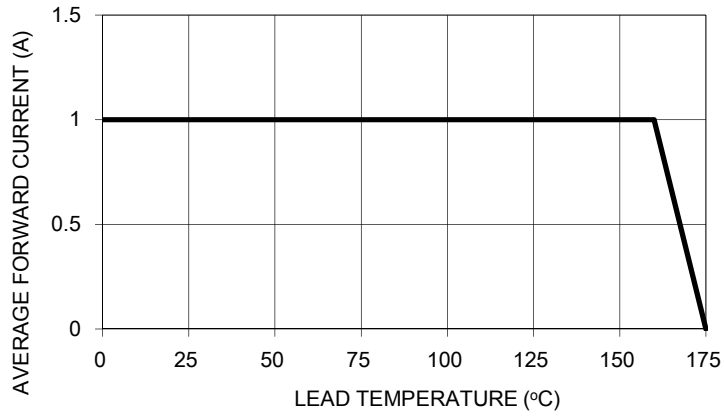


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

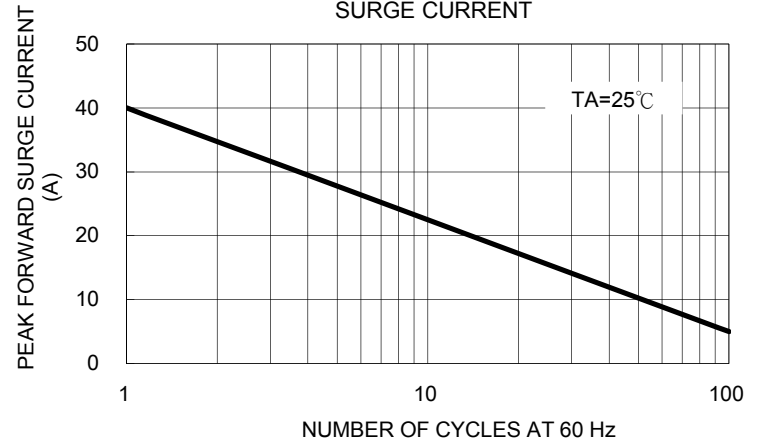


FIG. 3 TYPICAL FORWARD CHARACTERISTICS

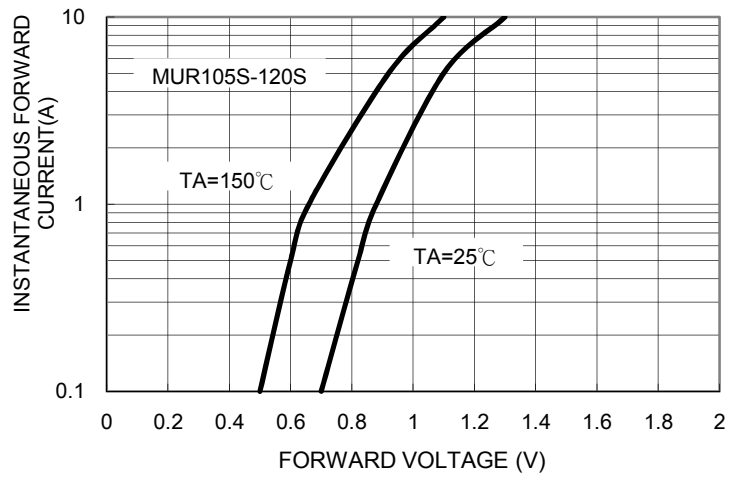


FIG. 4 TYPICAL FORWARD CHARACTERISTICS

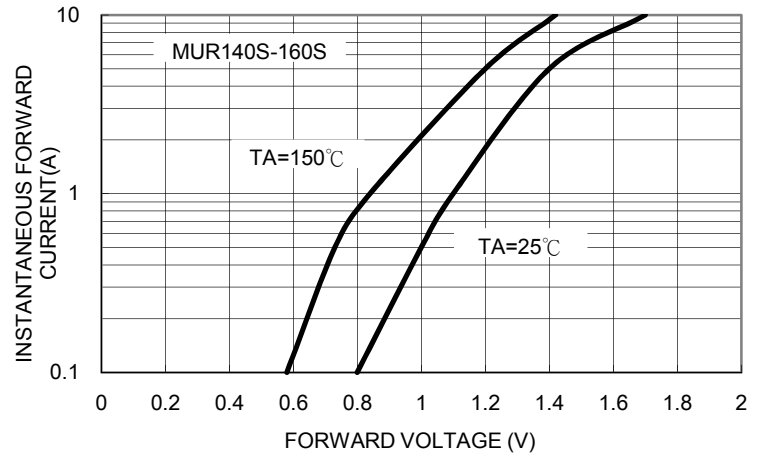


FIG. 5 TYPICAL REVERSE CHARACTERISTICS

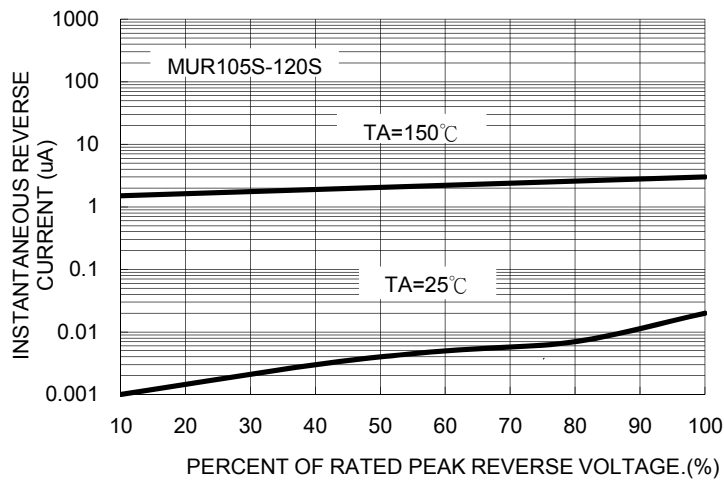


FIG. 6 TYPICAL REVERSE CHARACTERISTICS


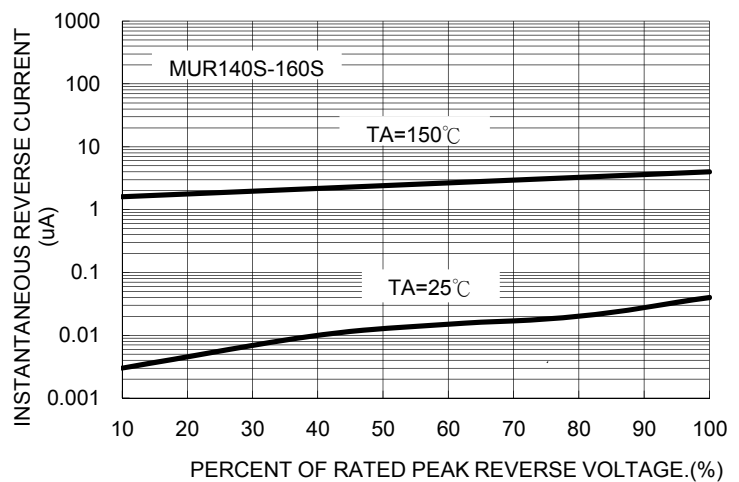


FIG. 7 TYPICAL JUNCTION CAPACITANCE


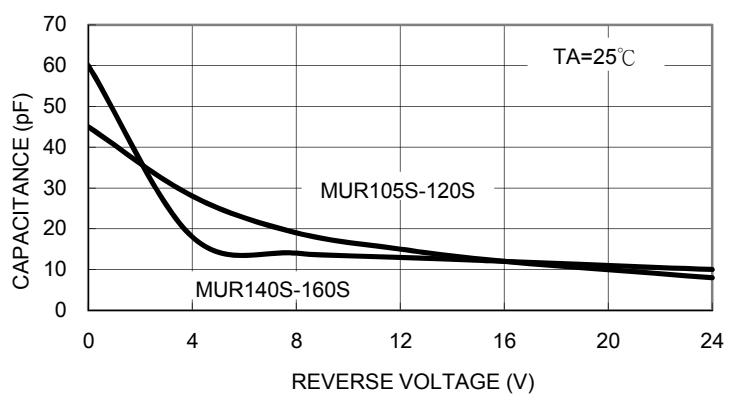


Ordering information

Part No.	Package	Packing	Packing code	Packing code (Green)
MUR1xxS (Note)	SMB	850 / 7" REEL	R5	R5G
	SMB	3K / 13" REEL	R4	R4G
	SMB	3K / 13" Plastic REEL	M4	M4G

Note: "x" is Device Code from "05" thru "60".


Tape & Reel specification

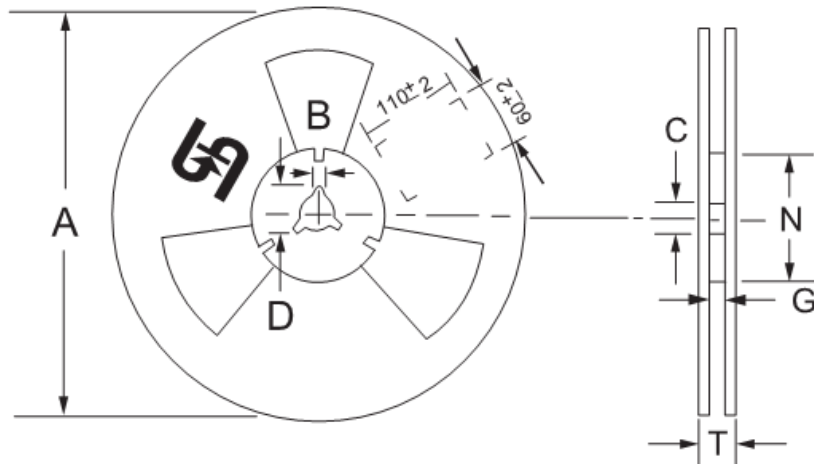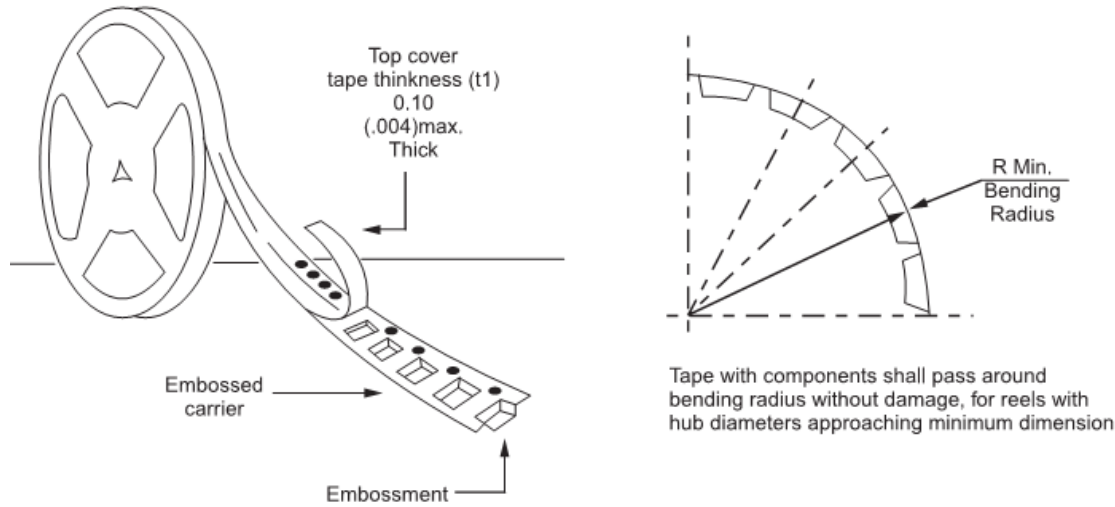

Reel Size	Tape Size	A	B	C	D	N	G	T
		±2.0	±0.4	+0.5;-0.2	min	±1.0	+0.8;-0	max
7"	12mm	178	1.9	13	21	62	12.2	14.6
Reel Size	Tape Size	A	B	C	D	N	G	T
		max	±0.5	±0.5	min	±0.5	+2.0;-0	max
13"	12mm	330	2	13	20.2	75	12.4	18.4


Unit (mm)

Suggested PAD Layout

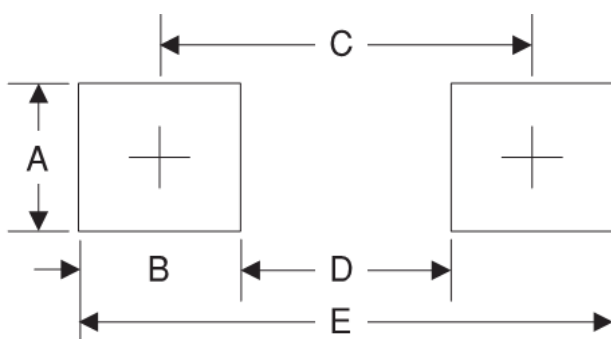

Symbol	Unit(mm)
A	2.3
B	2.5
C	4.3
D	1.8
E	6.7

Dimensions

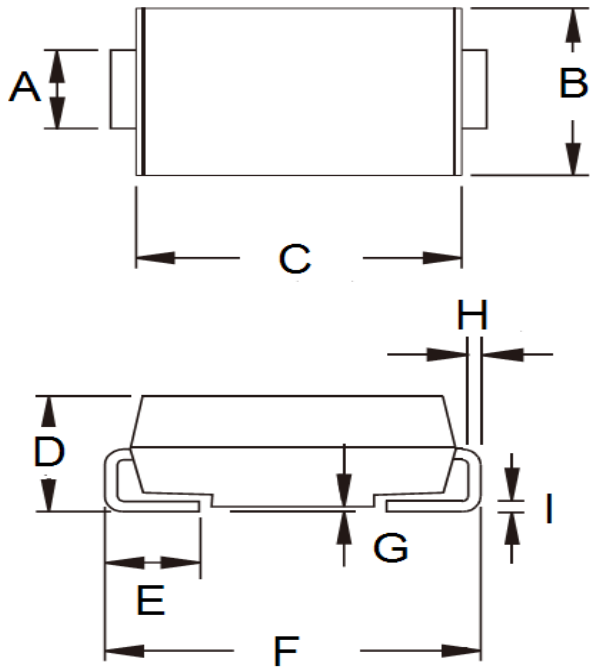

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	1.95	2.10	0.077	0.083
B	3.48	3.73	0.137	0.147
C	4.25	4.75	0.167	0.187
D	1.99	2.61	0.078	0.103
E	0.90	1.41	0.035	0.056
F	5.10	5.30	0.201	0.209
G	0.10	0.20	0.004	0.008
H	0.15	0.31	0.006	0.012
I	0.15	0.31	0.006	0.012

Marking Diagram



- P/N = Specific Device Code
- G = Green Compound
- YW = Date Code
- F = Factory Code

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [Taiwan Semiconductor manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RD0506LS-SB-1H](#) [RGP30G-E373](#) [DSE010-TR-E](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [HSC285TRF-E](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMD7000LT3G](#) [FC903-TR-E](#) [1N4449](#) [1N4934-E3/73](#) [1SS226-TP](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)