

16A, 20V - 150V Schottky Barrier Rectifier

FEATURES

- AEC-Q101 qualified available
- Low power loss, high efficiency
- Guard ring for overvoltage protection
- High surge current capability
- UL Recognized File # E-326243
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21


APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Monitor
- DC to DC converters
- TV


MECHANICAL DATA

- Case: TO-247AD (TO-3P)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Mounting torque: 1.13 N·m maximum
- Polarity: As marked
- Weight: 5.60g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
I_F	16	A
V_{RRM}	20 - 150	V
I_{FSM}	200	A
T_{JMAX}	125, 150	°C
Package	TO-247AD (TO-3P)	
Configuration	Dual dies	

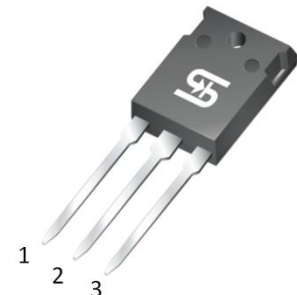

TO-247AD (TO-3P)

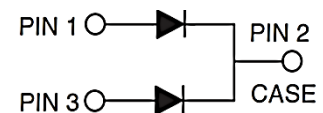

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)										
PARAMETER	SYMBOL	SR 1620 PT	SR 1630 PT	SR 1640 PT	SR 1650 PT	SR 1660 PT	SR 1690 PT	SR 16100 PT	SR 16150 PT	UNIT
Marking code on the device		SR 1620 PT	SR 1630 PT	SR 1640 PT	SR 1650 PT	SR 1660 PT	SR 1690 PT	SR 16100 PT	SR 16150 PT	
Repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	90	100	150	V
Reverse voltage, total rms value	$V_{R(RMS)}$	14	21	28	35	42	63	70	105	V
Forward current	I_F	16								A
Surge peak forward current 8.3ms single half sine wave superimposed on rated load	I_{FSM}	200								A
Junction temperature	T_J	-55 to +125				-55 to +150				°C
Storage temperature	T_{STG}	-55 to +150								°C

THERMAL PERFORMANCE			
PARAMETER	SYMBOL	TYP	UNIT
Junction-to-case thermal resistance	$R_{\theta JC}$	3	°C/W

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)						
PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage per diode ⁽¹⁾	SR1620PT SR1630PT SR1640PT	$I_F = 8\text{A}, T_J = 25^\circ\text{C}$	V_F	-	0.55	V
	SR1650PT SR1660PT			-	0.70	V
	SR1690PT SR16100PT			-	0.90	V
	SR16150PT			-	1.00	V
Reverse current @ rated V_R per diode ⁽²⁾	SR1620PT SR1630PT SR1640PT SR1650PT SR1660PT	$T_J = 25^\circ\text{C}$	I_R	-	500	μA
	SR1690PT SR16100PT SR16150PT			-	100	μA
	SR1620PT SR1630PT SR1640PT	$T_J = 100^\circ\text{C}$		-	15	mA
	SR1650PT SR1660PT			-	10	mA
	SR1690PT SR16100PT SR16150PT			-	-	mA
	SR1620PT SR1630PT SR1640PT SR1650PT SR1660PT			$T_J = 125^\circ\text{C}$	-	-
	SR1690PT SR16100PT SR16150PT	-			5	mA

Notes:

1. Pulse test with $PW = 0.3\text{ms}$
2. Pulse test with $PW = 30\text{ms}$

ORDERING INFORMATION		
ORDERING CODE ⁽¹⁾⁽²⁾	PACKAGE	PACKING
SR16xPT	TO-247AD (TO-3P)	30 / Tube
SR16xPTH	TO-247AD (TO-3P)	30 / Tube

Notes:

1. "x" defines voltage from 20V(SR1620PT) to 150V(SR16150PT)
2. "H" means AEC-Q101 qualified

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

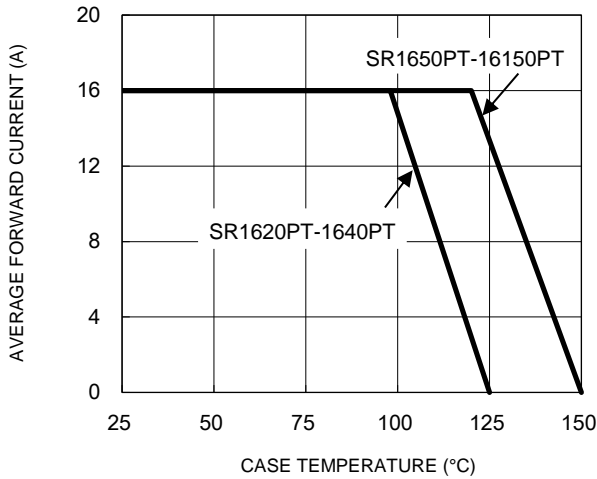


Fig.2 Typical Junction Capacitance

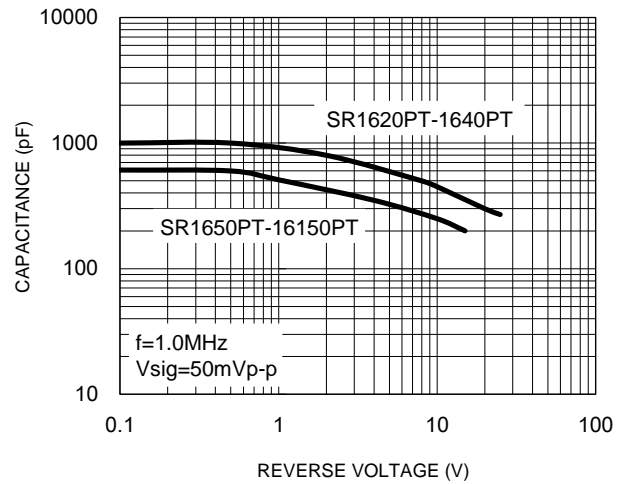


Fig.3 Typical Reverse Characteristics

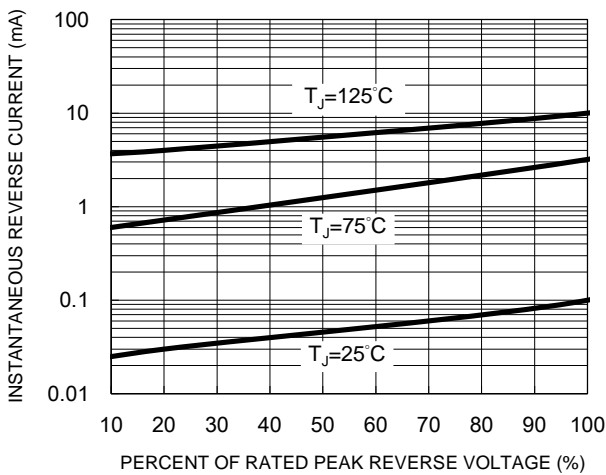


Fig.4 Typical Forward Characteristics


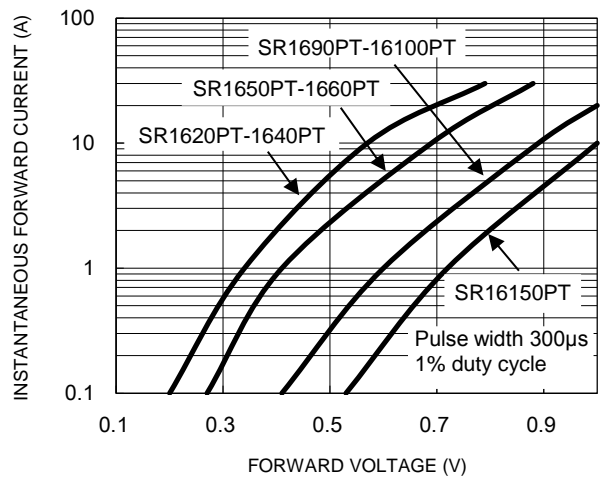



Fig.5 Maximum Non-Repetitive Forward Surge Current

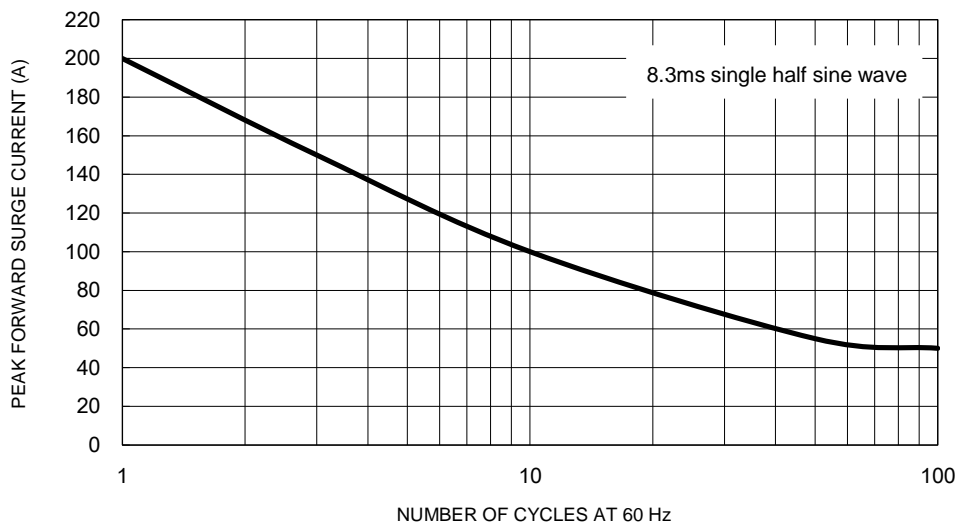


CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.6 Typical Transient Thermal Impedance

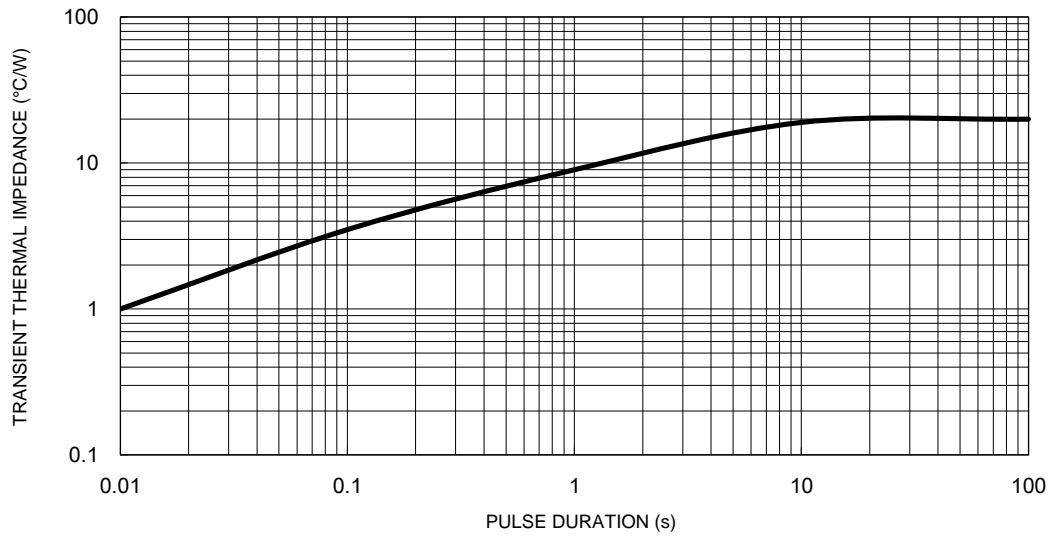


PACKAGE OUTLINE DIMENSIONS

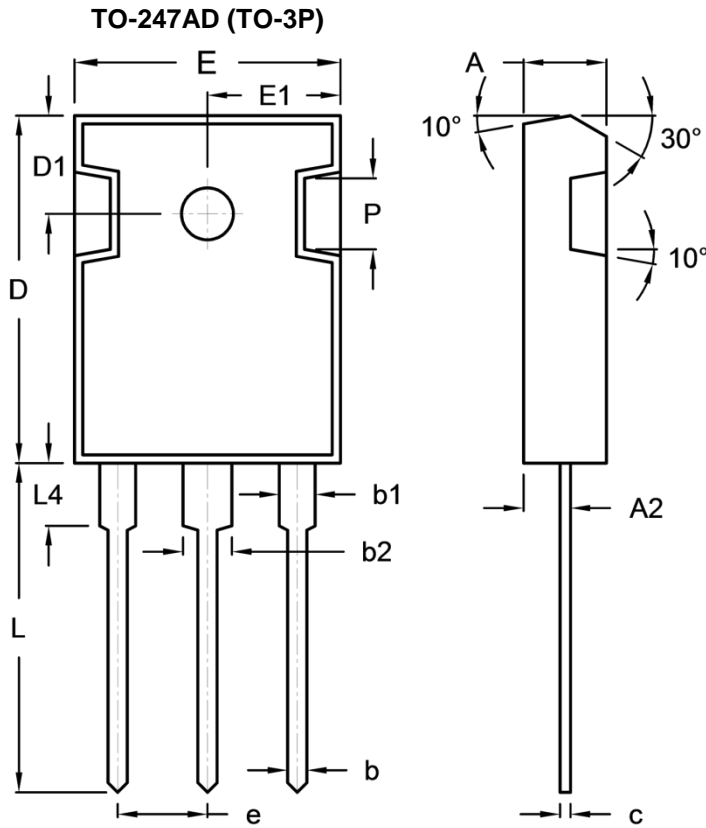

DIM	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	4.90	5.16	0.193	0.203
A2	2.70	3.00	0.106	0.118
b	1.12	1.22	0.044	0.048
b1	1.93	2.18	0.076	0.086
b2	2.97	3.22	0.117	0.127
c	0.51	0.76	0.020	0.030
D	20.80	21.30	0.819	0.839
D1	5.70	6.20	0.224	0.244
E	15.90	16.40	0.626	0.646
E1	7.90	8.20	0.311	0.323
e	5.20	5.70	0.205	0.224
H	2.90	3.40	0.114	0.134
L	19.70	20.20	0.776	0.795
L4	3.50	4.10	0.138	0.161
P	-	4.30	-	0.169

MARKING DIAGRAM



- P/N = Marking Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Taiwan Semiconductor](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [RB551V-30](#)
[BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SK310-T](#)
[SK32A-LTP](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#)
[SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [SS15E-TP](#) [VS-](#)
[6CWQ10FNHM3](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#)
[CDBQC0240LR-HF](#) [ACDBA340-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [SK310B-TP](#) [MA4E2502L-1246](#) [MA4E2502H-1246](#)
[NRVBM120ET1G](#) [NSR01L30MXT5G](#) [NTE573](#)