

3A, 400V ESD Capability Rectifier

FEATURES

- High ESD capability
- Glass passivated chip junction
- Ideal for automated placement
- Low forward voltage drop
- High surge current capability
- Moisture sensitivity level: level 1, per J-STD-020
- AEC-Q101 qualified available:
ordering code with suffix "H"
- Compliant to RoHS Directive 2011/65/EU and
in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
I_F	3	A
V_{RRM}	400	V
I_{FSM}	100	A
V_F at $I_F=3A$	1	V
$T_{J\ MAX}$	175	°C
Package	DO-214AB (SMC)	
Configuration	Single die	

APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- Converter



MECHANICAL DATA

- Case: DO-214AB (SMC)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Weight: 0.210 g (approximately)



DO-214AB (SMC)

SOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	TSD3G	UNIT
Marking code on the device		TSD3G	
Repetitive peak reverse voltage	V_{RRM}	400	V
Reverse voltage, total rms value	$V_{R(RMS)}$	280	V
Forward current	I_F	3	A
Surge peak forward current, 8.3ms single half sine-wave superimposed on rated load per diode	I_{FSM}	100	A
Junction temperature	T_J	- 55 to +175	°C
Storage temperature	T_{STG}	- 55 to +175	°C

THERMAL PERFORMANCE			
PARAMETER	SYMBOL	TYP	UNIT
Junction-to-lead thermal resistance	$R_{\theta JL}$	21	$^{\circ}C/W$
Junction-to-ambient thermal resistance	$R_{\theta JA}$	59	$^{\circ}C/W$
Junction-to-case thermal resistance	$R_{\theta JC}$	22	$^{\circ}C/W$

Thermal Performance Note: Units mounted on PCB (16mm x 16mm Cu pad test board)

ELECTRICAL SPECIFICATIONS ($T_A = 25^{\circ}C$ unless otherwise noted)					
PARAMETER	CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage ⁽¹⁾	$I_F = 1.5A, T_J = 25^{\circ}C$	V_F	0.85	0.95	V
	$I_F = 3.0A, T_J = 25^{\circ}C$		0.89	1.00	V
	$I_F = 1.5A, T_J = 125^{\circ}C$		0.72	0.90	V
	$I_F = 3.0A, T_J = 125^{\circ}C$		0.76	1.00	V
Reverse current @ rated V_R ⁽²⁾	$T_J = 25^{\circ}C$	I_R	-	1	μA
	$T_J = 125^{\circ}C$		-	50	μA
Junction capacitance	1MHz, $V_R = 4.0V$	C_J	45	-	pF

Notes:

1. Pulse test with PW = 0.3ms
2. Pulse test with PW = 30ms

IMMUNITY TO ELECTRICAL STATIC DISCHARGE TO THE FOLLOWING STANDARDS ($T_A = 25^{\circ}C$ unless otherwise noted)						
Standard	Test Type	Test Conditions	SYMBOL	CLASS	Value	Typical
AEC-Q101-001	Human body model(contact mode)	$C=100pF, R=1.5k\Omega$	V_C	H3B	$\geq 8kV$	N/A
IEC 61000-4-2	Contact mode	$C=150pF, R=330\Omega$		4	$\geq 8kV$	25kV
	Air-discharge mode	$C=150pF, R=330\Omega$		4	$\geq 15kV$	30kV
ISO 10605	Contact mode	$C=330pF, R=330\Omega$		L4	$\geq 15kV$	25kV
	Air-discharge mode	$C=330pF, R=330\Omega$		L4	$\geq 25kV$	30kV

ORDERING INFORMATION		
ORDERING CODE (Note 1,2)	PACKAGE	PACKING
TSD3GHR7G	SMC	850 / 7" Plastic reel
TSD3GHR6G	SMC	3,000 / 13" Paper reel
TSD3GHM6G	SMC	3,000 / 13" Plastic reel
TSD3G R7G	SMC	850 / 7" Plastic reel
TSD3G R6G	SMC	3,000 / 13" Paper reel
TSD3G M6G	SMC	3,000 / 13" Plastic reel
TSD3GHV7G	Matrix SMC	850 / 7" Plastic reel
TSD3GHV6G	Matrix SMC	3,000 / 13" Plastic reel
TSD3G V7G	Matrix SMC	850 / 7" Plastic reel
TSD3G V6G	Matrix SMC	3,000 / 13" Plastic reel

Note:

1. "H" means AEC-Q101 qualified
2. "G" means green compound(halogen free)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

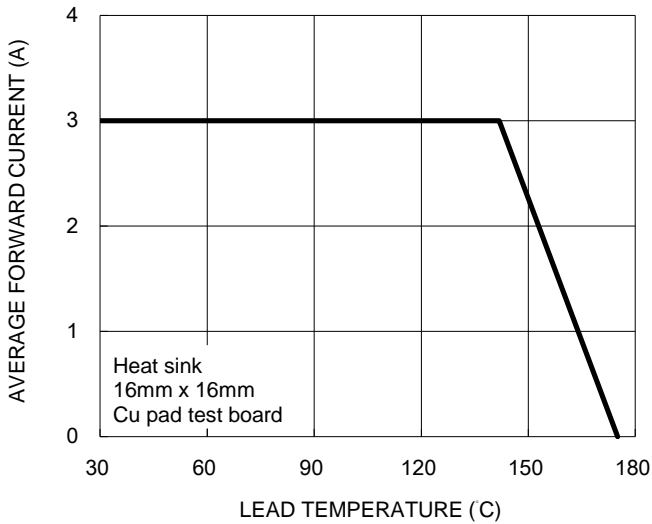


Fig.2 Typical Junction Capacitance

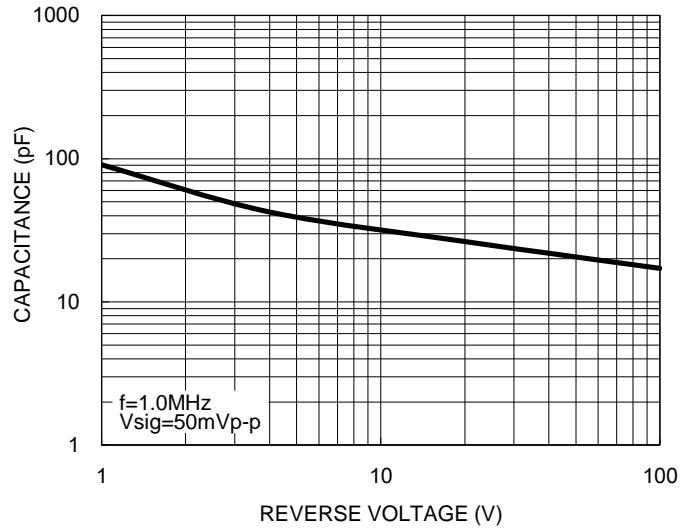


Fig.3 Typical Reverse Characteristics



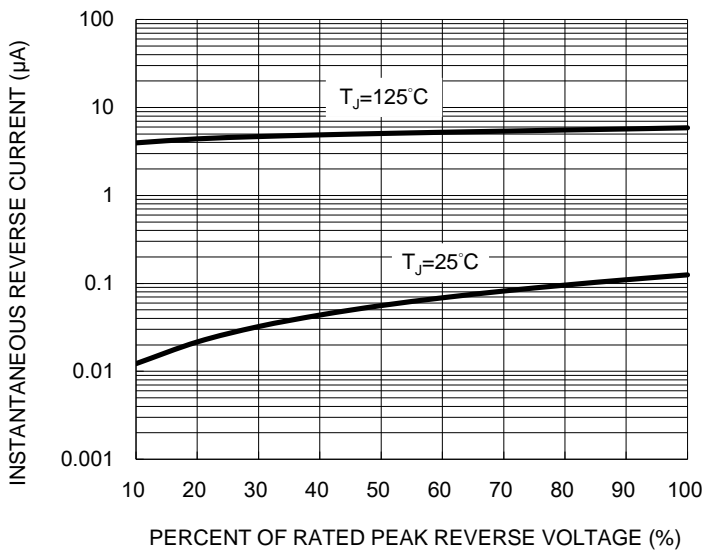


Fig.4 Typical Forward Characteristics

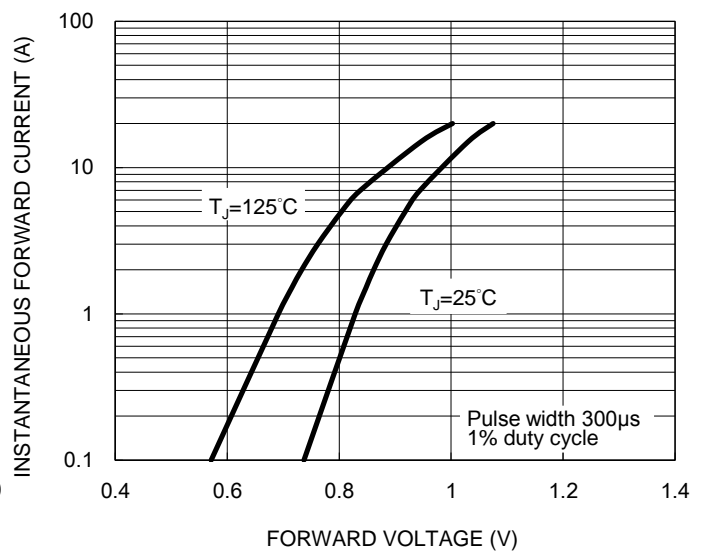


PACKAGE OUTLINE DIMENSIONS

DO-214AB (SMC)

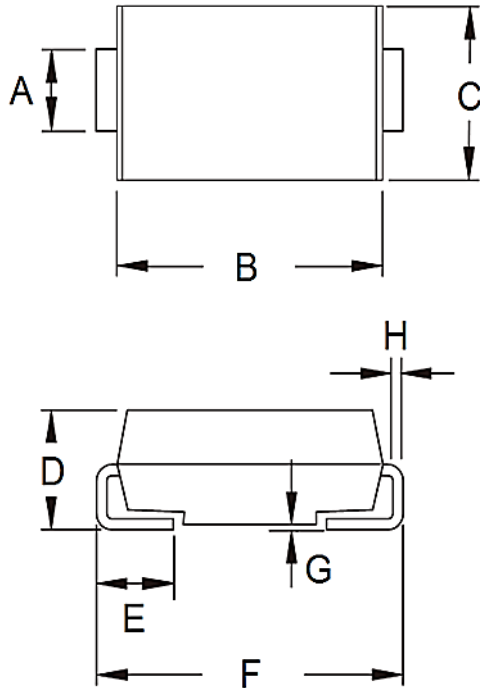

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	2.90	3.20	0.114	0.126
B	6.60	7.11	0.260	0.280
C	5.59	6.22	0.220	0.245
D	2.00	2.62	0.079	0.103
E	1.00	1.60	0.039	0.063
F	7.75	8.13	0.305	0.320
G	0.10	0.20	0.004	0.008
H	0.15	0.31	0.006	0.012

SUGGESTED PAD LAYOUT

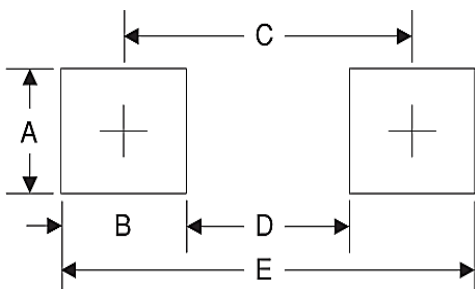

Symbol	Unit (mm)	Unit (inch)
A	3.30	0.130
B	2.50	0.098
C	6.80	0.268
D	4.40	0.173
E	9.40	0.370

MARKING DIAGRAM

Matrix SMC

SMC



- P/N =Marking Code
- G =Green Compound
- YW =Date Code
- F =Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Other Tools](#) category:

Click to view products by [Taiwan Semiconductor](#) manufacturer:

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [899-2-KT46](#) [899-5-KT46](#) [CR-0AFL4--332K](#) [CR-12FP4--260R](#) [CRCW04021961FRT7](#) [5800-0090](#)
[CRCW0603102JRT5](#) [59065-5](#) [00-8273-RDPP](#) [00-8729-WHPP](#) [593033](#) [593058](#) [593072](#) [593564100](#) [593575](#) [593591](#) [593593](#) [011349-000](#)
[LTI506SBLAMNBL](#) [LUC-012S070DSM](#) [LUC-018S070DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [5E4750/01-20R0-T/R](#)
[LW1A-L1-GL](#) [LW1A-P1-GD](#) [LW1L-A1C10V-GL](#) [LW1L-M1C70-A](#) [0202-0173](#) [00-9089-RDPP](#) [00-9300-RDPP](#) [01-1003W-8/32-10](#) [601-](#)
[GP-08-KT39](#) [601-JJ-06](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [602Z](#) [603-JJ-07-FP](#) [603-JJY-04](#) [604J](#) [604-JJ-05](#) [CRTN1013](#) [CS16](#) [6-1579014-0](#)
[CSB2](#) [C-S-C](#)