

Small Signal Product

Surface Mount Schottky Barrier

FEATURES

- Designed for mounting on small surface
- Extremely thin/leadless package
- Low capacitance
- Low forward voltage drop
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21







0603

MECHANICAL DATA

- Case: 0603
- Terminal: Gold plated, solderable per MIL-STD-750, method 2026
- Polarity: Indicated by cathode band
- Weight: 3 mg (approximately)
- Marking code: BC

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)					
PARAMETER		SYMBOL	VALUE	UNIT	
Repetitive Peak Reverse Voltage		V _{RRM}	40	V	
DC Reverse Voltage		V _R	40	V	
RMS Reverse Voltage		V _{R(RMS)}	28	V	
Average Forward Current		Ι _Ο	200	mA	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rate Load		I _{FSM}	600	mA	
Power Dissipation		Pd	150	mW	
Forward Voltage	I _F = 1.0 mA	VF	0.38	V	
	$I_F = 40 \text{ mA}$	VF	1.0	v	
Reverse Leakage Current	V _R = 30 V	I _R	0.2	μA	
Typical Capacitance Between Terminals $V_R = 0 V$, f = 1.0 MHz Reverse Voltage		CJ	5	pF	
Reverse Recovery Time			5	ns	
$(I_{F}=I_{R}=10mA, I_{RR}=0.1 \times I_{R}, R_{L}=100\Omega)$		t _{rr}	5		
Junction Temperature		TJ	-65 to +125	°C	
Storage Temperature		T _{STG}	-65 to +125	°C	



Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

(T_A=25°C unless otherwise noted)



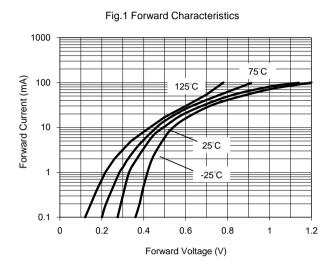


Fig. 2 Reverse Characteristics

125°C



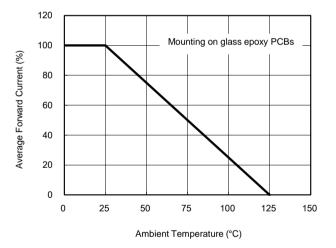

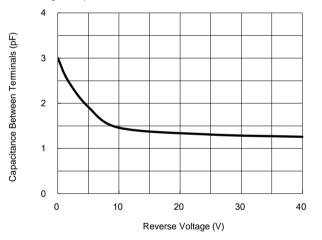



Small Signal Product

Taiwan Semiconductor


ORDERING INFORMATION						
PART NO.	PACKING CODE	IG CODE PACKING CODE SUFFIX		PACKING		
TSS40U	RG	G	0603	4K / 7" Reel		

Note: Whole series with green compound

EXAMPLE						
EXAMPLE PART NO.	PART NO.	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION		
TSS40U RGG	TSS40U	RG	G	Green compound		

PACKAGE OUTLINE DIMENSION

0603

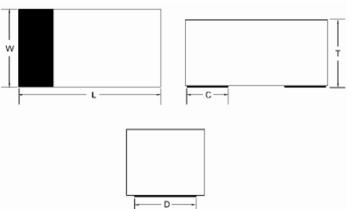

Γ	DIM.	Unit (mm)			Unit (inch)		
		Min	Тур.	Max	Min	Тур.	Max
	L	1.60	-	1.80	0.063	-	0.071
	W	0.80	-	1.00	0.031	-	0.039
	Т	0.70	-	0.85	0.028	-	0.033
	С	-	0.45	-	-	0.018	-
	D	-	0.70	-	-	0.028	-

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its b assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implie any intellectual property rights is granted by this document. Except as provided in TSC's terms and condition sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to f indemnify TSC for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Taiwan Semiconductor manufacturer:

Other Similar products are found below :

MA4E2039 D1FH3-5063 MBR10100CT-BP MBR1545CT MMBD301M3T5G RB160M-50TR RB551V-30 BAS16E6433HTMA1 BAT 54-02LRH E6327 NSR05F40QNXT5G NTE555 JANS1N6640 SB07-03C-TB-H SB1003M3-TL-W SK310-T SK32A-LTP SK33A-TP SK34B-TP SS3003CH-TL-E GA01SHT18 CRS10I30A(TE85L,QM MA4E2501L-1290 MBRB30H30CT-1G SB007-03C-TB-E SK32A-TP SK33B-TP SK35A-TP SK38B-TP NRVBM120LT1G NTE505 NTSB30U100CT-1G SS15E-TP VS-6CWQ10FNHM3 ACDBA1100LR-HF ACDBA1200-HF ACDBA140-HF ACDBA2100-HF ACDBA3100-HF CDBQC0530L-HF CDBQC0240LR-HF ACDBA340-HF ACDBA260LR-HF ACDBA1100-HF SK310B-TP MA4E2502L-1246 MA4E2502H-1246 NRVBM120ET1G NSR01L30MXT5G NTE573 NTE6081