



\*Pb Free part

Customer Name	Standard specifications	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GPS+GLONASS (Unbalance 50/50 ohm)	Date	Sep. 5, 2012
Part Number	F6QA1G585M2AT	Version 1.0a	FINAL

**Table 1.Electrical specifications** 

Passband:1565.42 ~ 1605.886 MHz						
	Frequency	Specification				
Parameter		Min.	Тур.	Max.	Unit	Remarks
Operating temperature		-30	-	+85	°C	
Insertion loss	1574.42-1576.42 MHz	-	1.1	1.4	dB	(*1)
Insertion loss	1565.42-1585.42 MHz		1.4	1.7	dB	(*1)
Insertion loss	1597.5515-1605.886 MHz	-	1.1	1.7	dB	(*1)
	1574.42-1576.42 MHz	-	1.2	2.0	-	
VSWR(input/output)	1565.42-1585.42 MHz		1.5	2.0	-	
	1597.5515-1605.886 MHz	-	1.5	2.0	-	
Absolute Attenuation	10 – 925 MHz	32	35	-	dB	
	925 – 960 MHz	32	35	-	dB	
	1427 – 1463 MHz	32	37	-	dB	
	1710 – 1785 MHz	32	39	-	dB	
	1850 – 1910 MHz	31	37	-	dB	
	1920 – 1980 MHz	31	36	-	dB	
	2401 – 2483 MHz	32	37	-	dB	
	2500 – 2570 MHz	32	36	-	dB	
Input impedance			50//36nH		ohm	
Output impedance			50		ohm	
(†1) 0 :5	1.1typ.	x 0.9typ. x 0	0.5max.	mm	1 (0.4 ID)	

<sup>(\*1)</sup> Specification of insertion loss includes loss that comes from the test board (0.1dB).






\*Pb Free part

Customer Name	Standard specifications	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GPS+GLONASS (Unbalance 50/50 ohm)	Date	Sep. 5, 2012
Part Number	F6QA1G585M2AT	Version 1.0a	FINAL

## **Dimensions**

Device size: 1.1typ. x 0.9typ. x 0.5max.

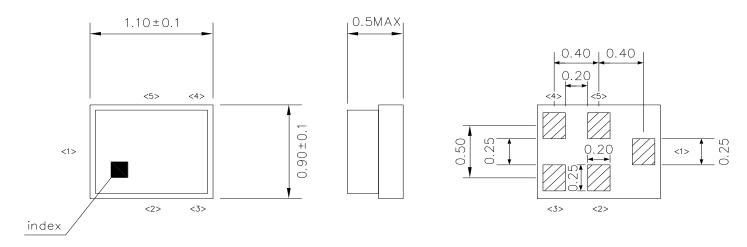


Unit: mm

## **Pin Configuration**

Pin No.	Pin name	Description
1	IN	Unbalanced pin
2	GND	Ground
3	GND	Ground
4	OUT	Unbalanced pin
5	GND	Ground

### **Evaluation Circuit**

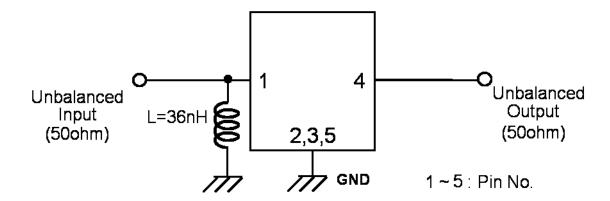







*Pb Free part				
Customer Name	Standard specifications	TAIYO YUDEN Mobil	e Technology Co.,Ltd.	
System	GPS+GLONASS (Unbalance 50/50 ohm)	Date	Sep. 5, 2012	
Part Number	F6QA1G585M2AT	Version 1.0a	FINAL	

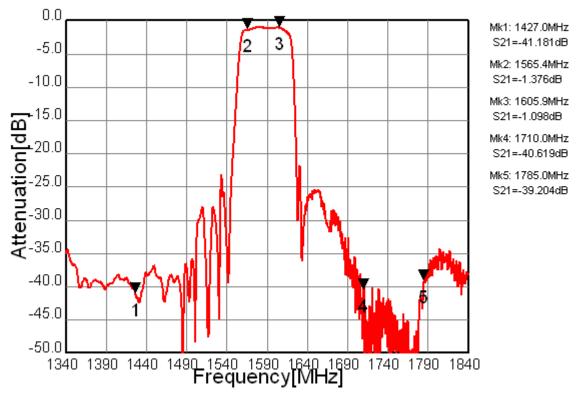


Fig.1 Pass-band Characteristics

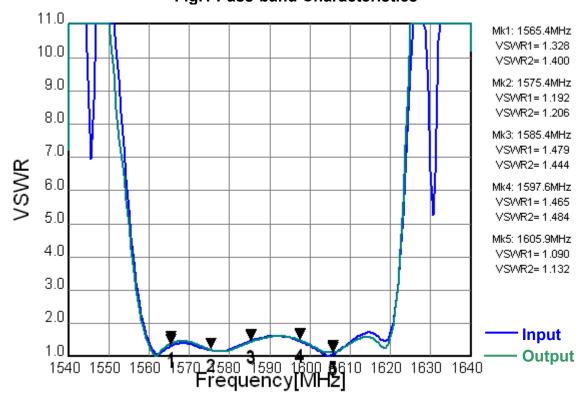


Fig.2VSWR





-80.0

-90.0

-100.0


50

345

640



*Pb Free part					
Customer Name	Standard specifications	TAIYO YUDEN Mobil	e Technology Co.,Ltd.		
System	GPS+GLONASS (Unbalance 50/50 ohm)	Date	Sep. 5, 2012		
Part Number	F6QA1G585M2AT	Version 1.0a	FINAL		

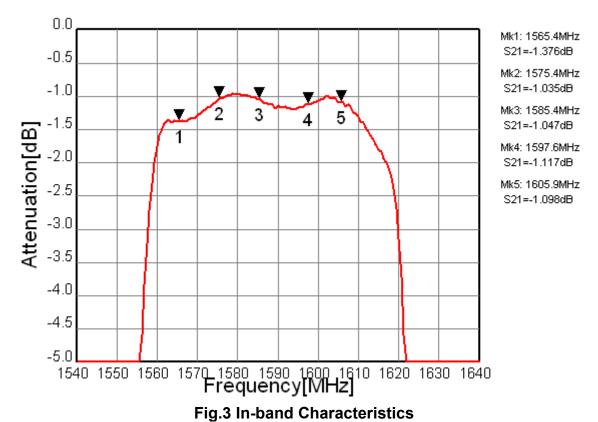

0.0 Mk1: 925.0MHz S21=-35.167dB -10.0 Mk2: 1576.4MHz S21=-1.036dB -20.0Mk3: 1850.0MHz Attennation[dB]
-50.0
-50.0
-70.0 S21=-39.842dB Mk4: 1980.0MHz S21=-37.995dB 5 3 Mk5: 2570.0MHz S21=-36.458dB

Fig.4 Wide-band Characteristics

935\_1230 1525 1820 2115 2410 2705 3000 Frequency[MHz]







*Pb Free part				
Customer Name	Standard specifications	TAIYO YUDEN Mobil	e Technology Co.,Ltd.	
System	GPS+GLONASS (Unbalance 50/50 ohm)	Date	Sep. 5, 2012	
Part Number	F6QA1G585M2AT	Version 1.0a	FINAL	

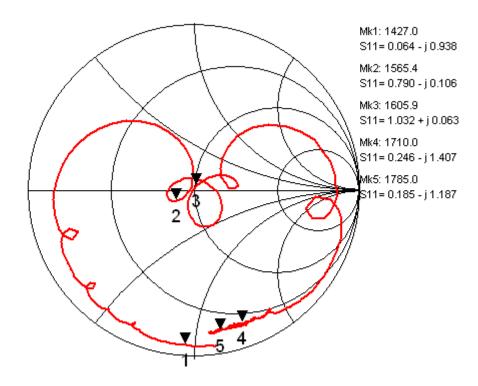


Fig.5 Input Impedance

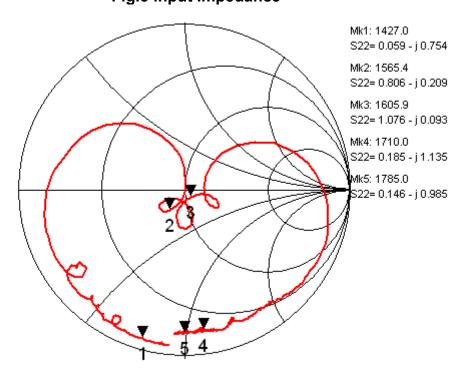


Fig.6 Output Impedance







*Pb Free part
---------------

Customer Name	Standard specifications	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GPS+GLONASS (Unbalance 50/50 ohm)	Date	Sep. 5, 2012
Part Number	F6QA1G585M2AT	Version 1.0a	FINAL

#### **Ordering Code**

Ordering Code	Packing	Reel size	Status
F6QA1G585M2AT-J	Tape & Reel	5,000pcs.	MP
F6QA1G585M2AT-JA	Tape & Reel	less than 5,000 pcs.	MP
F6QA1G585M2AT-Y	Tape & Reel	15,000pcs	MP
F6QA1G585M2AT-YA	Tape & Reel	less than 15,000 pcs.	MP
F6QA1G585M2AT-Q	Bulk	few pcs.	MP

<sup>\*</sup>Minimum order quantity (MOQ) is assigned for each inquiry, Please contact to Sales Representatives.

## **Notice**

All of the contents specified herein are subject to change without notice due to technical improvements, etc.

Please contact TAIYO YUDEN Co., Ltd. for further details of product specifications.

Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.

This product is for general electronics equipment such as Audio-Visual equipment, household electronics, office supplies, information services and telecommunications; therefore, in case this product is used for any medical equipment, space equipment, nuclear equipment or disaster prevention equipment, please contact TAIYO YUDEN in advance.

In case this product is used for general electronics equipment or circuits which require high safety and high reliability, thoroughly evaluate on safety and add a protection circuit if necessary.



<sup>\*</sup>MP: Mass Production

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by Taiyo Yuden manufacturer:

Other Similar products are found below:

MAPDCC0001 MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN B39321R801H210 1A0220-3 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 FM-104-PIN CER0813B MAPDCC0005 3A325 40287 41180 ATB3225-75032NCT BD0810N50100AHF C5060J5003AHF JHS-115-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2194E CDBLB455KCAX39-B0 TGL2208-SM, EVAL RF1353C 1E1305-3 1F1304-3S 1G1304-30 B0922J7575AHF 2020-6622-20 10017-3 TP-103-PIN BD1222J50200AHF BD1722J50100AHF