



Customer Name	Standard Specifications	TAIYO YUDEN Mobile Technology Co., Ltd.		
System	Band39 Rx	DATE Dec. 23, 2		
Part Number	F6QA1G900M2WD	Version 3.0bB	Final	

Table 1. Electrical Specifications

Passband: 1880 ~ 1920 MHz						
14	O a madistica m	Specifications		I I a it	Damada	
Item	Condition	Min.	Тур.	Max.	Unit	Remarks
Insertion Loss	1880-1920 MHz	-	1.5	1.8	dB	(*1)
Ripple	1880-1920 MHz	-	0.3	1.0	dB	
Absolute	50-970 MHz	39	47	-	dB	
attenuation	970-1710MHz	30	40	-	dB	
	1710-1830MHz	25	32	-	dB	
	1970-2400 MHz	20	29	-	dB	
	2400-2500 MHz	35	40	-	dB	
	2500-3850 MHz	25	33	-	dB	
	3850-6000 MHz	15	25	-	dB	
VSWR (Input)	1880-1920 MHz	-	1.7	2.0	-	
VSWR (Output)	1880-1920 MHz	-	1.7	2.0	-	
Input Impedance	Unbalanced		50		ohm	
Output Impedance	Unbalanced		50		ohm	
Operating Temperature			-30 ~ +85		°C	

^(*1) Specification of insertion loss excludes loss that comes from the test board.








MSL1

*Pb Free part

Customer Name	Standard Specifications	TAIYO YUDEN Mobile Technology Co., Ltd.	
System	Band39 Rx	DATE	Dec. 23, 2015
Part Number	F6QA1G900M2WD	Version 3.0bB	Final

Dimensions

Device size: 1.1typ. x 0.9typ. x 0.5max.

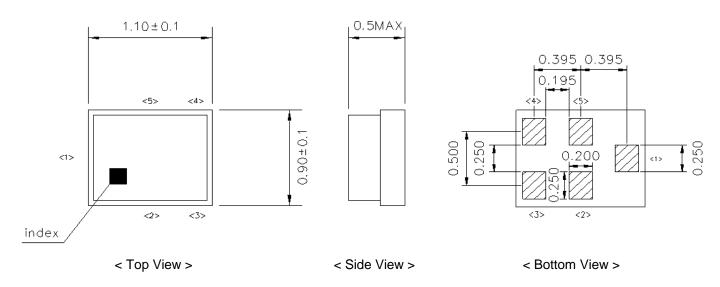


Unit: mm

Pin Configuration

Pin No.	Symbol	Function
1	IN	Unbalanced pin
2	GND	Ground
3	GND	Ground
4	OUT	Unbalanced pin
5	GND	Ground

Evaluation Circuit

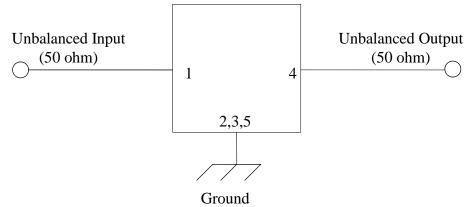

1 to 5 : Pin No.







Customer Name	Standard Specifications	TAIYO YUDEN Mobile Technology Co., Ltd.		
System	Band39 Rx	DATE	Dec. 23, 2015	
Part Number	F6QA1G900M2WD	Version 3.0bB	Final	

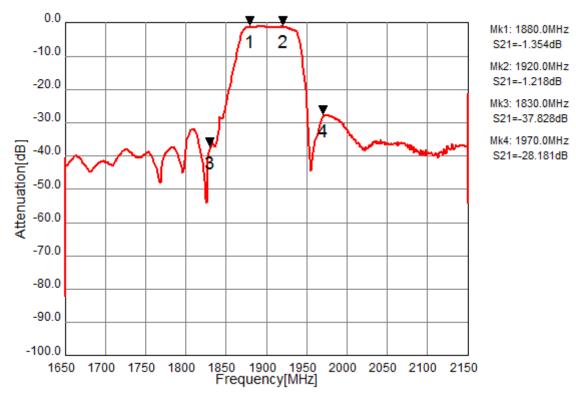


Fig.1 Pass-band Characteristics

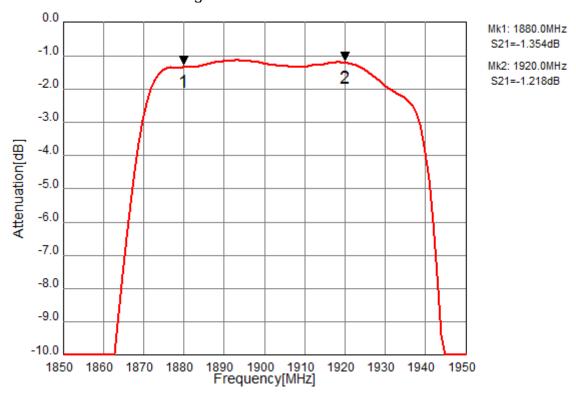


Fig.2 In-band Characteristics







Customer Name	Standard Specifications	TAIYO YUDEN Mobile Technology Co., Ltd.	
System	Band39 Rx	DATE Dec. 23	
Part Number	F6QA1G900M2WD	Version 3.0bB	Final

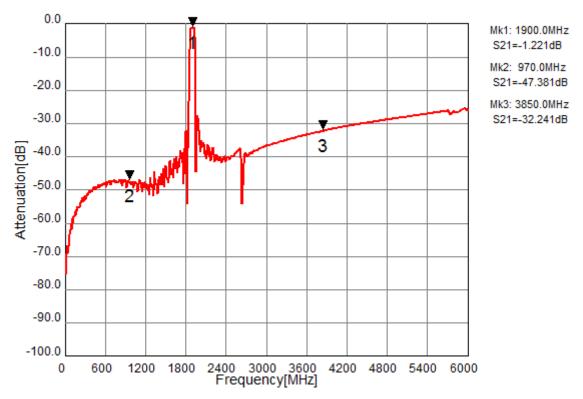


Fig.3 Wide-band Characteristics





Customer Name	Standard Specifications	TAIYO YUDEN Mobile Technology Co., Ltd.		
System	Band39 Rx	DATE	Dec. 23, 2015	
Part Number	F6QA1G900M2WD	Version 3.0bB	Final	

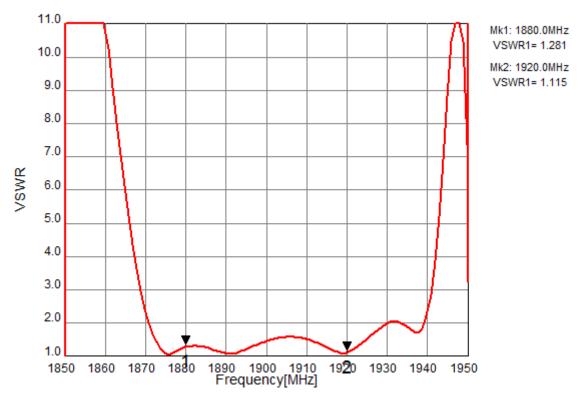


Fig.4 Input VSWR

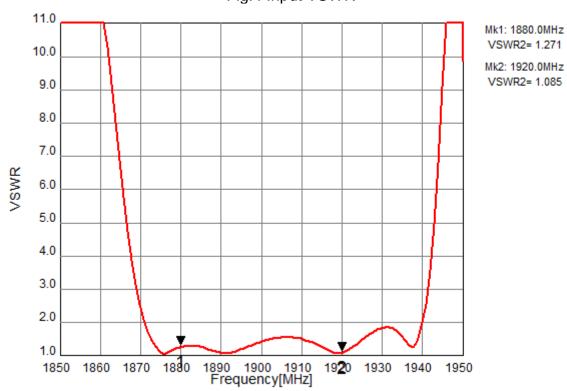


Fig.5 Output VSWR







Customer Name	Standard Specifications	TAIYO YUDEN Mobile Technology Co., Ltd.	
System	Band39 Rx	DATE Dec. 23	
Part Number	F6QA1G900M2WD	Version 3.0bB	Final

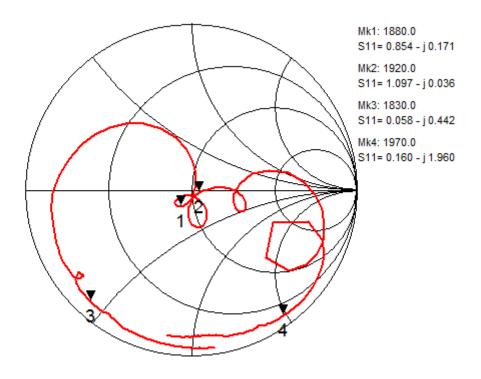


Fig.6 Input Impedance

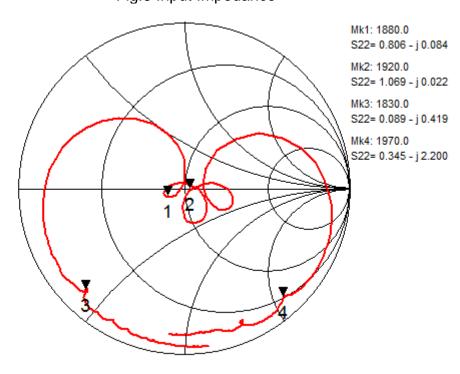


Fig.7 Output Impedance







Customer Name	Standard Specifications	TAIYO YUDEN Mobile Technology Co., Ltd.	
System	Band39 Rx	DATE Dec. 23	
Part Number	F6QA1G900M2WD	Version 3.0bB	Final

Ordering Code

Ordering Code	Packing	Reel size	Status
F6QA1G900M2WD-J	Tape & Reel	5,000 pcs.	MP
F6QA1G900M2WD-JA	Tape & Reel	less than 5,000 pcs.	MP
F6QA1G900M2WD-Y	Tape & Reel	15,000 pcs.	MP
F6QA1G900M2WD-YA	Tape & Reel	less than 15,000 pcs.	MP
F6QA1G900M2WD-Q	Bulk	few pcs.	MP

^{*}Minimum order quantity (MOQ) is assigned for each inquiry, Please contact to Sales Representatives..

Notice

All of the contents specified herein are subject to change without notice due to technical improvements, etc.

Please contact TAIYO YUDEN Co., Ltd. for further details of product specifications.

Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.

This product is for general electronics equipment such as Audio-Visual equipment, household electronics, office supplies, information services and telecommunications; therefore, in case this product is used for any medical equipment, space equipment, nuclear equipment or disaster prevention equipment, please contact TAIYO YUDEN in advance.

In case this product is used for general electronics equipment or circuits which require high safety and high reliability, thoroughly evaluate on safety and add a protection circuit if necessary.



^{*}MP : Mass Production

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by Taiyo Yuden manufacturer:

Other Similar products are found below:

MAPDCC0001 MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN B39321R801H210 1A0220-3 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 FM-104-PIN CER0813B MAPDCC0005 3A325 40287 41180 ATB3225-75032NCT BD0810N50100AHF BD2425J50200AHF C5060J5003AHF JHS-115-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2194E CDBLB455KCAX39-B0 TGL2208-SM, EVAL RF1353C 1E1305-3 1F1304-3S 1G1304-30 B0922J7575AHF 2020-6622-20 10017-3 TP-103-PIN BD1222J50200AHF