



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM850/WCDMA Rx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-881M50-D4DB	Version 4.2 g	

Table 1. Electrical specifications

Passband: 869 ~ 894 MHz						
Item	Condition	Specification				Remark
		Min.	Typ.	Max.	Unit	
Insertion Loss	869 - 894 MHz	-	1.7	2.3	dB	
Ripple	869 - 894 MHz	-	0.5	1.2	dB	
Absolute Attenuation	DC - 824 MHz	40	59	-	dB	
	824 - 849 MHz	40	56	-	dB	
	914 - 970 MHz	25	35	-	dB	
	970 - 1049 MHz	38	57	-	dB	
	1049 - 2000 MHz	40	57	-	dB	
	2000 - 3000 MHz	30	45	-	dB	
	3000 - 6000 MHz	10	18	-	dB	
VSWR(Input)	869 - 894 MHz	-	1.7	2.1		
VSWR(Output)	869 - 894 MHz	-	1.7	2.1		
Input Power	824 - 849 MHz	-	-	17	dBm	
Input Impedance		50			Ohm	
Output Impedance		50			Ohm	
Device Size	-	1.4typ.x1.0typ.x0.5max.			°C	
Operating temp.	-	-30 ~ +85			°C	




MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co., Ltd.	
System	GSM850/WCDMA Rx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-881M50-D4DB	Version 4.2 g	

Dimension

Device size: 1.4mmtyp. x 1.0mmtyp. x 0.5max.

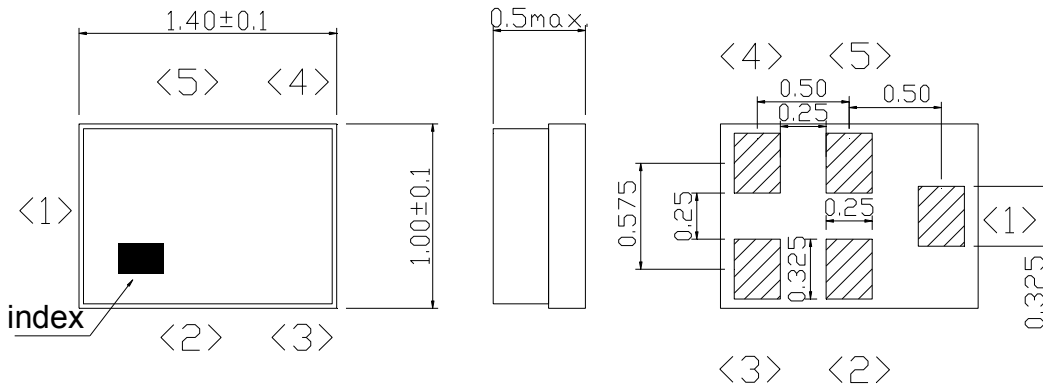


Unit: mm

Pin Configuration

Pin No.	Symbol	Function
1	IN	Unbalanced pin
2	GND	Ground
3	GND	Ground
4	OUT	Unbalanced pin
5	GND	Ground

Evaluation Circuit

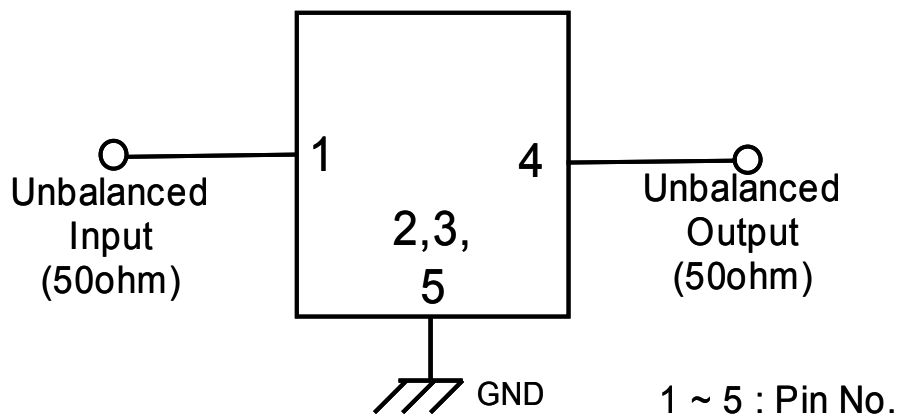



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM850/WCDMA Rx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-881M50-D4DB	Version 4.2 g	

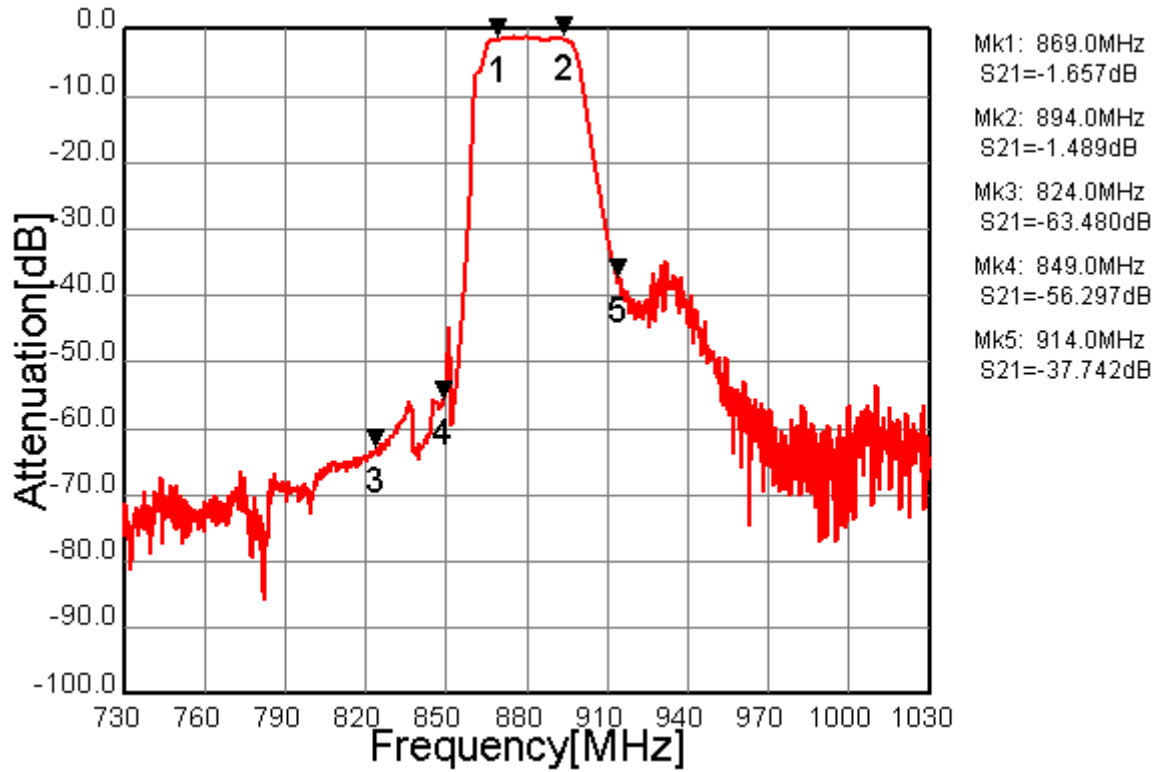


Fig.1 Pass-band Characteristics

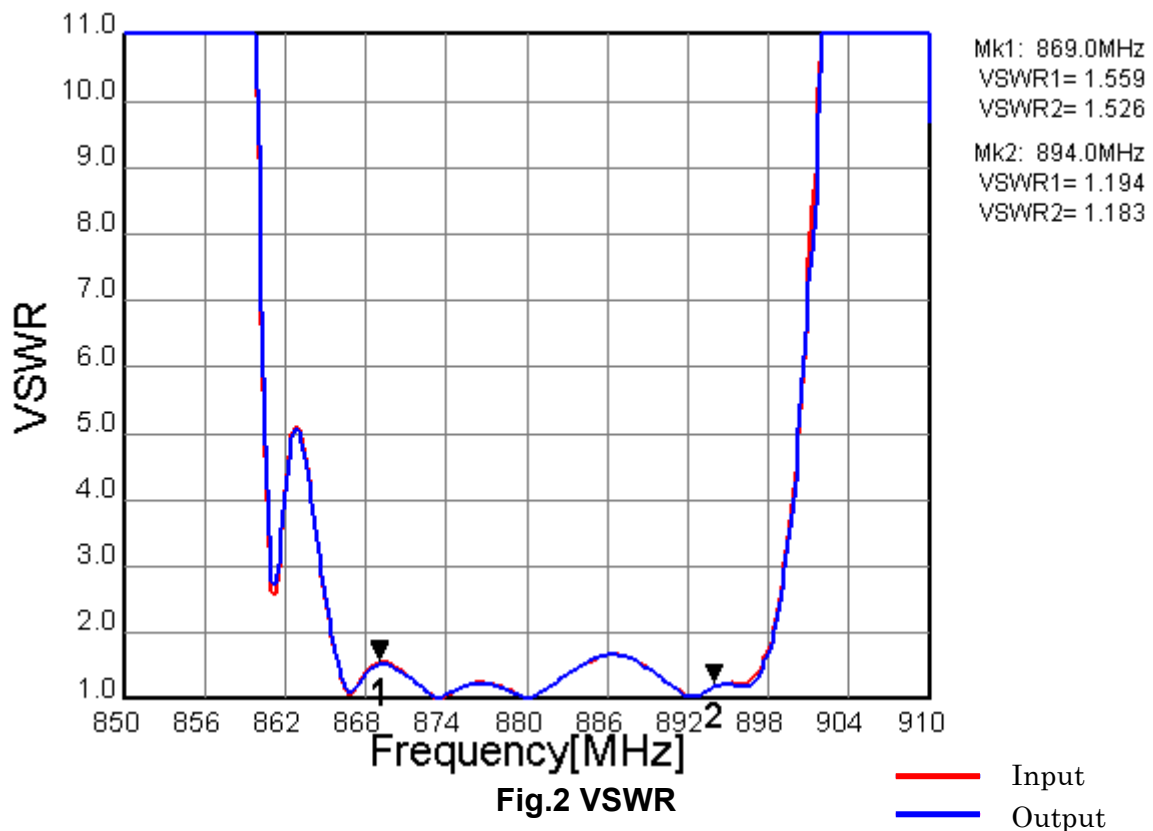


Fig.2 VSWR



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM850/WCDMA Rx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-881M50-D4DB	Version 4.2 g	

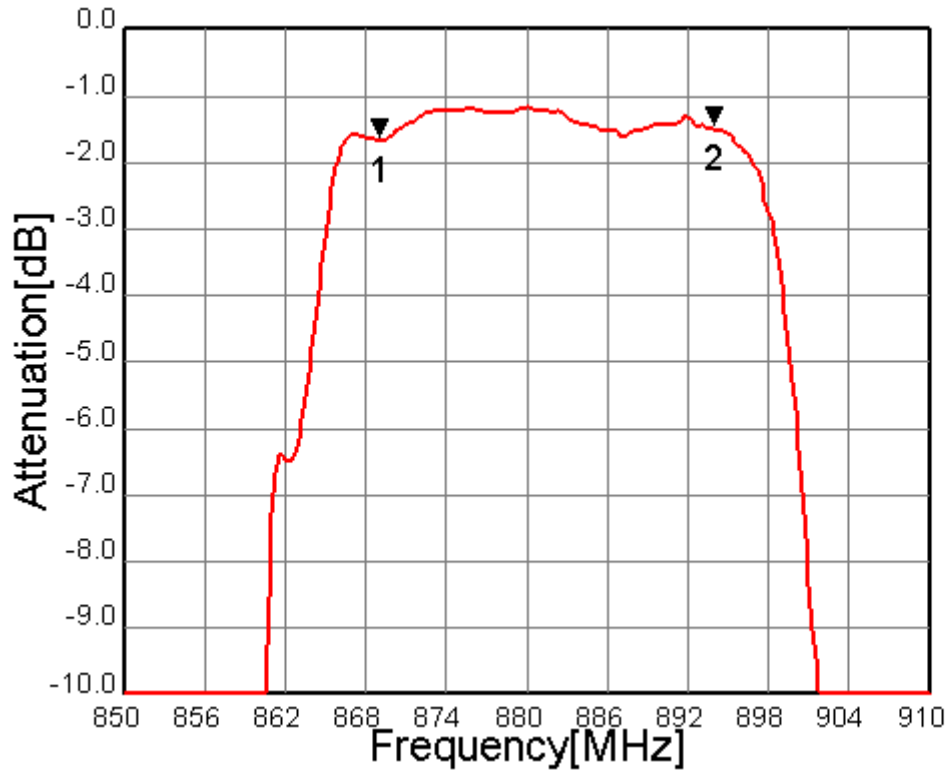


Fig.3 In-band Characteristics

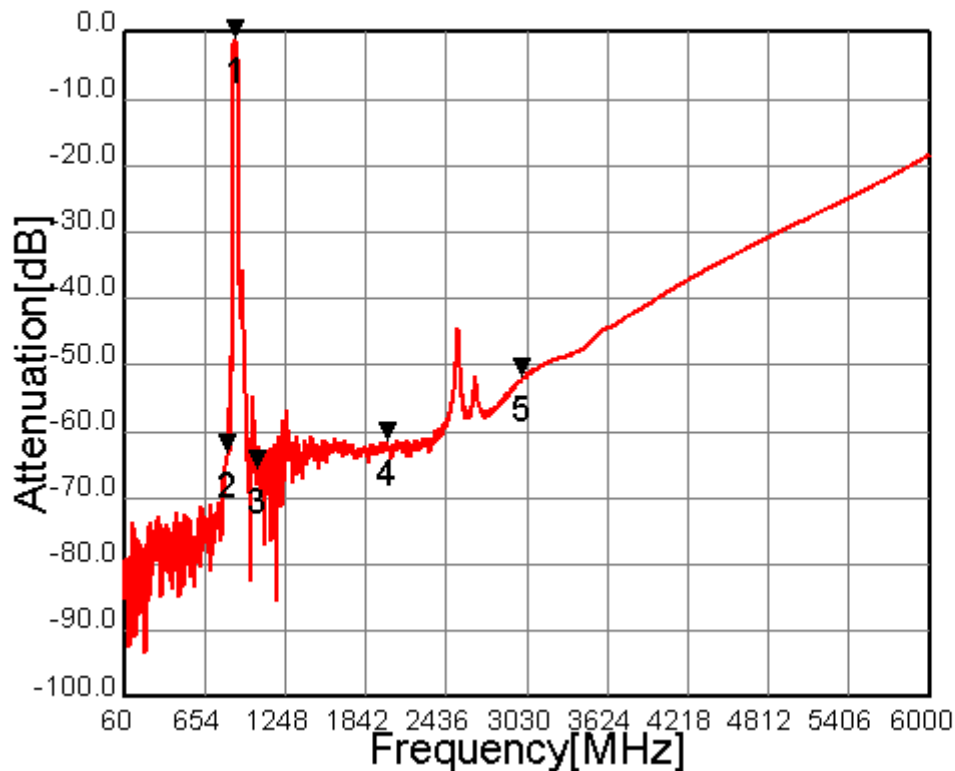


Fig.4 Wide-band Characteristics



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM850/WCDMA Rx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-881M50-D4DB	Version 4.2 g	

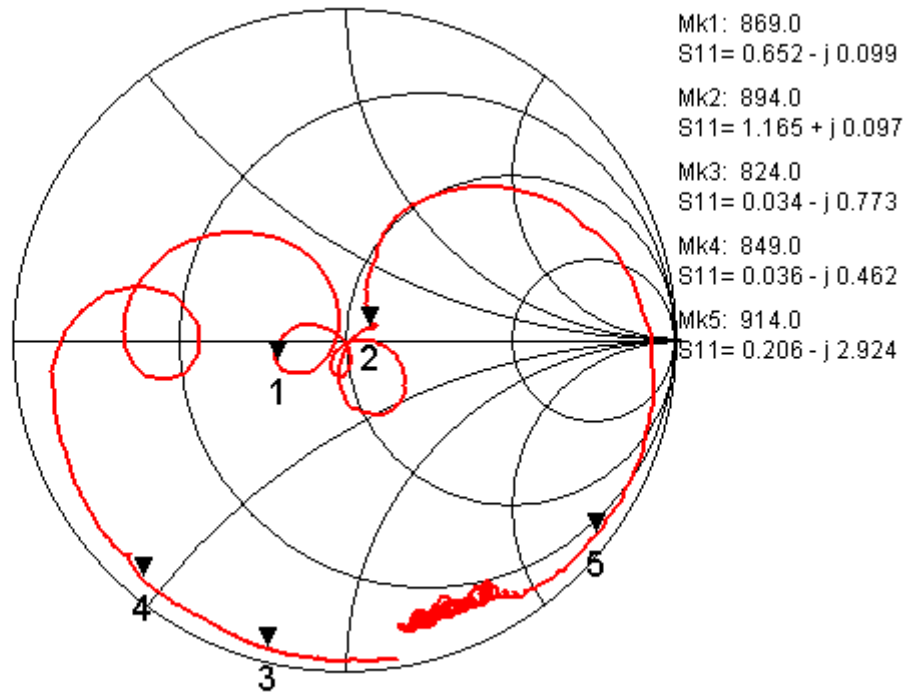


Fig.5 Input Impedance

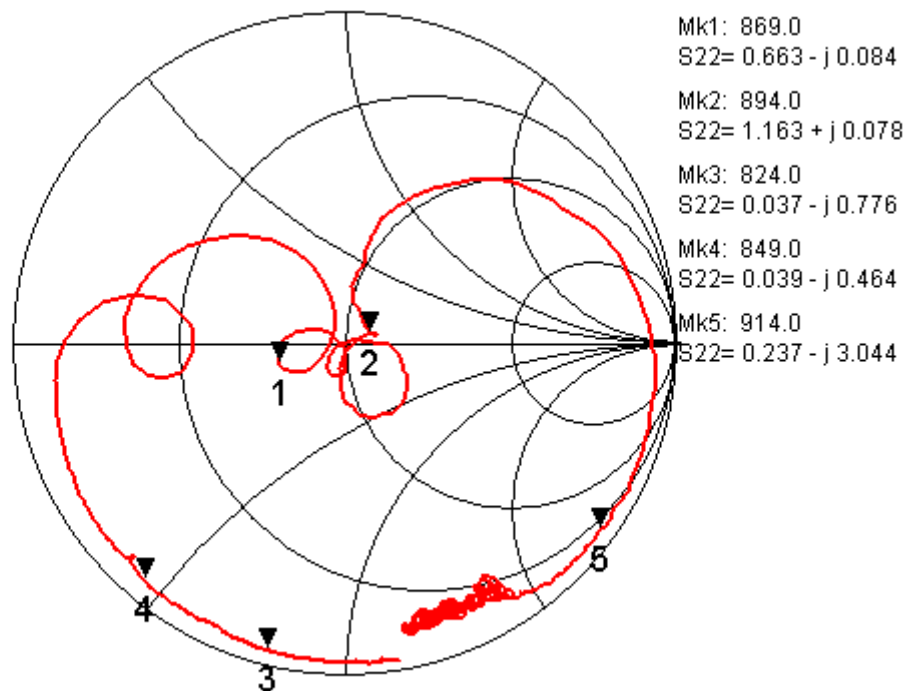


Fig.6 Output Impedance

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Taiyo Yuden](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-103-PIN](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#)