



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co., Ltd.	
System	Low Loss Diversity CDMA Rx (50/100ohm)	Date	March 31, 2010
Part Number	FAR-F5KY-881M50-B4UZ	Version 1.2d	

Table 1. Electrical specifications

Passband: 869 ~ 894 MHz						
Item	Condition (MHz)	Specification			Unit	Remarks
		Min.	Typ.	Max.		
Insertion Loss	869~894	-	1.5	2.2	dB	
Ripple	869~894	-	0.5	1.2	dB	
Attenuation	DC~824	50	72	-	dB	
	824~849	46	61	-	dB	
	824.6~848.4	50	58	-	dB	
	914~960	25	34	-	dB	
	1738~1788	50	66		dB	
	1850~1910	50	66		dB	
	1920~6000	40	53		dB	
VSWR (Input)	869~894	-	1.5	2.0	-	
VSWR (Output)	869~894	-	1.6	2.0	-	
Amplitude balance (S21/S31)	869~894	-1.0	-0.1/+0.2	+1.0	dB	
Phase balance ((ϕ S21- ϕ S31)+180)	869~894	-10	-0.4/+3.8	+10	deg.	
Input Impedance	Unbalanced	50			Ohm	50
Output Impedance	Balanced	100			Ohm	100
Operating Temperature		-30 ~ +85			°C	
Device size		1.4typ. x 1.0typ. x 0.5max.			mm	




MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	Low Loss Diversity CDMA Rx (50/100ohm)	Date	March 31, 2010
Part Number	FAR-F5KY-881M50-B4UZ	Version 1.2d	

Dimensions

Device size: 1.4typ. x 1.0typ. x 0.5max

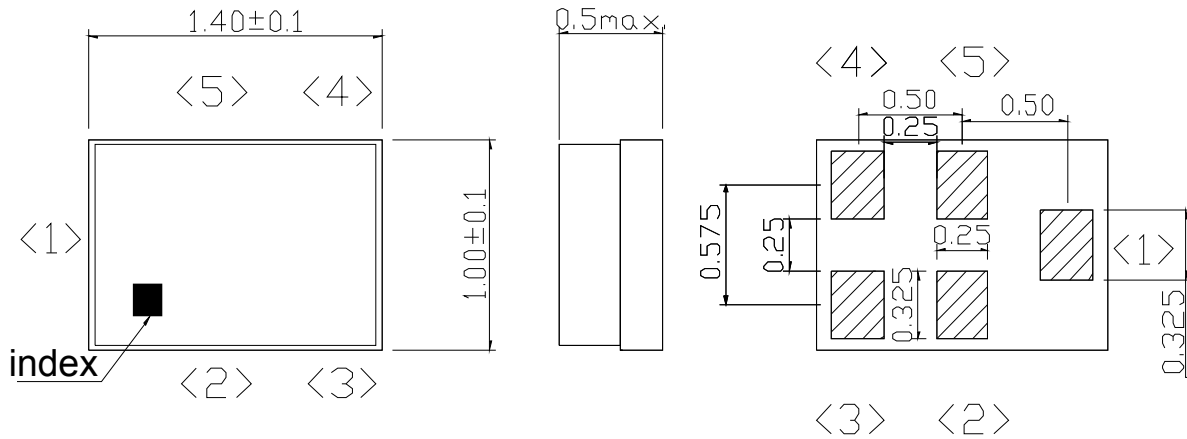


Unit : mm

Pin Configuration

Pin No.	Symbol	Function
1	IN	Unbalanced pin
2	GND	Ground
3	OUT	Balanced pin
4	OUT	Balanced pin
5	GND	Ground

Test Condition

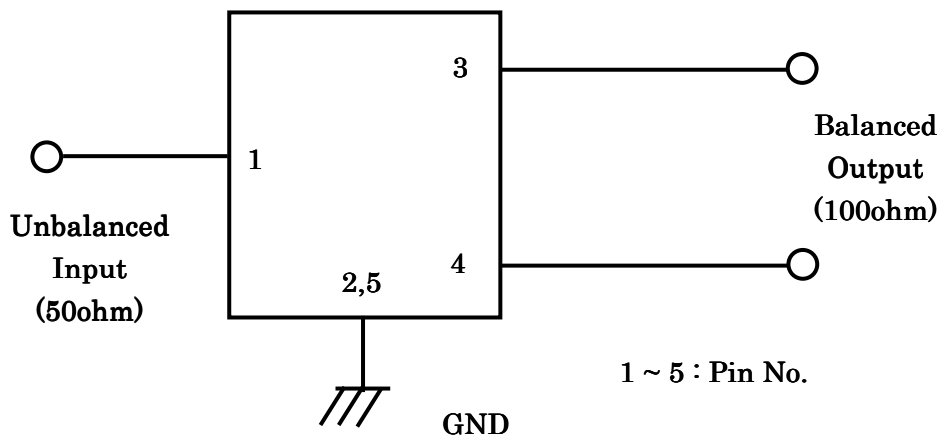



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co., Ltd.	
System	Low Loss Diversity CDMA Rx (50/100ohm)	Date	March 31, 2010
Part Number	FAR-F5KY-881M50-B4UZ	Version 1.2d	

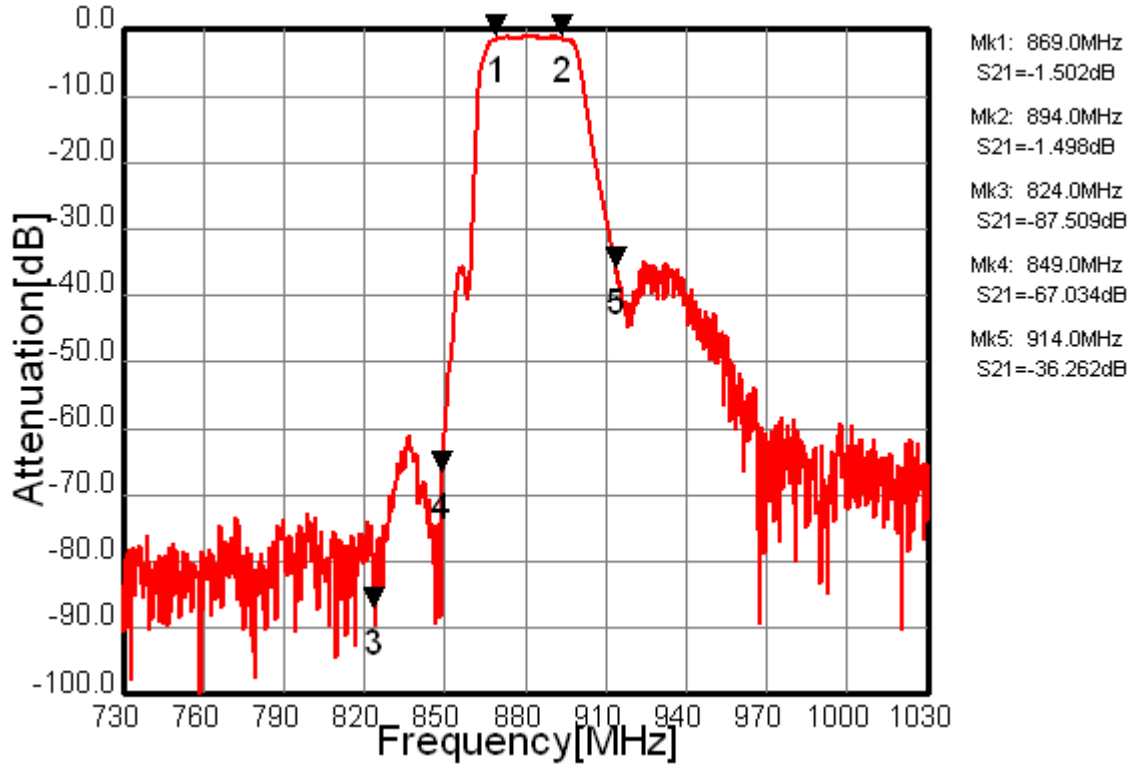


Fig.1 Pass-band Characteristics

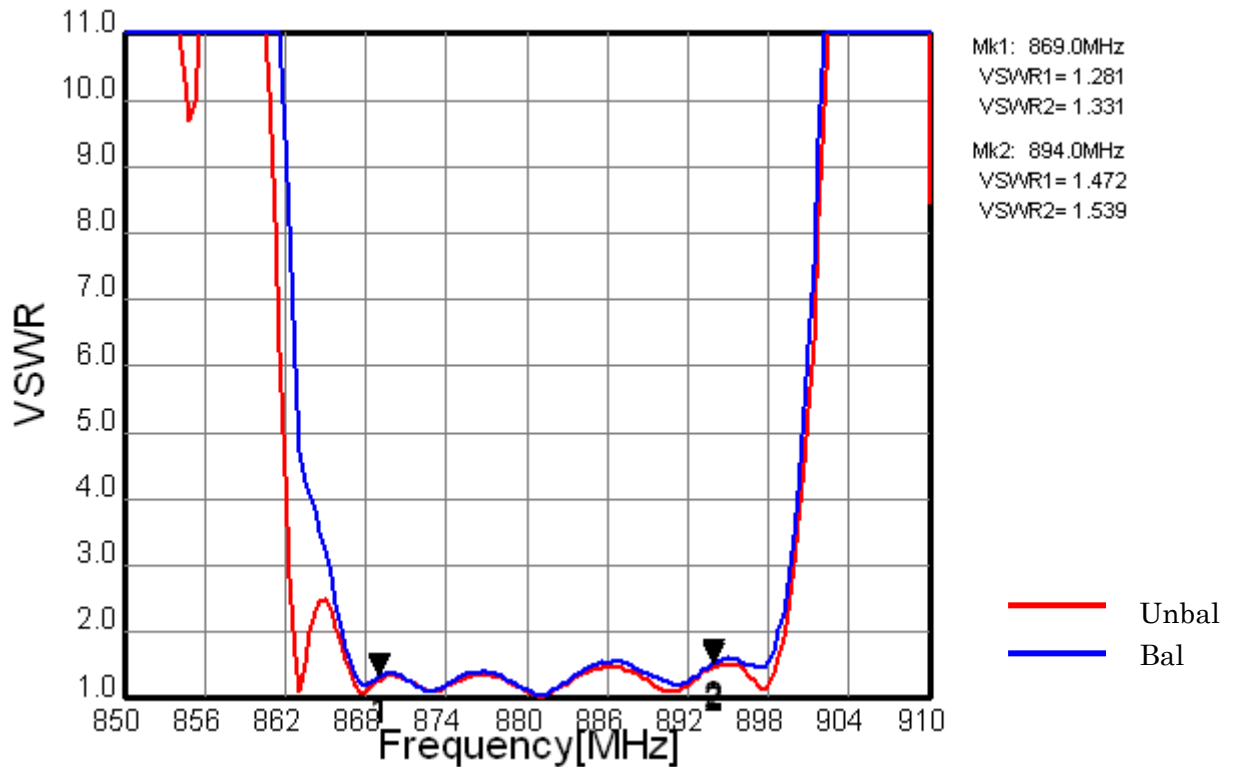


Fig.2 VSWR



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co., Ltd.	
System	Low Loss Diversity CDMA Rx (50/100ohm)	Date	March 31, 2010
Part Number	FAR-F5KY-881M50-B4UZ	Version 1.2d	

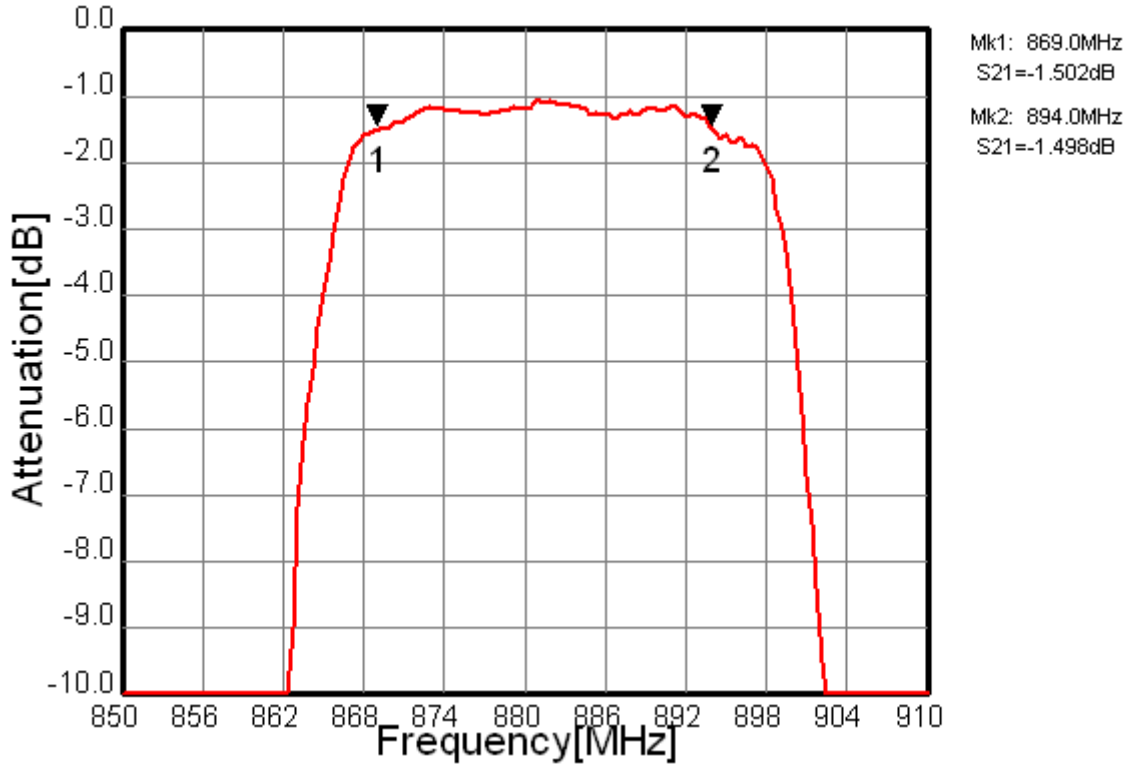


Fig.3 In-band Characteristics

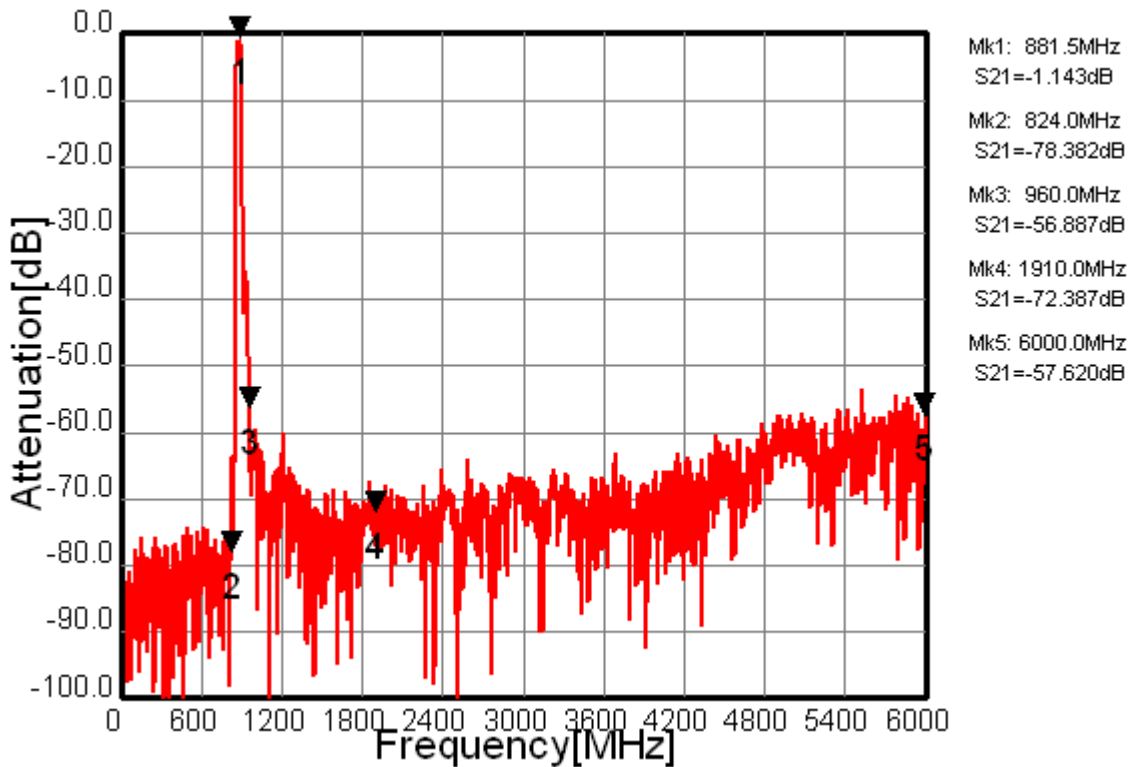


Fig.4 Wide-band Characteristics



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co., Ltd.	
System	Low Loss Diversity CDMA Rx (50/100ohm)	Date	March 31, 2010
Part Number	FAR-F5KY-881M50-B4UZ	Version 1.2d	

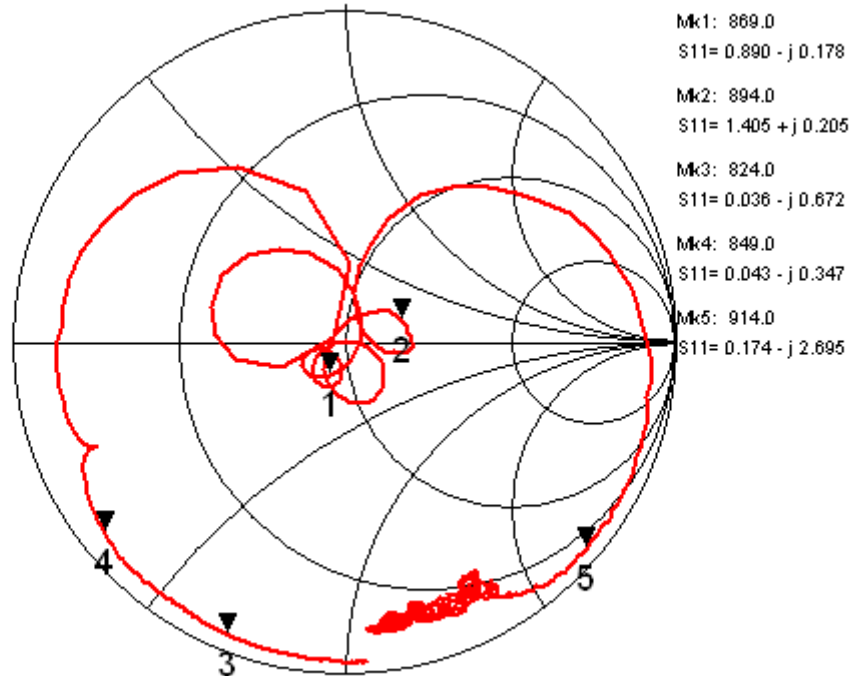


Fig.5 Input Impedance (Unbalance)

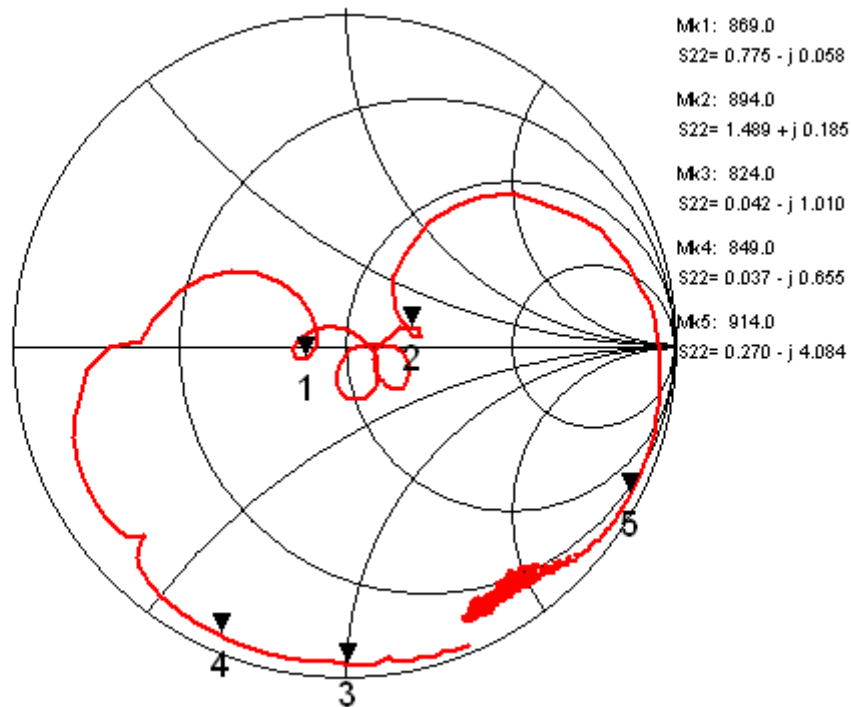


Fig.6 Output Impedance (Balance)



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co., Ltd.	
System	Low Loss Diversity CDMA Rx (50/100ohm)	Date	March 31, 2010
Part Number	FAR-F5KY-881M50-B4UZ	Version 1.2d	

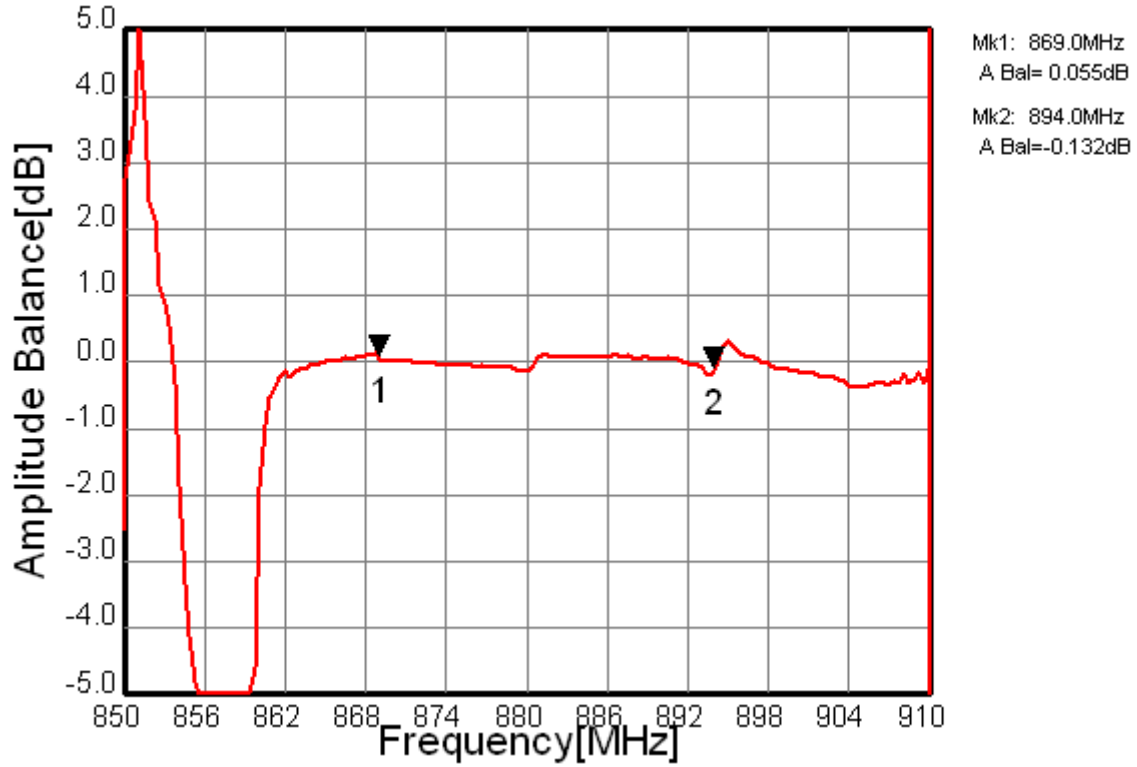


Fig.7 Amplitude Balance

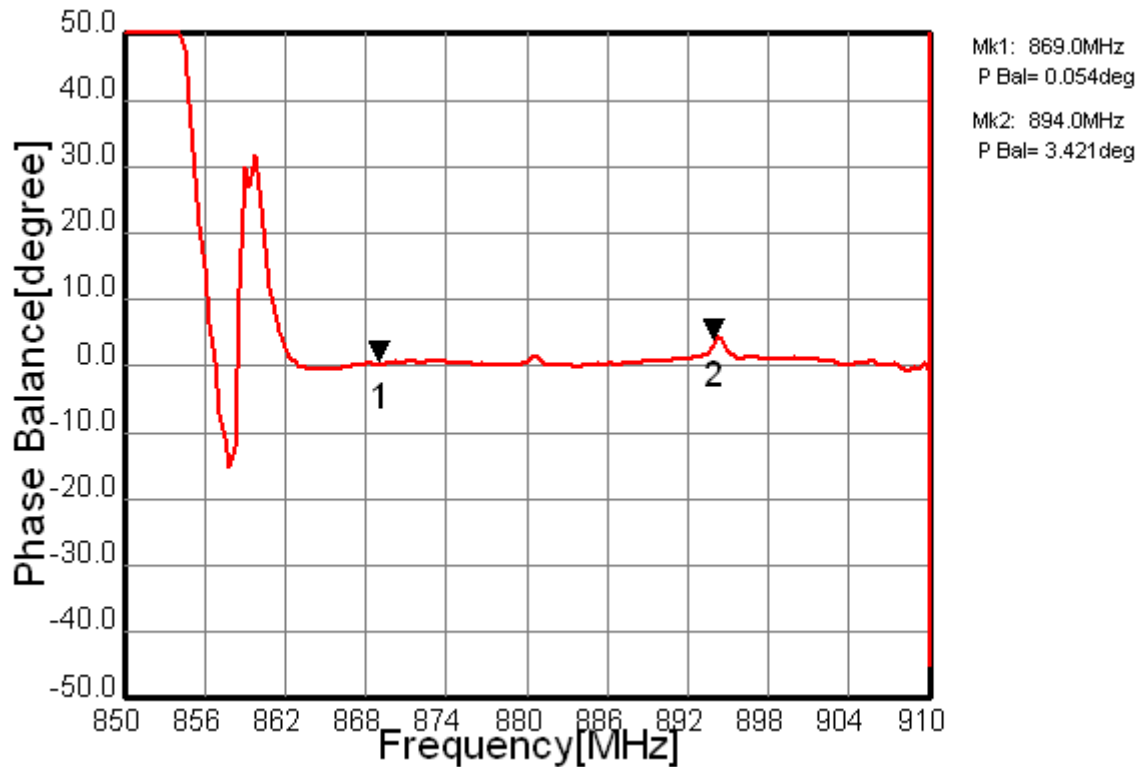


Fig.8 Phase Balance

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning category](#):

Click to view products by [Taiyo Yuden manufacturer](#):

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [10017-3](#) [TP-103-PIN](#) [BD1222J50200AHF](#)