



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA IV (AWS) Tx	Date	March 31, 2010
Part Number	FAR-F6KA-1G7400-D4DE	Version 2.0e	

Table 1. Electrical specifications

Passband: 1710 ~ 1770 MHz						
Item	Condition	Specification			Unit	Remarks
		Min.	Typ.	Max.		
Insertion Loss	1710~1770 MHz	-	1.5	2.7	dB	
Ripple	1710~1770 MHz	-	0.7	1.8	dB	
Absolute attenuation	800~1355 MHz	30	37	-	dB	
	1574~1577MHz	30	52	-	dB	
	1600~1680MHz	12	22	-	dB	
	1805~1880 MHz	17	24	-	dB	
	1930~1990 MHz	30	36	-	dB	
	2110~2170 MHz	30	44	-	dB	
VSWR (Input)	1710~1770 MHz	-	2.0	2.5	-	
VSWR (Output)	1710~1770 MHz	-	2.0	2.5	-	
Input Impedance	Unbalanced	50			Ohm	
Output Impedance	Unbalanced	50			Ohm	
Operating Temperature		-30 ~ +85			°C	
Device size		1.4typ.x1.0typ.x0.5max			mm	




MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA IV (AWS) Tx	Date	March 31, 2010
Part Number	FAR-F6KA-1G7400-D4DE	Version 2.0e	

Dimension

Device size: 1.4typ. x 1.0typ. x 0.5max.

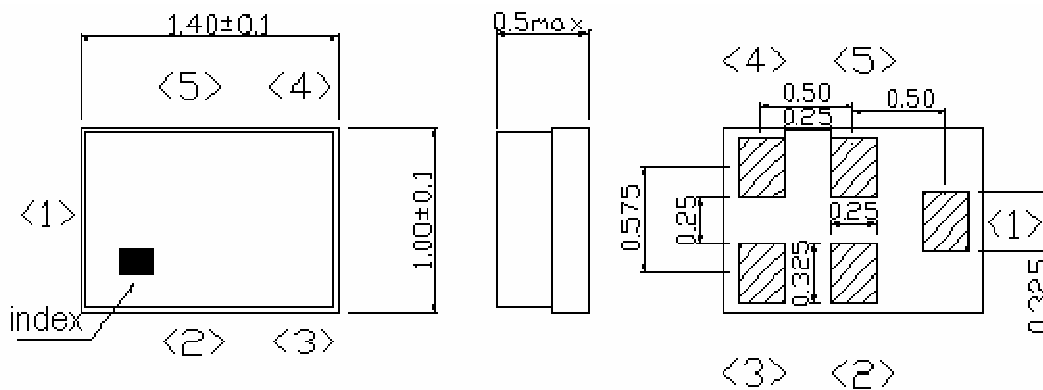


Unit: mm

Pin Configuration

Pin No.	Symbol	Function
1	IN	Unbalanced pin
2	GND	Ground
3	GND	Ground
4	OUT	Unbalanced pin
5	GND	Ground

Evaluation Circuit

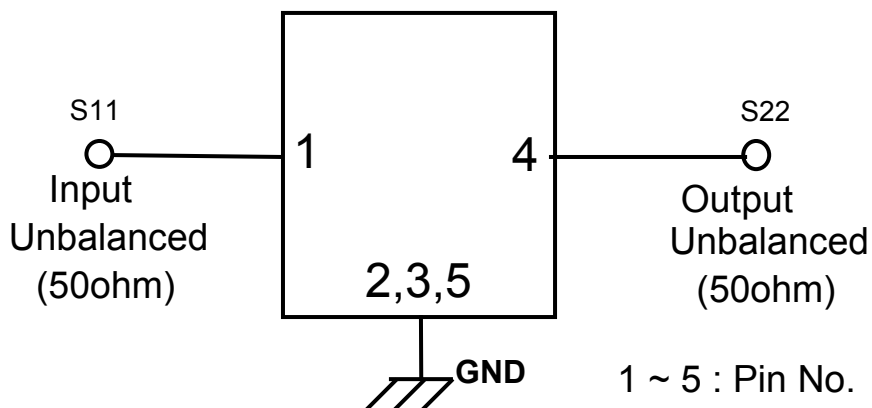



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA IV (AWS) Tx	Date	March 31, 2010
Part Number	FAR-F6KA-1G7400-D4DE	Version 2.0e	

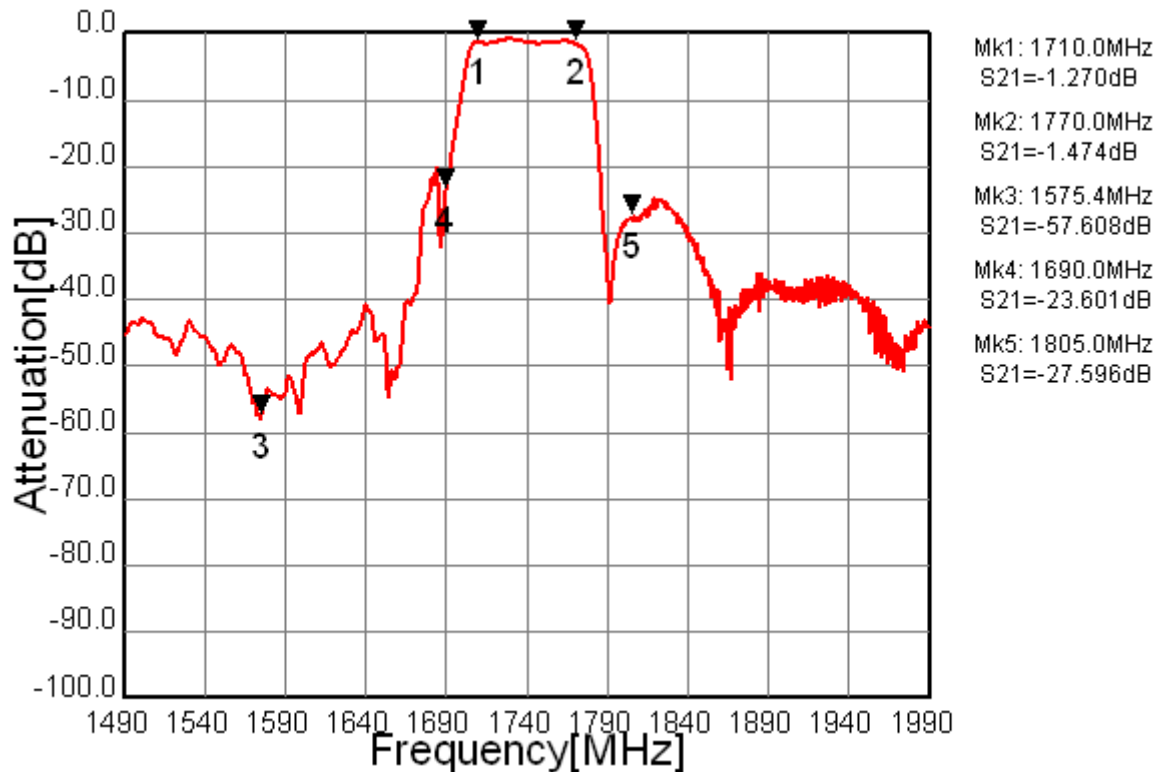


Fig.1 Pass-band Characteristics

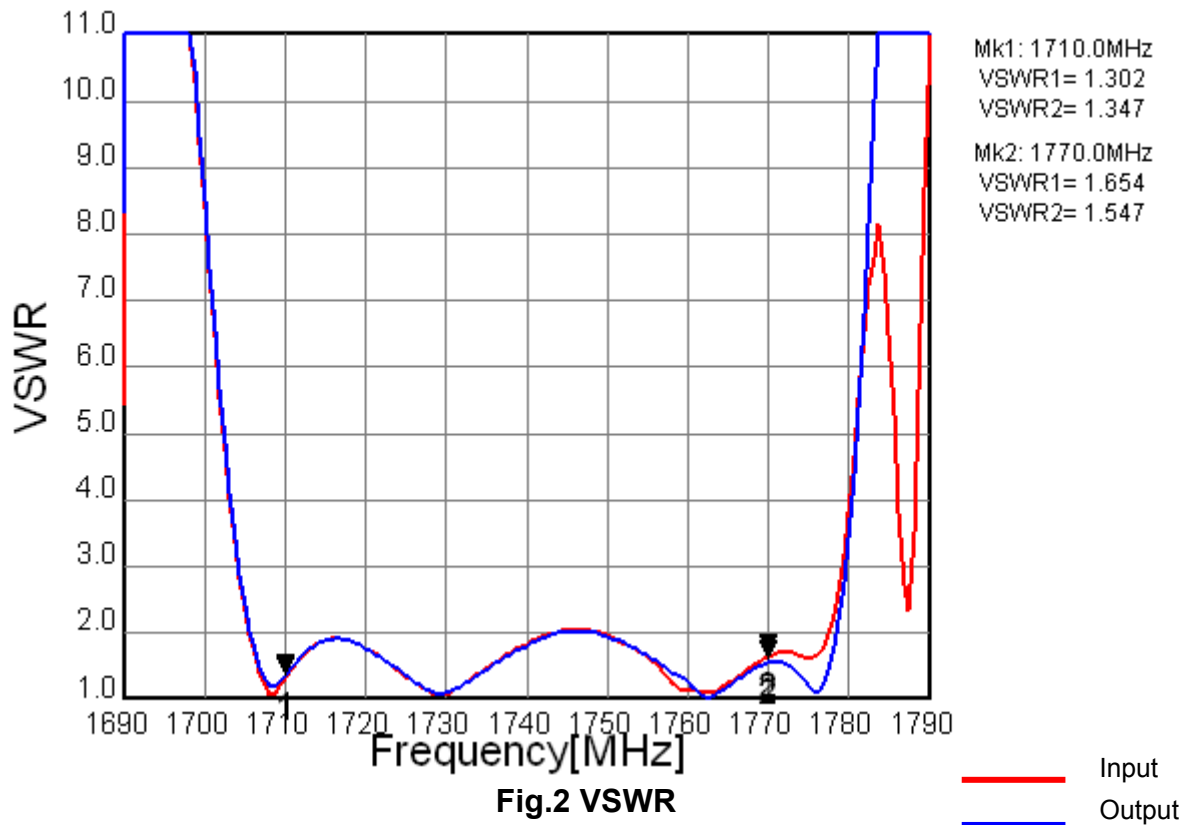


Fig.2 VSWR

— Input
— Output



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA IV (AWS) Tx	Date	March 31, 2010
Part Number	FAR-F6KA-1G7400-D4DE	Version 2.0e	

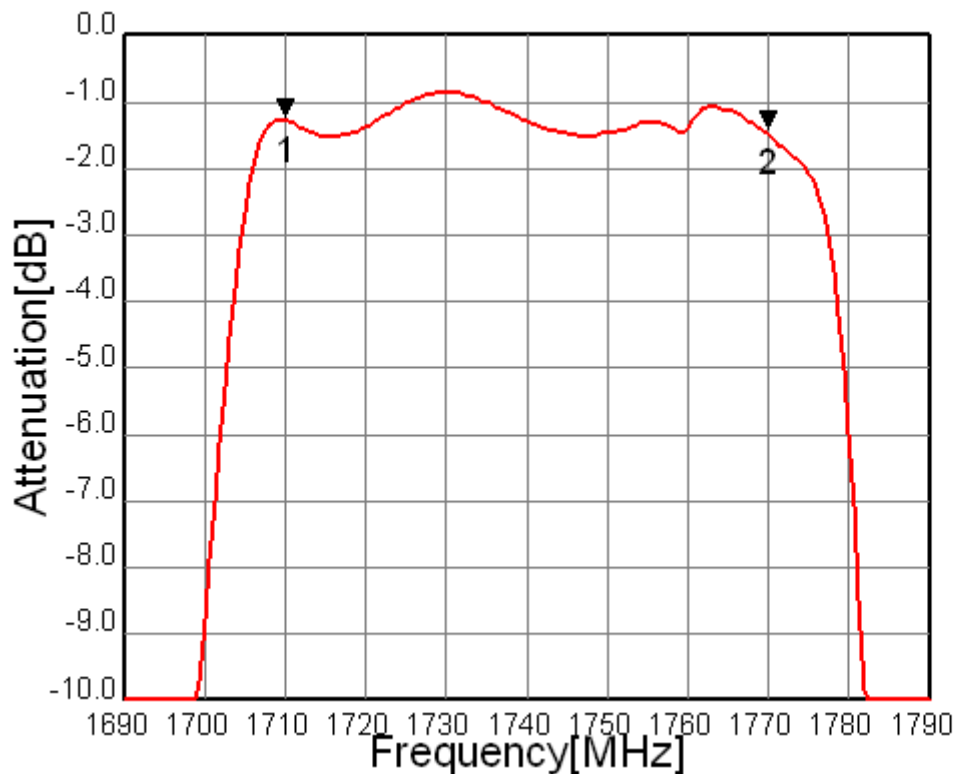


Fig.3 In-band Characteristics

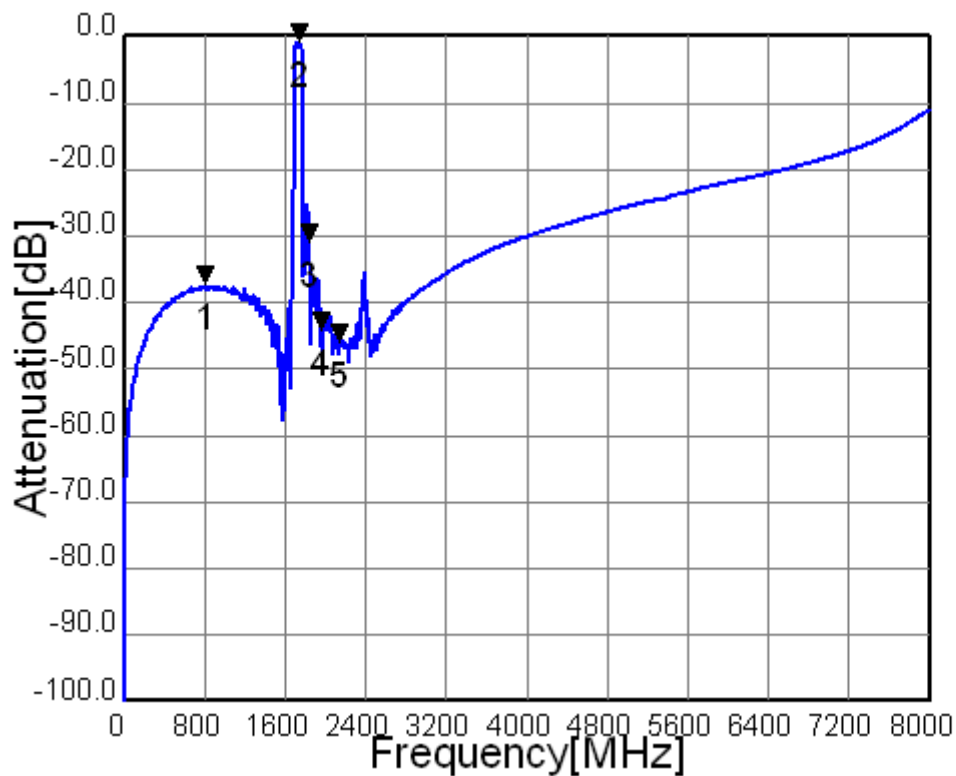


Fig.4 Wide-band Characteristics



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA IV (AWS) Tx	Date	March 31, 2010
Part Number	FAR-F6KA-1G7400-D4DE	Version 2.0e	

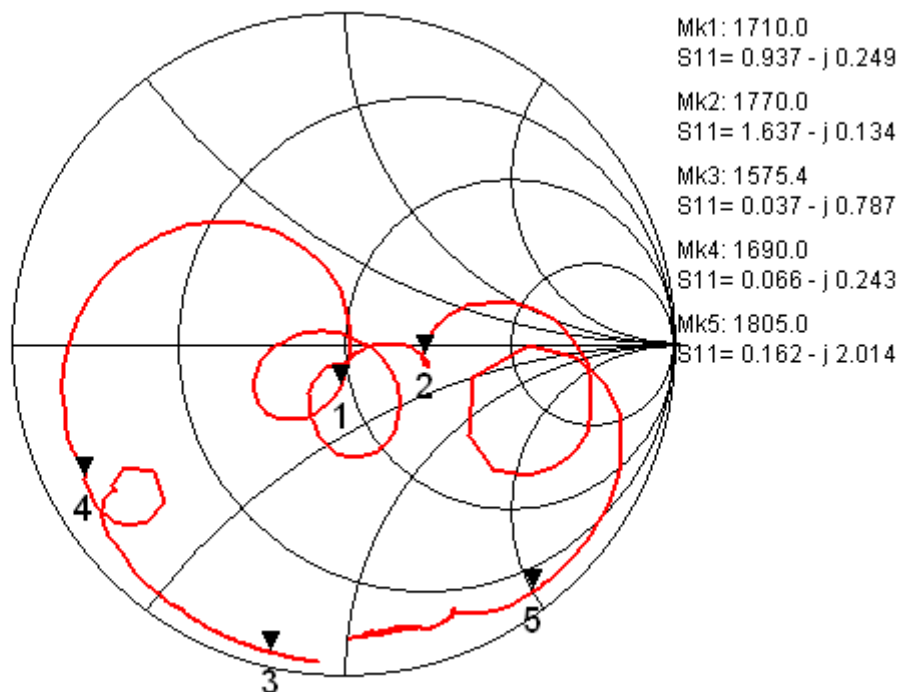


Fig.5 Input Impedance

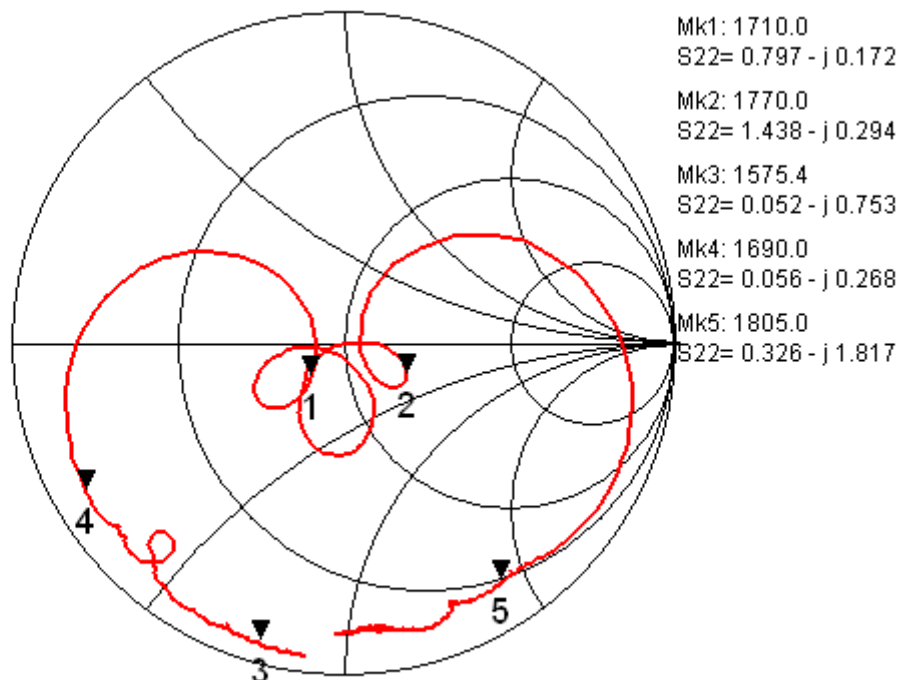


Fig.6 Output Impedance

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning category](#):

Click to view products by [Taiyo Yuden manufacturer](#):

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)
[FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#)
[C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#)
[LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#)
[PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-103-PIN](#) [BD1222J50200AHF](#)