

Notice for TAIYO YUDEN products

Please read this notice before using the TAIYO YUDEN products.

⚠ REMINDERS

■ Product Information in this Catalog

Product information in this catalog is as of January 2021. All of the contents specified herein and production status of the products listed in this catalog are subject to change without notice due to technical improvement of our products, etc. Therefore, please check for the latest information carefully before practical application or use of our products.

Please note that TAIYO YUDEN shall not be in any way responsible for any damages and defects in products or equipment incorporating our products, which are caused under the conditions other than those specified in this catalog or individual product specification sheets.

■ Approval of Product Specifications

Please contact TAIYO YUDEN for further details of product specifications as the individual product specification sheets are available. When using our products, please be sure to approve our product specifications or make a written agreement on the product specification with TAIYO YUDEN in advance.

■ Pre-Evaluation in the Actual Equipment and Conditions

Please conduct validation and verification of our products in actual conditions of mounting and operating environment before using our products.

■ Limited Application

1. Equipment Intended for Use

The products listed in this catalog are intended for general-purpose and standard use in general electronic equipment (e.g., AV equipment, OA equipment, home electric appliances, office equipment, information and communication equipment including, without limitation, mobile phone, and PC) and other equipment specified in this catalog or the individual product specification sheets.

TAIYO YUDEN has the line-up of the products intended for use in automotive electronic equipment, telecommunications infrastructure and industrial equipment, or medical devices classified as GHTF Classes A to C (Japan Classes I to III). Therefore, when using our products for these equipment, please check available applications specified in this catalog or the individual product specification sheets and use the corresponding products.

2. Equipment Requiring Inquiry

Please be sure to contact TAIYO YUDEN for further information before using the products listed in this catalog for the following equipment (excluding intended equipment as specified in this catalog or the individual product specification sheets) which may cause loss of human life, bodily injury, serious property damage and/or serious public impact due to a failure or defect of the products and/or malfunction attributed thereto.

- (1) Transportation equipment (automotive powertrain control system, train control system, and ship control system, etc.)
- (2) Traffic signal equipment
- (3) Disaster prevention equipment, crime prevention equipment
- (4) Medical devices classified as GHTF Class C (Japan Class III)
- (5) Highly public information network equipment, data-processing equipment (telephone exchange, and base station, etc.)
- (6) Any other equipment requiring high levels of quality and/or reliability equal to the equipment listed above

3. Equipment Prohibited for Use

Please do not incorporate our products into the following equipment requiring extremely high levels of safety and/or reliability.

- (1) Aerospace equipment (artificial satellite, rocket, etc.)
- (2) Aviation equipment *¹
- (3) Medical devices classified as GHTF Class D (Japan Class IV), implantable medical devices *²

- (4) Power generation control equipment (nuclear power, hydroelectric power, thermal power plant control system, etc.)
- (5) Undersea equipment (submarine repeating equipment, underwater work equipment, etc.)
- (6) Military equipment
- (7) Any other equipment requiring extremely high levels of safety and/or reliability equal to the equipment listed above

*Notes:

1. There is a possibility that our products can be used only for aviation equipment that does not directly affect the safe operation of aircraft (e.g., in-flight entertainment, cabin light, electric seat, cooking equipment) if such use meets requirements specified separately by TAIYO YUDEN. Please be sure to contact TAIYO YUDEN for further information before using our products for such aviation equipment.
2. Implantable medical devices contain not only internal unit which is implanted in a body, but also external unit which is connected to the internal unit.

4. Limitation of Liability

Please note that unless you obtain prior written consent of TAIYO YUDEN, TAIYO YUDEN shall not be in any way responsible for any damages incurred by you or third parties arising from use of the products listed in this catalog for any equipment that is not intended for use by TAIYO YUDEN, or any equipment requiring inquiry to TAIYO YUDEN or prohibited for use by TAIYO YUDEN as described above.

■ Safety Design

When using our products for high safety and/or reliability-required equipment or circuits, please fully perform safety and/or reliability evaluation. In addition, please install (i) systems equipped with a protection circuit and a protection device and/or (ii) systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault for a failsafe design to ensure safety.

■ Intellectual Property Rights

Information contained in this catalog is intended to convey examples of typical performances and/or applications of our products and is not intended to make any warranty with respect to the intellectual property rights or any other related rights of TAIYO YUDEN or any third parties nor grant any license under such rights.

■ Limited Warranty

Please note that the scope of warranty for our products is limited to the delivered our products themselves and TAIYO YUDEN shall not be in any way responsible for any damages resulting from a failure or defect in our products. Notwithstanding the foregoing, if there is a written agreement (e.g., supply and purchase agreement, quality assurance agreement) signed by TAIYO YUDEN and your company, TAIYO YUDEN will warrant our products in accordance with such agreement.

■ TAIYO YUDEN's Official Sales Channel

The contents of this catalog are applicable to our products which are purchased from our sales offices or authorized distributors (hereinafter "TAIYO YUDEN's official sales channel"). Please note that the contents of this catalog are not applicable to our products purchased from any seller other than TAIYO YUDEN's official sales channel.

■ Caution for Export


Some of our products listed in this catalog may require specific procedures for export according to "U.S. Export Administration Regulations", "Foreign Exchange and Foreign Trade Control Law" of Japan, and other applicable regulations. Should you have any questions on this matter, please contact our sales staff.

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

MULTILAYER CERAMIC DEVICES / DIPLEXERS / COUPLER / 2 BRANCH COUPLER

REFLOW

■ PARTS NUMBER



△=Blank space

①Series name

| Code | Series name |
|------|------------------------------------|
| FI | High frequency devices |
| FQ | High frequency devices – Fine Line |

②Electrode code

| Code | Electrode code |
|------|----------------|
| △ | With plating |

③Dimensions

| Code | Dimensions [mm] |
|------|-----------------|
| 212 | 2.0 × 1.25 |
| 168 | 1.6 × 0.8 |
| 105 | 1.0 × 0.5 |

④Special code

| Code | Special code |
|------|------------------|
| B | Band pass type |
| L | Low pass type |
| H | High pass type |
| D | Dual type |
| C | Balance type |
| P | Diplexer |
| W | 2 Branch Coupler |
| K | Coupler |

⑤Frequency

| Code (example) | Frequency [MHz] |
|----------------|-----------------|
| 2450 | 2400~2500 |
| 0620 | 470~770 |


⑥Spec code

| Code | Spec code |
|------|-----------------|
| 01~ | Individual spec |

⑦Packaging


| Code | Packaging |
|------|-----------|
| -T | Taping |

■ EXTERNAL DIMENSIONS / STANDARD QUANTITY

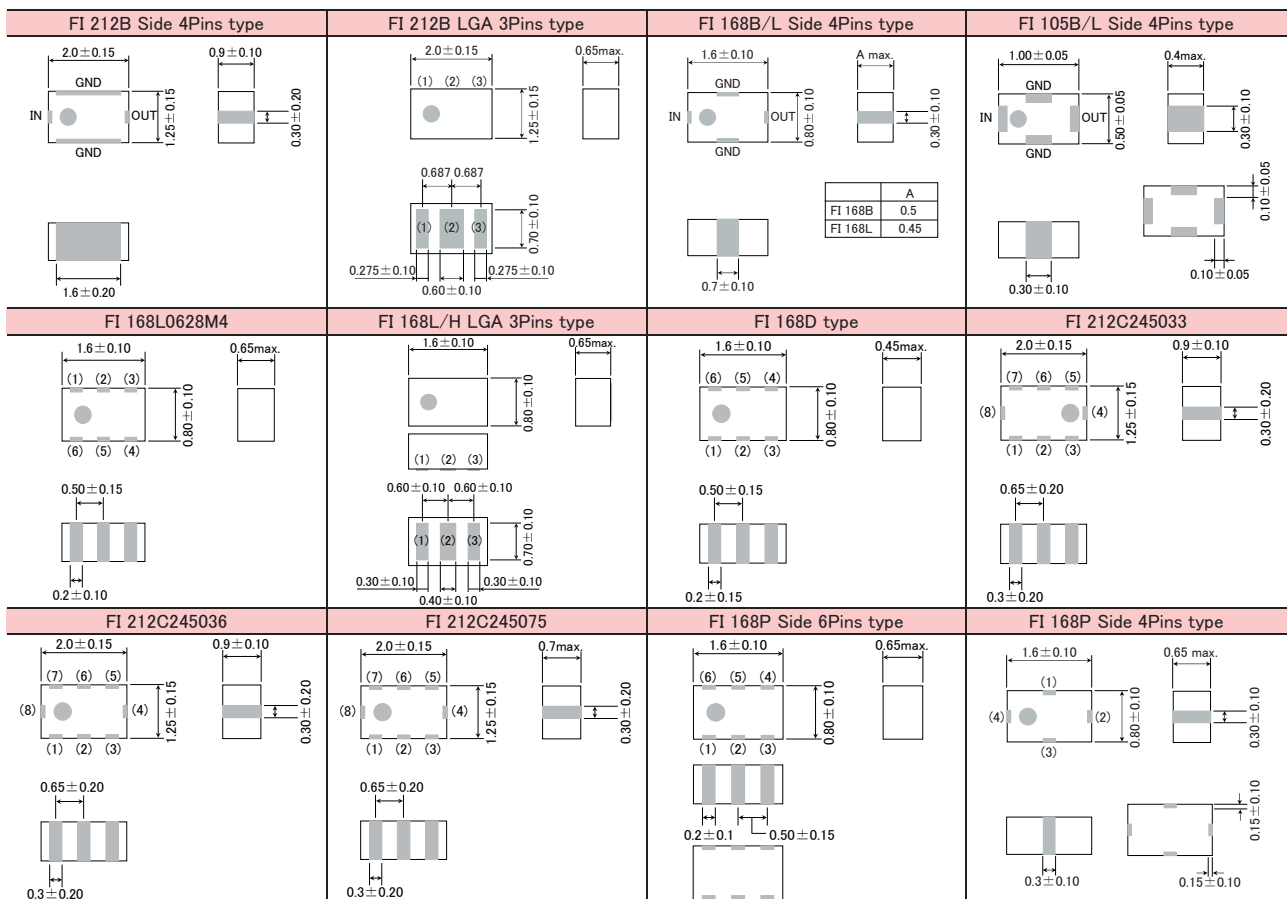

Unit: mm

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

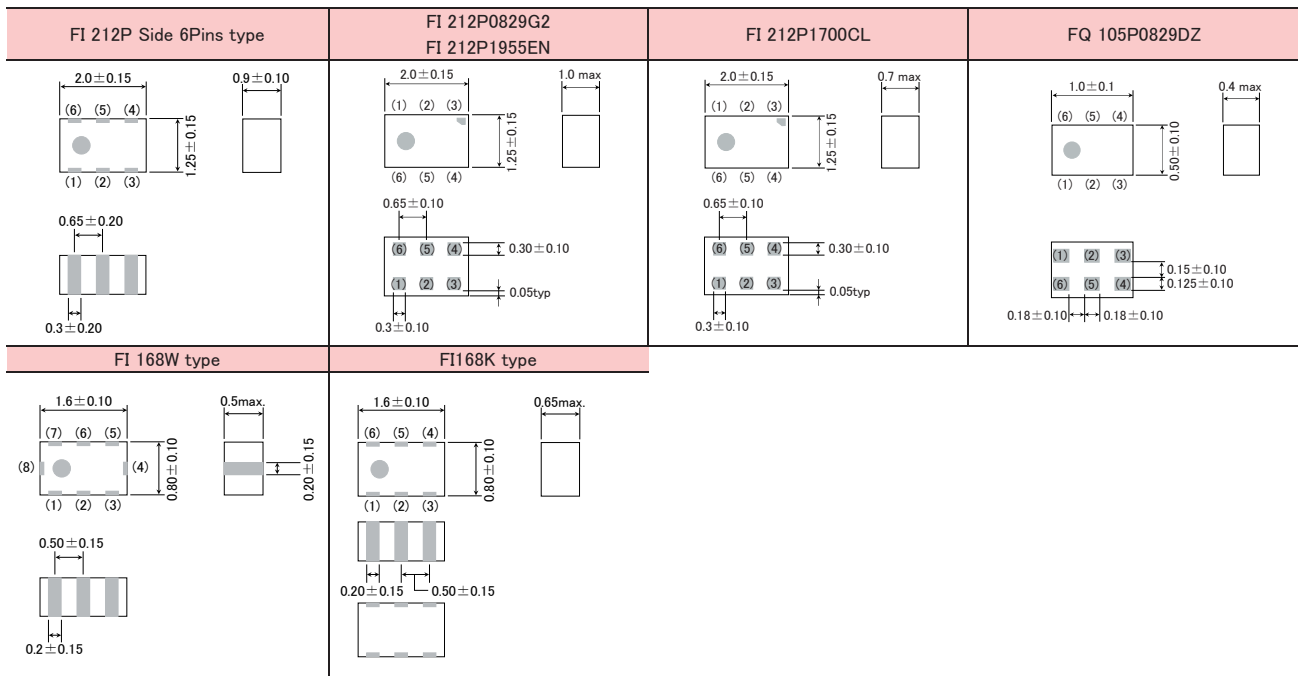

Unit: mm

| | FI 212B LGA 3Pins type | FI 168L0628M4 | FI 168L/H LGA 3Pins type | FI 168D087018 | FI 212C2450** | FI 168P245030 |
|-----|------------------------|---------------|--------------------------|---------------|---------------|---------------|
| (1) | RF IN/OUT | I/O Port | RF IN/OUT | High Band IN | Balanced | GND |
| (2) | GND | GND | GND | GND | GND | Common |
| (3) | RF IN/OUT | I/O Port | RF IN/OUT | Low Band IN | Balanced | GND |
| (4) | - | GND | - | Low Band OUT | GND | Low Band |
| (5) | - | GND | - | GND | Unbalance | GND |
| (6) | - | GND | - | High Band OUT | DC | High Band |
| (7) | - | - | - | - | NC | - |
| (8) | - | - | - | - | GND | - |

| | FI 168P157519 | FI 168P157525 | FI 212P082931 FI 212P082934 FI 212P089208 FI 212P085912 | FI 212P082935 FI 212P089213 FI 212P085909 | FQ105P0829GZ FI 212P0829G2 FI 212P1700CL | FI 212P1955EN |
|-----|---------------|---------------|--|---|--|---------------|
| (1) | GND | GND | Low Band | High Band | Low Band | GND |
| (2) | High Band | Low Band | GND | GND | GND | Common Port |
| (3) | Common | Common | High Band | Low Band | High Band | GND |
| (4) | Low Band | High Band | GND | GND | GND | High Band |
| (5) | - | - | Common Port | Common Port | Common Port | GND |
| (6) | - | - | GND | GND | GND | Low Band |
| (7) | - | - | - | - | - | - |
| (8) | - | - | - | - | - | - |

| | FI 168W type | FI 168K type |
|-----|--------------|--------------|
| (1) | RF1 IN/OUT | COUPLING |
| (2) | CPL2 RF1 | GND |
| (3) | CPL2 RF2 | ISOLATION |
| (4) | GND | RF OUT |
| (5) | RF2 OUT/IN | GND |
| (6) | CPL1 RF2 | RF IN |
| (7) | CPL1 RF1 | - |
| (8) | GND | - |

| Type | Standard quantity [pcs] |
|------|-------------------------|
| 212 | 3000~6000 |
| 168 | 4000~8000 |
| 105 | 10000 |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

PARTS NUMBER

● Multilayer device band pass type

| Applications | External dimensions [mm] | Part number | Notes |
|---------------------------|--------------------------|---------------|------------|
| 2.4GHz W-LAN / Bluetooth® | 2.0 × 1.25 × 1.0max. | FI 212B245026 | Side 4Pins |
| | 2.0 × 1.25 × 1.0max. | FI 212B245027 | Side 4Pins |
| | 1.6 × 0.8 × 0.5max. | FI 168B245001 | Side 4Pins |
| | 1.0 × 0.5 × 0.4max. | FI 105B245024 | Side 4Pins |
| 5G NR Sub 6 | 2.0 × 1.25 × 0.65max. | FI 212B3750EQ | LGA 3Pins |
| | 2.0 × 1.25 × 0.65max. | FI 212B4700DQ | LGA 3Pins |

● Multilayer device low pass type

| Applications | External dimensions [mm] | Part number | Notes |
|---------------------------|--------------------------|---------------|------------|
| Digital TV | 1.6 × 0.8 × 0.45max. | FI 168L062005 | Side 4Pins |
| 2.4GHz W-LAN / Bluetooth® | 1.0 × 0.5 × 0.4max. | FI 105L250014 | Side 4Pins |
| | 1.0 × 0.5 × 0.4max. | FI 105L186822 | Side 4Pins |
| Cellular | 1.0 × 0.5 × 0.4max. | FI 105L087038 | Side 4Pins |
| | 1.6 × 0.8 × 0.65max. | FI 168L0628M4 | Side 6Pins |
| | 1.6 × 0.8 × 0.65max. | FI 168L2200G9 | LGA 3Pins |
| | 1.6 × 0.8 × 0.65max. | FI 168L1681G6 | LGA 3Pins |

● Multilayer device high pass type

| Applications | External dimensions [mm] | Part number | Notes |
|--------------|--------------------------|---------------|---------------|
| Cellular | 1.6 × 0.8 × 0.65max. | FI 168H2593GG | LGA 3Pins |
| Other | 1.6 × 0.8 × 0.45max. | FI 168D087018 | Dual band LPF |

● Multilayer device balance type

| Applications | External dimensions [mm] | Part number | Notes |
|--------------|--------------------------|---------------|---------------------------------------|
| Bluetooth® | 2.0 × 1.25 × 1.0max. | FI 212C245033 | Conjugated match to CSR BC3 |
| | 2.0 × 1.25 × 1.0max. | FI 212C245036 | Conjugated match to CSR BC5 |
| | 2.0 × 1.25 × 0.7max. | FI 212C245075 | Conjugated match to CSR BC5FM, BC6ROM |

● Multilayer diplexer

| Applications | External dimensions [mm] | Part number | Notes |
|-----------------------|--------------------------|----------------------|---------------|
| W-LAN | 1.6 × 0.8 × 0.65max. | FI 168P245030 | Side 6Pins |
| | 2.0 × 1.25 × 1.0max. | FI 212P082931 | Side 6Pins |
| | 2.0 × 1.25 × 1.0max. | FI 212P0829G2 | LGA 6Pin |
| Cellular 4G, 5G NR | 2.0 × 1.25 × 1.0max. | FI 212P082934 | Side 6Pins |
| | 2.0 × 1.25 × 1.0max. | FI 212P082935 | Side 6Pins |
| | 2.0 × 1.25 × 1.0max. | FI 212P089208 | Side 6Pins |
| | 2.0 × 1.25 × 1.0max. | FI 212P089213 | Side 6Pins |
| | 2.0 × 1.25 × 1.0max. | FI 212P085909 | Side 6Pins |
| | 2.0 × 1.25 × 1.0max. | FI 212P085912 | Side 6Pins |
| | 1.0 × 0.5 × 0.4max. | FQ 105P0829DZ | LGA 6Pin |
| | 2.0 × 1.25 × 1.0max. | FI 212P1955EN | LGA 6Pin |
| | 2.0 × 1.25 × 0.7max. | FI 212P1700CL | LGA 6Pin |
| | GPS / 2.4GHz W-LAN | 1.6 × 0.8 × 0.65max. | FI 168P157519 |
| 1.6 × 0.8 × 0.65max. | | FI 168P157525 | Side 4Pins |


● Multilayer coupler

| Applications | External dimensions [mm] | Part number | Notes |
|--------------|--------------------------|---------------|------------|
| Cellular | 1.6 × 0.8 × 0.5max. | FI 168W1697B1 | Side 8Pins |
| | 1.6 × 0.8 × 0.5max. | FI 168K1687AA | Side 6Pins |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).


FI 212B245026

| | |
|-----------------------------|------------------------------|
| Pass band frequency | 2400 – 2500 MHz |
| Insertion loss at pass band | 2.6 dB max. (+25°C) |
| | 2.9 dB max. (-40~+85°C) |
| Ripple at pass band | 1.0 dB max. |
| V.S.W.R. at pass band | 2.0 max. |
| Attenuation | 40 dB min. (800 – 960 MHz) |
| | 30 dB min. (1710 – 1990 MHz) |
| | 25 dB min. (2110 – 2170 MHz) |
| | 30 dB min. (4800 – 5000 MHz) |
| | 30 dB min. (7200 – 7500 MHz) |
| Impedance | 50 Ω |

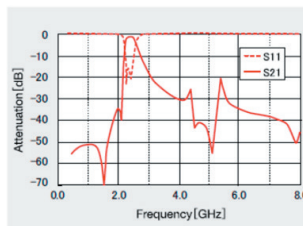


FI 212B245027

| | |
|-----------------------------|------------------------------|
| Pass band frequency | 2400 – 2500 MHz |
| Insertion loss at pass band | 1.4 dB max. (+25°C) |
| | 1.7 dB max. (-40~+85°C) |
| Ripple at pass band | 1.0 dB max. |
| V.S.W.R. at pass band | 2.0 max. |
| Attenuation | 30 dB min. (800 – 915 MHz) |
| | 30 dB min. (1710 – 1910 MHz) |
| | 6 dB min. (2110 – 2170 MHz) |
| | 20 dB min. (4800 – 5000 MHz) |
| | 20 dB min. (7200 – 7500 MHz) |

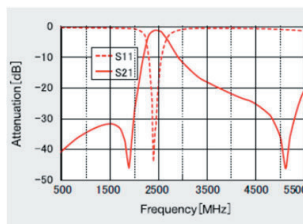


FI 168B245001

| | |
|-----------------------------|------------------------------|
| Pass band frequency | 2400 – 2500 MHz |
| Insertion loss at pass band | 2.2 dB max. (+25°C) |
| | 2.5 dB max. (-30~+85°C) |
| Ripple at pass band | 1.0 dB max. |
| V.S.W.R. at pass band | 2.1 max. |
| Attenuation | 25 dB min. (800 – 960 MHz) |
| | 25 dB min. (1710 – 1910 MHz) |
| | 20 dB min. (4800 – 5000 MHz) |
| | 20 dB min. (7200 – 7500 MHz) |
| | 20 dB min. (7200 – 7500 MHz) |
| Impedance | 50 Ω |

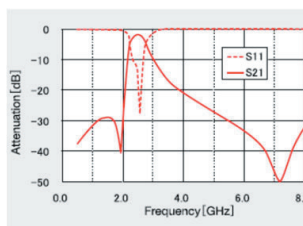

FI 105B245024

| | |
|-----------------------------|------------------------------|
| Pass band frequency | 2400 – 2500 MHz |
| Insertion loss at pass band | 3.0 dB max. (+25°C) |
| | 3.3 dB max. (-40~+85°C) |
| Ripple at pass band | 1.0 dB max. |
| V.S.W.R. at pass band | 2.2 max. |
| Attenuation | 25 dB min. (800 – 960 MHz) |
| | 22 dB min. (1710 – 1910 MHz) |
| | 20 dB min. (4800 – 5000 MHz) |
| | 20 dB min. (7200 – 7500 MHz) |

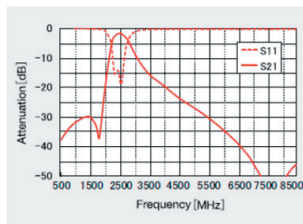

FI 212B3750EQ


| | |
|---------------------|-----------------|
| Pass band frequency | 3300 – 4200 MHz |
| Impedance | 50 Ω |

FI 212B4700DQ

| | |
|---------------------|-----------------|
| Pass band frequency | 4400 – 5000 MHz |
| Impedance | 50 Ω |

FI 168L062005


| | |
|---------------------------------|--|
| Pass band frequency | 470 – 770 MHz |
| Insertion loss at 470 – 600 MHz | 1.2 dB max. (+25°C) |
| | 1.3 dB max. (-30~+85°C) |
| Insertion loss at 600 – 710 MHz | 2.2 dB max. (+25°C) |
| | 2.4 dB max. (-30~+85°C) |
| Insertion loss at 710 – 770 MHz | 4.0 dB max. (+25°C) |
| | 4.4 dB max. (-30~+85°C) |
| Ripple at 470 – 710 MHz | 1.4 dB max. |
| V.S.W.R. | 2.0 max. (470 – 710 MHz) |
| | 2.5 max. (710 – 770 MHz) |
| Attenuation | 25 dB min. (888 – 925 MHz) (+25°C) |
| | 21 dB min. (888 – 925 MHz) (-30~+85°C) |
| | 25 dB min. (940 – 960 MHz) |
| | 27 dB min. (1429 – 1453 MHz) |
| | 26 dB min. (1920 – 1980 MHz) |
| | 26 dB min. (2400 – 2500 MHz) |
| Impedance | 50 Ω |

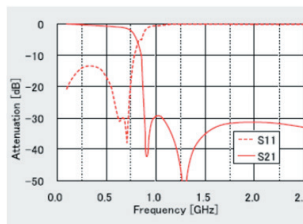

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).


FI 105L250014

| | |
|-----------------------------------|--|
| Pass band frequency | 2400 - 2500 MHz |
| Insertion loss at 2400 - 2500 MHz | 0.45 dB max. (+25°C) 0.55 dB max. (-40~+85°C) |
| V.S.W.R. at 2400 - 2500 MHz | 1.7 max. |
| Attenuation | 21 dB min. (4800 - 5000 MHz) 21 dB min. (7200 - 7500 MHz) |
| Impedance | 50 Ω |

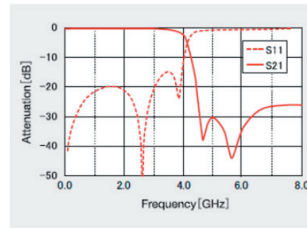


FI 105L186822

| | |
|---------------------------------|--|
| Pass band frequency | 824 - 915 MHz |
| Insertion loss at 824 - 915 MHz | 0.75 dB max. (-30~+85°C) |
| V.S.W.R. at 2400 - 2500 MHz | 1.5 max. |
| Attenuation | 23 dB min. (1648 - 1830 MHz) 23 dB min. (2472 - 2745 MHz) |
| Impedance | 50 Ω |

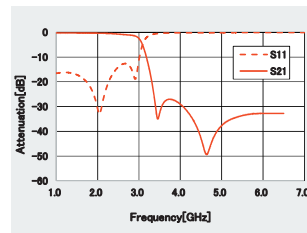


FI 105L087038

| | |
|---------------------------------|--|
| Pass band frequency | 824 - 915 MHz |
| Insertion loss at 824 - 915 MHz | 0.75 dB max. (-30~+85°C) |
| V.S.W.R. at 2400 - 2500 MHz | 1.5 max. |
| Attenuation | 23 dB min. (1648 - 1830 MHz) 23 dB min. (2472 - 2745 MHz) |
| Impedance | 50 Ω |

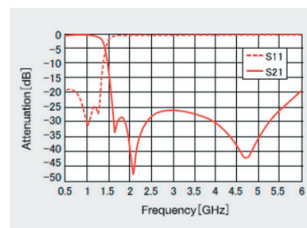


FI 168L0628M4

| | |
|-----------------------------|--|
| Pass band frequency | 470 - 787 MHz |
| Insertion loss at pass band | 0.5 dB max. (+25°C) 0.6 dB max. (-40~+90°C) |
| Ripple at pass band | - |
| V.S.W.R. at pass band | 2.0 max. |
| Attenuation | 26 dB min. (1429 - 1501 MHz) 30 dB min. (1565 - 1607 MHz) 35 dB min. (1570 - 1580 MHz) 18 dB min. (1920 - 1980 MHz) |
| Impedance | 50 Ω |

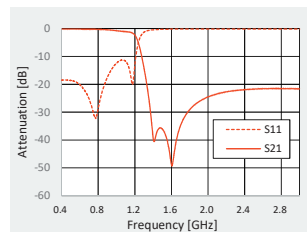


FI 168L2200G9

| | |
|-----------------------------------|---|
| Pass band frequency | 1700 - 2170 MHz 2170 - 2500 MHz 2500 - 2700 MHz |
| Insertion loss at 1700 - 2170 MHz | 0.5 dB max. (+25°C) 0.55 dB max. (-30~+85°C) |
| Insertion loss at 2170 - 2500 MHz | 0.65 dB max. (+25°C) 0.75 dB max. (-30~+85°C) |
| Insertion loss at 2500 - 2700 MHz | 0.9 dB max. (+25°C) 1.0 dB max. (-30~+85°C) |
| Return loss. at 1700 - 2700 MHz | 10 dB min. |
| Attenuation | 25 dB min. (3400 MHz) 22 dB min. (3400 - 5400 MHz) 20 dB min. (5400 - 8100 MHz) |
| Impedance | 50 Ω |

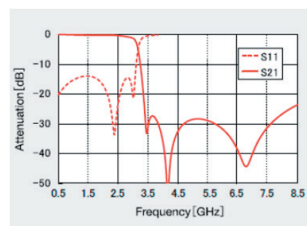

FI 168L1681G6


| | |
|--------------------------------|---|
| Pass band frequency | 617 - 2690 MHz |
| Return loss. at 617 - 2690 MHz | 0.5 dB max. (-40~+90°C) 10 dB min. |
| Attenuation | 35 dB min. (4950 - 6000 MHz) 35 dB min. (6000 - 7500 MHz) 35 dB min. (7500 - 8100 MHz) 35 dB min. (8100 - 10500 MHz) 27 dB min. (10500 - 12500 MHz) |
| Impedance | 50 Ω |

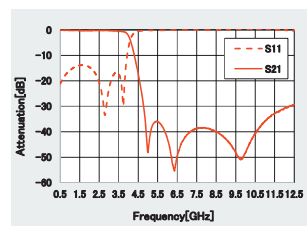

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

FI 168H2593GG



| | |
|-----------------------------------|------------------------------|
| Pass band frequency | 2496 – 2690 MHz |
| Insertion loss at 2500 – 2700 MHz | 0.9 dB max. (-40~+90°C) |
| Return loss. at 1700 – 2700 MHz | 15 dB min. |
| Attenuation | 25 dB min. (1710 – 1995 MHz) |
| Impedance | 50 Ω |

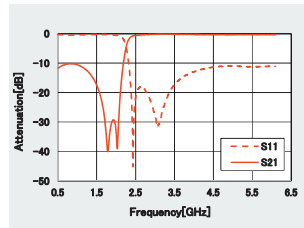

FI 168D087018

Low band

| | |
|---------------------------------|--|
| Pass band frequency | 824 – 915 MHz |
| Insertion loss at 824 – 915 MHz | 0.6 dB max. (-30~+85°C) |
| V.S.W.R. at 824 – 915 MHz | 1.5 max. |
| Attenuation | 25 dB min. (1648 – 1830 MHz) 25 dB min. (2472 – 2745 MHz) |
| Impedance | 50 Ω |

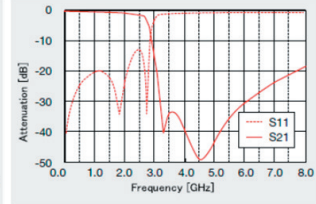
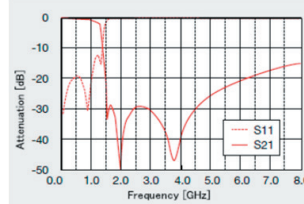


High band

| | |
|-----------------------------------|--|
| Pass band frequency | 1710 – 1910 MHz |
| Insertion loss at 1710 – 1910 MHz | 0.6 dB max. (-30~+85°C) |
| V.S.W.R. at 824 – 915 MHz | 1.5 max. |
| Attenuation | 25 dB min. (3420 – 3820 MHz) 25 dB min. (5130 – 5730 MHz) |
| Impedance | 50 Ω |
| Isolation | |
| In to In/Out to Out | 27 dB min. (824 – 915 MHz) 30 dB min. (1710 – 1910 MHz) |
| In to Out | 30 dB min. (824 – 915 MHz) 30 dB min. (1710 – 1910 MHz) |



FI 212C245033

| | |
|---------------------------------------|--|
| Pass band frequency | 2400 – 2500 MHz |
| Insertion loss at pass band | 2.7 dB (+25°C) 3.0 dB (-30~+85°C) |
| Ripple at pass band | 1.0 dB max. |
| Unbalanced port V.S.W.R. at pass band | 2.0 max. |
| Balanced port V.S.W.R. at pass band | 2.0 max. |
| Amplitude Imbalance at pass band | 2.0 dB max. |
| Phase Imbalance at pass band | 180 ± 10°C |
| Attenuation | 25 dB min. (880 – 960 MHz) 15 dB min. (1710 – 1990 MHz) 15 dB min. (1990 – 2170 MHz) 15 dB min. (4800 – 5000 MHz) |
| Unbalanced port Impedance | 50 Ω |
| Balanced port Impedance | Conjugated match to CSR BC3 |

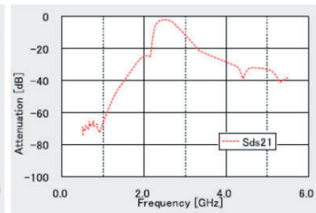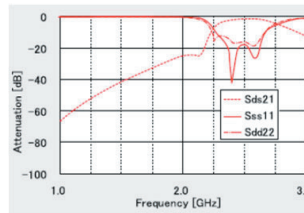



FI 212C245036

| | |
|---------------------------------------|--|
| Pass band frequency | 2400 – 2500 MHz |
| Insertion loss at pass band | 3.7 dB (+25°C) 4.0 dB (-30~+85°C) |
| Ripple at pass band | 1.0 dB max. |
| Unbalanced port V.S.W.R. at pass band | 2.0 max. |
| Balanced port V.S.W.R. at pass band | 2.0 max. |
| Amplitude Imbalance at pass band | 2.0 dB max. |
| Phase Imbalance at pass band | 180 ± 10°C |
| Attenuation | 35 dB min. (880 – 960 MHz) 20 dB min. (1710 – 1990 MHz) 15 dB min. (1990 – 2170 MHz) 20 dB min. (4800 – 5000 MHz) |
| Unbalanced port Impedance | 50 Ω |
| Balanced port Impedance | Conjugated match to CSR BC5 |

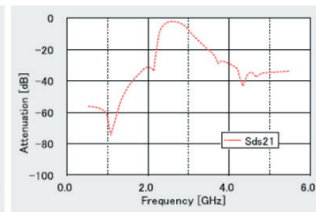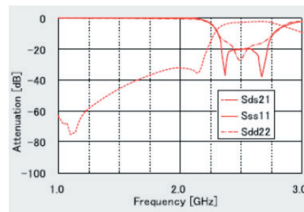

FI 212C245075


| | |
|---------------------------------------|--|
| Pass band frequency | 2400 – 2500 MHz |
| Insertion loss at pass band | 3.7 dB (+25°C) 4.0 dB (-30~+85°C) |
| Ripple at pass band | 1.0 dB max. |
| Unbalanced port V.S.W.R. at pass band | 2.2 max. |
| Balanced port V.S.W.R. at pass band | 2.2 max. |
| Amplitude Imbalance at pass band | 2.0 dB max. |
| Phase Imbalance at pass band | 180 ± 10°C |
| Attenuation | 40 dB min. (880 – 960 MHz) 18 dB min. (1710 – 1990 MHz) 12 dB min. (1990 – 2170 MHz) 30 dB min. (4800 – 5000 MHz) |
| Unbalanced port Impedance | 50 Ω |
| Balanced port Impedance | Conjugated match to CSR BC5FM, BC6ROM |

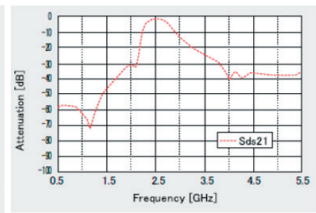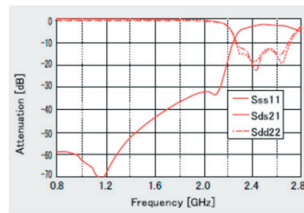

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).


FI 168P245030

| | |
|-------------------------------|--|
| Low band | |
| Pass band frequency 1 | 1558 - 1610 MHz |
| Pass band frequency 2 | 2400 - 2500 MHz |
| Insertion loss at Pass band 1 | 0.50 dB max. |
| Insertion loss at Pass band 2 | 0.60 dB max. |
| V.S.W.R. at Pass band | 2.0 dB max. |
| Attenuation | 24 dB min. (4800 - 4900 MHz) 26 dB min. (4900 - 6000 MHz) |
| Impedance | 50 Ω |
| High band | |
| Pass band frequency | 4900 - 5950 MHz |
| Insertion loss at Pass band | 0.80 dB max. |
| V.S.W.R. at Pass band | 2.0 dB max. |
| Attenuation | 32 dB min. (30 - 2700 MHz) |
| Impedance | 50 Ω |

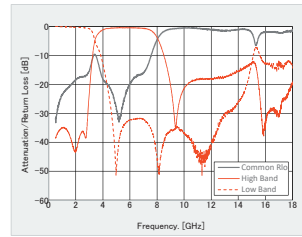

FI 212P082931


| | |
|---------------------------------|--|
| Low band | |
| Pass band frequency 1 | 698 - 894 MHz |
| Pass band frequency 2 | 880 - 960 MHz |
| Insertion loss at 698 - 894 MHz | 0.50 dB max. (+25°C) 0.60 dB max. (-40~+85°C) |
| Insertion loss at 880 - 960 MHz | 0.70 dB max. (+25°C) 0.80 dB max. (-40~+85°C) |
| V.S.W.R. at 698 - 894 MHz | 2.0 max. |
| V.S.W.R. at 880 - 960 MHz | 2.0 max. |
| Attenuation | 13 dB min. (1420 - 2690 MHz) |
| Impedance | 50 Ω |

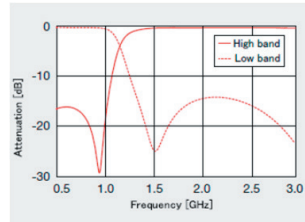

| | |
|-----------------------------------|--|
| High band | |
| Pass band frequency 1 | 1420 - 1520 MHz |
| Pass band frequency 2 | 1560 - 1610 MHz |
| Pass band frequency 3 | 1710 - 2170 MHz |
| Pass band frequency 4 | 2300 - 2690 MHz |
| Insertion loss at 1420 - 1520 MHz | 0.70 dB max. (+25°C) 0.80 dB max. (-40~+85°C) |
| Insertion loss at 1560 - 1610 MHz | 0.50 dB max. (+25°C) 0.60 dB max. (-40~+85°C) |
| Insertion loss at 1710 - 2170 MHz | 0.50 dB max. (+25°C) 0.60 dB max. (-40~+85°C) |
| Insertion loss at 2300 - 2690 MHz | 0.50 dB max. (+25°C) 0.60 dB max. (-40~+85°C) |
| V.S.W.R. at 1420 - 2690 MHz | 2.0 max. |
| Attenuation | 13 dB min. (698 - 960 MHz) |
| Impedance | 50 Ω |

FI 212P0829G2

| | |
|---------------------------------|--|
| Low band | |
| Pass band frequency | 698 - 960 MHz |
| Insertion loss at 698 - 960 MHz | 0.27 dB max. (+25°C) 0.32 dB max. (-40~+85°C) |
| V.S.W.R. at 698 - 960 MHz | 2.0 max. |
| Attenuation | 13 dB min. (1710 - 2690 MHz) |
| Impedance | 50 Ω |

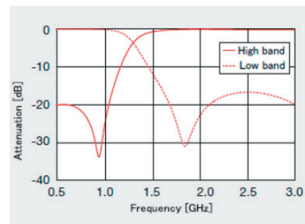

| | |
|-----------------------------------|--|
| High band | |
| Pass band frequency | 1710 - 2690 MHz |
| Insertion loss at 1710 - 2690 MHz | 0.45 dB max. (+25°C) 0.55 dB max. (-40~+85°C) |
| V.S.W.R. at 698 - 960 MHz | 2.0 max. |
| Attenuation | 19 dB min. (698 - 960 MHz) |
| Impedance | 50 Ω |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).


FI 212P082934

Low band

| | |
|---------------------------------|------------------------------|
| Pass band frequency | 698 – 960 MHz |
| Insertion loss at 698 – 960 MHz | 0.50 dB max. (-40~+85°C) |
| V.S.W.R. at 698 – 960 MHz | 1.4 max. |
| Attenuation | 15 dB min. (1554 – 1580 MHz) |
| | 25 dB min. (1710 – 2110 MHz) |
| | 25 dB min. (2110 – 2155 MHz) |
| | 25 dB min. (2155 – 2690 MHz) |
| | 12 dB min. (2155 – 7830 MHz) |
| Impedance | 50Ω |

High band

| | |
|-----------------------------------|----------------------------|
| Pass band frequency 1 | 1710 – 2170 MHz |
| Pass band frequency 2 | 2500 – 2690 MHz |
| Insertion loss at 1710 – 2170 MHz | 0.50 dB max. (-40~+85°C) |
| Insertion loss at 2500 – 2690 MHz | 0.55 dB max. (-40~+85°C) |
| V.S.W.R. at 1710 – 2170 MHz | 1.4 max. |
| V.S.W.R. at 2500 – 2690 MHz | 1.8 max. |
| Attenuation | 17 dB min. (0.3 – 960 MHz) |
| Impedance | 50Ω |

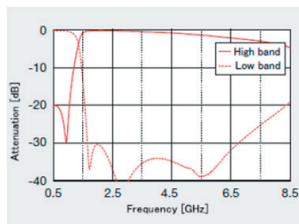


FI 212P082935

Low band

| | |
|---------------------------------|------------------------------|
| Pass band frequency | 698 – 960 MHz |
| Insertion loss at 698 – 960 MHz | 0.50 dB max. (-40~+85°C) |
| V.S.W.R. at 698 – 960 MHz | 1.4 max. |
| Attenuation | 15 dB min. (1554 – 1580 MHz) |
| | 25 dB min. (1710 – 2110 MHz) |
| | 25 dB min. (2110 – 2155 MHz) |
| | 25 dB min. (2155 – 2690 MHz) |
| | 12 dB min. (2155 – 7830 MHz) |
| Impedance | 50Ω |

High band

| | |
|-----------------------------------|----------------------------|
| Pass band frequency 1 | 1710 – 2170 MHz |
| Pass band frequency 2 | 2500 – 2690 MHz |
| Insertion loss at 1710 – 2170 MHz | 0.50 dB max. (-40~+85°C) |
| Insertion loss at 2500 – 2690 MHz | 0.55 dB max. (-40~+85°C) |
| V.S.W.R. at 1710 – 2170 MHz | 1.4 max. |
| V.S.W.R. at 2500 – 2690 MHz | 1.8 max. |
| Attenuation | 17 dB min. (0.3 – 960 MHz) |
| Impedance | 50Ω |

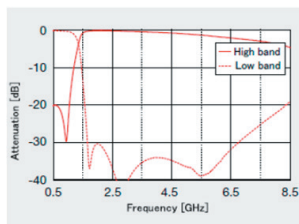


FI 212P089208

Low band

| | |
|---------------------------------|--|
| Pass band frequency | 698 – 960 MHz |
| Insertion loss at 698 – 960 MHz | 0.27 dB max. (+25°C) 0.32 dB max. (-40~+85°C) |
| V.S.W.R. at 698 – 960 MHz | 2.0 max. |
| Attenuation | 13 dB min. (1710 – 2170 MHz) |
| Impedance | 50Ω |

High band

| | |
|-----------------------------------|--|
| Pass band frequency | 1710 – 2170 MHz |
| Insertion loss at 1710 – 2170 MHz | 0.45 dB max. (+25°C) 0.55 dB max. (-40~+85°C) |
| V.S.W.R. at 698 – 960 MHz | 2.0 max. |
| Attenuation | 19 dB min. (698 – 960 MHz) |
| Impedance | 50Ω |

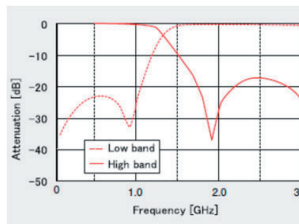


FI 212P089213

Low band

| | |
|---------------------------------|--|
| Pass band frequency | 698 – 960 MHz |
| Insertion loss at 698 – 960 MHz | 0.27 dB max. (+25°C) 0.32 dB max. (-40~+85°C) |
| V.S.W.R. at 698 – 960 MHz | 2.0 max. |
| Attenuation | 13 dB min. (1710 – 2170 MHz) |
| Impedance | 50Ω |

High band

| | |
|-----------------------------------|--|
| Pass band frequency | 1710 – 2170 MHz |
| Insertion loss at 1710 – 2170 MHz | 0.45 dB max. (+25°C) 0.55 dB max. (-40~+85°C) |
| V.S.W.R. at 698 – 960 MHz | 2.0 max. |
| Attenuation | 19 dB min. (698 – 960 MHz) |
| Impedance | 50Ω |

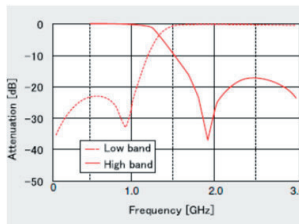


► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

ELECTRICAL CHARACTERISTICS / TYPICAL CHARACTERISTICS


FI 212P085909

| | |
|-----------------------------------|--|
| Low band | |
| Pass band frequency | 698 - 960 MHz |
| Insertion loss at 698 - 960 MHz | 0.70 dB max. (+25°C) 0.75 dB max. (-30~+85°C) |
| V.S.W.R. at 698 - 960 MHz | 1.6 max. |
| Attenuation | 19 dB min. (1558 - 1570 MHz) 20 dB min. (1570 - 1580 MHz) 19 dB min. (1580 - 1610 MHz) |
| Impedance | 50 Ω |
| High band | |
| Pass band frequency 1 | 1558 - 1570 MHz |
| Pass band frequency 2 | 1570 - 1580 MHz |
| Pass band frequency 3 | 1580 - 1610 MHz |
| Insertion loss at 1558 - 1570 MHz | 0.75 dB max. (+25°C) 0.85 dB max. (-30~+85°C) |
| Insertion loss at 1570 - 1580 MHz | 0.70 dB max. (+25°C) 0.80 dB max. (-30~+85°C) |
| Insertion loss at 1580 - 1610 MHz | 0.70 dB max. (+25°C) 0.80 dB max. (-30~+85°C) |
| V.S.W.R. at 1558 - 1570 MHz | 1.6 max. |
| V.S.W.R. at 1570 - 1580 MHz | 1.6 max. |
| V.S.W.R. at 1580 - 1610 MHz | 1.6 max. |
| Attenuation | 35 dB min. (698 - 824 MHz) 42 dB min. (824 - 894 MHz) 25 dB min. (894 - 960 MHz) |
| Impedance | 50 Ω |

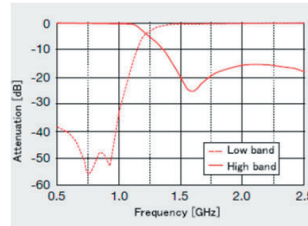

FI 212P085912

| | |
|-----------------------------------|--|
| Low band | |
| Pass band frequency | 698 - 960 MHz |
| Insertion loss at 698 - 960 MHz | 0.70 dB max. (+25°C) 0.75 dB max. (-30~+85°C) |
| V.S.W.R. at 698 - 960 MHz | 1.6 max. |
| Attenuation | 19 dB min. (1558 - 1570 MHz) 20 dB min. (1570 - 1580 MHz) 19 dB min. (1580 - 1610 MHz) |
| Impedance | 50 Ω |
| High band | |
| Pass band frequency 1 | 1558 - 1570 MHz |
| Pass band frequency 2 | 1570 - 1580 MHz |
| Pass band frequency 3 | 1580 - 1610 MHz |
| Insertion loss at 1558 - 1570 MHz | 0.75 dB max. (+25°C) 0.85 dB max. (-30~+85°C) |
| Insertion loss at 1570 - 1580 MHz | 0.70 dB max. (+25°C) 0.80 dB max. (-30~+85°C) |
| Insertion loss at 1580 - 1610 MHz | 0.70 dB max. (+25°C) 0.80 dB max. (-30~+85°C) |
| V.S.W.R. at 1558 - 1570 MHz | 1.6 max. |
| V.S.W.R. at 1570 - 1580 MHz | 1.6 max. |
| V.S.W.R. at 1580 - 1610 MHz | 1.6 max. |
| Attenuation | 35 dB min. (698 - 824 MHz) 42 dB min. (824 - 894 MHz) 25 dB min. (894 - 960 MHz) |
| Impedance | 50 Ω |

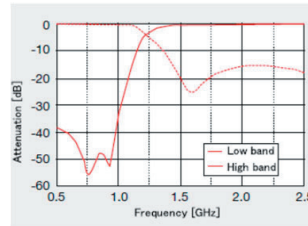

FQ 105P0829DZ

| | |
|-----------------------|-----------------|
| Pass band frequency 1 | 699 - 960 MHz |
| Pass band frequency 2 | 1710 - 2690 MHz |
| Impedance | 50 Ω |

FI 212P1955EN

| | |
|-----------------------|-----------------|
| Pass band frequency 1 | 1427 - 2200 MHz |
| Pass band frequency 2 | 2496 - 5000 MHz |
| Impedance | 50 Ω |

FI 212P1700CL

| | |
|-----------------------|-----------------|
| Pass band frequency 1 | 699 - 2690 MHz |
| Pass band frequency 2 | 3300 - 5000 MHz |
| Impedance | 50 Ω |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).


FI 168P157519

Low band

| | |
|-----------------------------------|------------------------------|
| Pass band frequency 0 | 824 – 960 MHz |
| Pass band frequency 1 | 1558 – 1585 MHz |
| Pass band frequency 2 | 1585 – 1610 MHz |
| Insertion loss at 824 – 960 MHz | 0.50 dB max. (+25°C) |
| | 0.60 dB max. (-40~+85°C) |
| Insertion loss at 1558 – 1585 MHz | 0.40 dB max. (+25°C) |
| | 0.50 dB max. (-40~+85°C) |
| Insertion loss at 1585 – 1610 MHz | 0.45 dB max. (+25°C) |
| | 0.55 dB max. (-40~+85°C) |
| V.S.W.R. at 824 – 960 MHz | 2.0 max. |
| V.S.W.R. at 1558 – 1585 MHz | 2.0 max. |
| V.S.W.R. at 1585 – 1610 MHz | 2.0 max. |
| Attenuation | 13 dB min. (2400 – 2500 MHz) |
| Impedance | 50 Ω |

High band

| | |
|-----------------------------------|------------------------------|
| Pass band frequency | 2400 – 2500 MHz |
| Insertion loss at 2400 – 2500 MHz | 0.60 dB max. (+25°C) |
| | 0.70 dB max. (-40~+85°C) |
| V.S.W.R. at 2400 – 2500 MHz | 2.0 max. |
| Attenuation | 12 dB min. (824 – 960 MHz) |
| | 23 dB min. (1558 – 1585 MHz) |
| | 20 dB min. (1585 – 1610 MHz) |
| Impedance | 50 Ω |

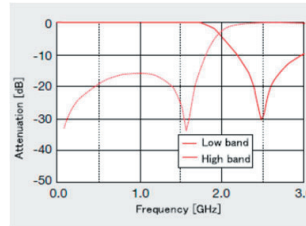


FI 168P157525

Low band

| | |
|-----------------------------------|------------------------------|
| Pass band frequency 0 | 824 – 960 MHz |
| Pass band frequency 1 | 1558 – 1585 MHz |
| Pass band frequency 2 | 1585 – 1610 MHz |
| Insertion loss at 824 – 960 MHz | 0.50 dB max. (+25°C) |
| | 0.60 dB max. (-40~+85°C) |
| Insertion loss at 1558 – 1585 MHz | 0.40 dB max. (+25°C) |
| | 0.50 dB max. (-40~+85°C) |
| Insertion loss at 1585 – 1610 MHz | 0.45 dB max. (+25°C) |
| | 0.55 dB max. (-40~+85°C) |
| V.S.W.R. at 824 – 960 MHz | 2.0 max. |
| V.S.W.R. at 1558 – 1585 MHz | 2.0 max. |
| V.S.W.R. at 1585 – 1610 MHz | 2.0 max. |
| Attenuation | 13 dB min. (2400 – 2500 MHz) |
| Impedance | 50 Ω |

High band

| | |
|-----------------------------------|------------------------------|
| Pass band frequency | 2400 – 2500 MHz |
| Insertion loss at 2400 – 2500 MHz | 0.60 dB max. (+25°C) |
| | 0.70 dB max. (-40~+85°C) |
| V.S.W.R. at 2400 – 2500 MHz | 2.0 max. |
| Attenuation | 12 dB min. (824 – 960 MHz) |
| | 23 dB min. (1558 – 1585 MHz) |
| | 12 dB min. (1585 – 1610 MHz) |
| Impedance | 50 Ω |

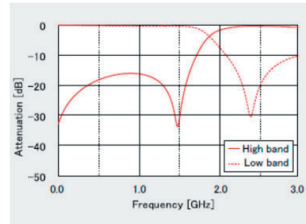


FI 168W1697B1

| | |
|--|-------------------------------|
| Pass band frequency | 699 – 2690 MHz |
| Insertion loss at 699 – 960 MHz | 0.15 dB max. (+35~+85°C) |
| | 0.1 dB max. (+15~+35°C) |
| | 0.1 dB max. (-20~+15°C) |
| Insertion loss at 1000 – 2025 MHz | 0.25 dB max. (+35~+85°C) |
| | 0.2 dB max. (+15~+35°C) |
| | 0.2 dB max. (-20~+15°C) |
| Insertion loss at 2110 – 2690 MHz | 0.38 dB max. (+35~+85°C) |
| | 0.28 dB max. (+15~+35°C) |
| | 0.28 dB max. (-20~+15°C) |
| Ripple | 0.1 dB max. (699 – 746 MHz) |
| | 0.1 dB max. (791 – 862 MHz) |
| | 0.1 dB max. (824 – 960 MHz) |
| | 0.1 dB max. (1710 – 2170 MHz) |
| | 0.1 dB max. (2500 – 2690 MHz) |
| RF Coupling | 28.1~29.5 dB (699MHz) |
| | 25.8~27.2 dB (915MHz) |
| | 20.7~22.1 dB (1710MHz) |
| | 19.9~21.3 dB (1880MHz) |
| | 19.3~20.7 dB (2025MHz) |
| | 18.3~19.7 dB (2300MHz) |
| | 17.1~18.5 dB (2690MHz) |
| Coupling ration mismatch between Coupler branch 1 and Coupler branch 2 | -1~1 dB (699 – 2690 MHz) |
| Directivity | 18 dB min. (699 – 2690 MHz) |
| Impedance | 50 Ω |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

FI 168K1687AA

| | |
|------------------------------------|-----------------------------|
| Pass band frequency | 698 - 2690 MHz |
| Insertion loss at 699 - 2690 MHz | 0.25 dB max. (+25°C) |
| | 0.30 dB max. (-40~+85°C) |
| S11 Coupled port at 698 - 2690 MHz | 0.25 dB max. (+25°C) |
| RF Coupling | 26.5~29.0 dB (698MHz) |
| | 24.0~27.0 dB (915MHz) |
| | 21.5~24.5 dB (1710MHz) |
| | 21.5~24.5 dB (2025MHz) |
| | 21.5~24.5 dB (2300MHz) |
| | 21.5~25.5 dB (2690MHz) |
| Isolation | 35 dB min. (698 - 2690 MHz) |
| Impedance | 50 Ω |

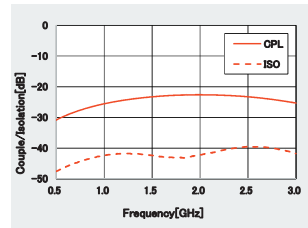

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

MULTILAYER CERAMIC DEVICES / DIPLEXERS / COUPLER / 2 BRANCH COUPLER


PACKAGING

① Minimum Quantity


| Type | Embossed tape / Paper tape [pcs] |
|------------|----------------------------------|
| 212B-1.0 | 3000 |
| 212C | |
| 212P-1.0 | |
| 168B | 4000 |
| 168L | |
| 168D | |
| 168P | |
| 168L-G | 5000 |
| 168H | |
| 168P245030 | |
| 212B-0.65 | |
| 212P-0.7 | |
| 168W | 8000 |
| 168K | |
| 105B | |
| 105L | 10000 |
| 105P | |

② Tape Material


● Embossed Tape

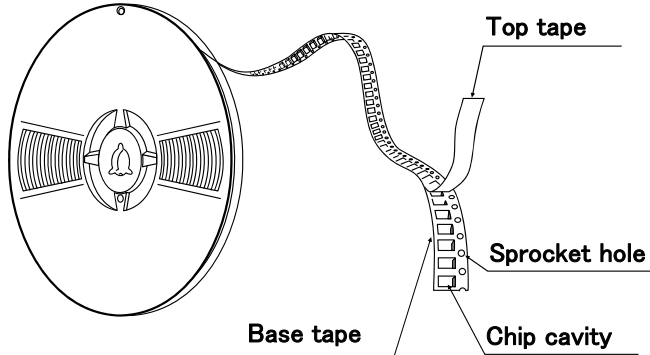

● Card Board Carrier Tape

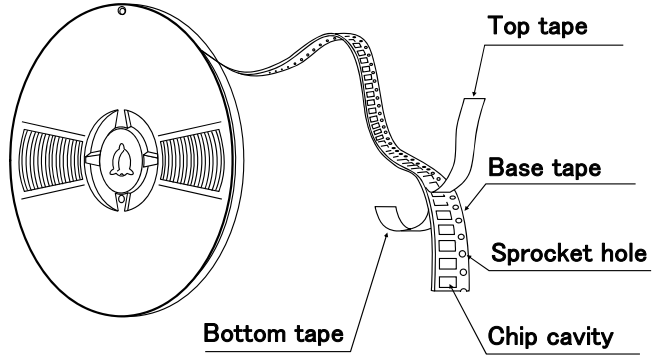



Chip Filled

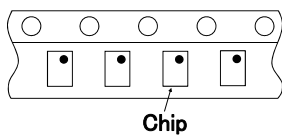

③ Taping Dimensions

● Embossed tape 0.315 inches wide

Unit: mm (inch)

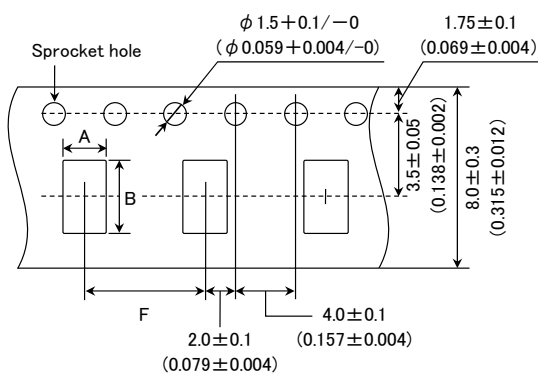


▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| Type | Chip cavity | | Insertion Pitch | Tape Thickness max. | |
|-----------|---------------------------|---------------------------|--------------------------|-------------------------|----------------|
| | A | B | F | K | T |
| 212B-1.0 | 1.45±0.2 (0.057±0.008) | 2.25±0.2 (0.089±0.008) | 4.0±0.1 (0.157±0.004) | 1.1 Max (0.043 Max) | 0.3 (0.012) |
| 212B-0.65 | 1.45±0.2 (0.057±0.008) | 2.25±0.2 (0.089±0.008) | 4.0±0.1 (0.157±0.004) | 0.95 Max (0.037 Max) | 0.3 (0.012) |
| 212C | 1.45±0.2 (0.057±0.008) | 2.25±0.2 (0.089±0.008) | 4.0±0.1 (0.157±0.004) | 1.1 Max (0.043 Max) | 0.3 (0.012) |
| 212C-0.7 | 1.45±0.2 (0.057±0.008) | 2.25±0.2 (0.089±0.008) | 4.0±0.1 (0.157±0.004) | 0.95 Max (0.037 Max) | 0.3 (0.012) |
| 212P-1.0 | 1.45±0.2 (0.057±0.008) | 2.25±0.2 (0.089±0.008) | 4.0±0.1 (0.157±0.004) | 1.1 Max (0.043 Max) | 0.3 (0.012) |
| 212P-0.7 | 1.45±0.2 (0.057±0.008) | 2.25±0.2 (0.089±0.008) | 4.0±0.1 (0.157±0.004) | 0.95 Max (0.037 Max) | 0.3 (0.012) |

Unit : mm (inch)

● Paper tape 0.315 inches wide

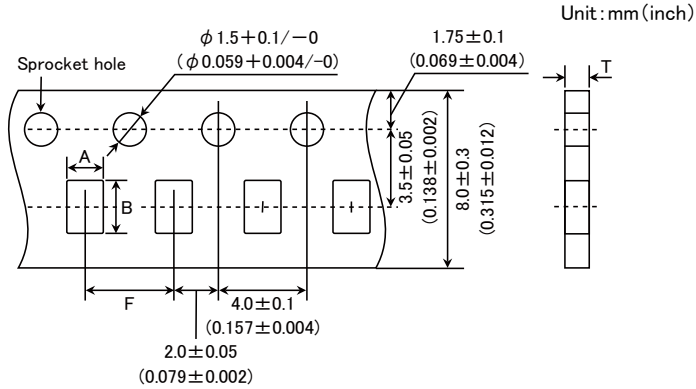


| Type | Chip cavity | | Insertion Pitch | Tape Thickness max. |
|--------|----------------------------|----------------------------|---------------------------|---------------------|
| | A | B | F | T |
| 168B | 1.00±0.05 (0.039±0.002) | 1.80±0.05 (0.071±0.002) | 4.0±0.1 (0.157±0.004) | 0.55 (0.022) |
| 168L | 1.00±0.05 (0.039±0.002) | 1.80±0.05 (0.071±0.002) | 4.0±0.1 (0.157±0.004) | 0.55 (0.022) |
| 168W | 1.00±0.05 (0.039±0.002) | 1.80±0.05 (0.071±0.002) | 4.0±0.1 (0.157±0.004) | 0.55 (0.022) |
| 168K | 1.00±0.05 (0.039±0.002) | 1.80±0.05 (0.071±0.002) | 4.0±0.1 (0.157±0.004) | 0.80 (0.031) |
| 168D | 1.00±0.05 (0.039±0.002) | 1.80±0.05 (0.071±0.002) | 4.0±0.1 (0.157±0.004) | 0.55 (0.022) |
| 168P | 0.95±0.05 (0.037±0.002) | 1.80±0.05 (0.071±0.002) | 4.0±0.1 (0.157±0.004) | 0.80 (0.031) |
| 168L-G | 0.95±0.05 (0.037±0.002) | 1.80±0.05 (0.071±0.002) | 4.0±0.1 (0.157±0.004) | 0.80 (0.031) |
| 168H | 0.95±0.05 (0.037±0.002) | 1.80±0.05 (0.071±0.002) | 4.0±0.1 (0.157±0.004) | 0.80 (0.031) |
| 105B | 0.62±0.03 (0.024±0.001) | 1.12±0.03 (0.044±0.001) | 2.0±0.05 (0.079±0.002) | 0.45 (0.018) |
| 105L | 0.62±0.03 (0.024±0.001) | 1.12±0.03 (0.044±0.001) | 2.0±0.05 (0.079±0.002) | 0.45 (0.018) |
| 105P | 0.62±0.03 (0.024±0.001) | 1.12±0.03 (0.044±0.001) | 2.0±0.05 (0.079±0.002) | 0.45 (0.018) |


Unit: mm (inch)

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

④ Leader and Blank Portion

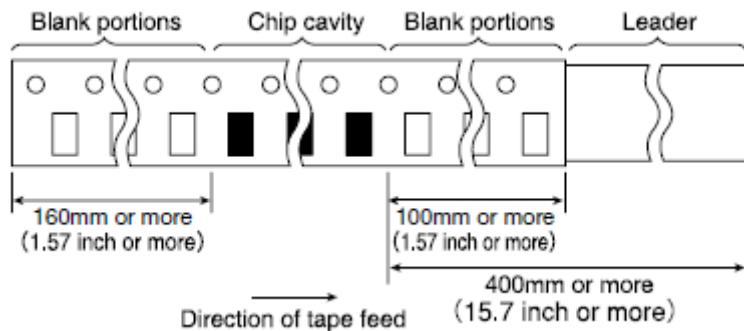

⑤ Reel size

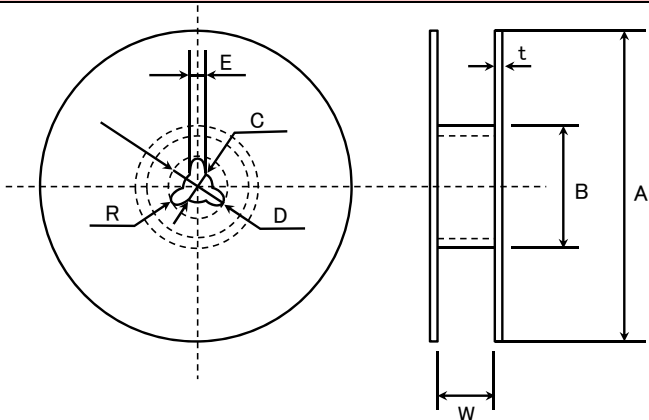


| A | B | C | D | E | R |
|---|--|---|---|--|-----|
| $\phi 178 \pm 2.0$ ($\phi 7.01 \pm 0.079$) | $\phi 50 \text{ min.}$ ($\phi 1.97 \text{ min.}$) | $\phi 13.0 \pm 0.2$ ($\phi 0.512 \pm 0.008$) | $\phi 21.0 \pm 0.8$ ($\phi 0.827 \pm 0.031$) | 2.0 ± 0.5 (0.079 ± 0.020) | 1.0 |

| | t | W |
|---|------------------------|---------------------------------------|
| 8mm width tape (0.315 inches width) | 2.5max. (0.098max.) | 10 ± 1.5 (0.394 ± 0.059) |
| 12mm width tape (0.472 inches width) | 2.5max. (0.098max.) | 14 ± 1.5 (0.551 ± 0.059) |

Unit: mm (inch)



⑥ Top Tape Strength

The top tape requires a peel-off force of 0.1~0.7N in the direction of the arrow as illustrated below.

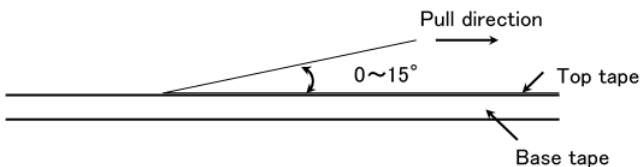

MULTILAYER CERAMIC DEVICES / DIPLEXERS / COUPLER / 2 BRANCH COUPLER

RELIABILITY DATA

| 1. Operating Temperature Range | |
|---------------------------------------|--|
| Specified Value | -40~+85°C |
| 2. Storage Temperature Range | |
| Specified Value | -40~+85°C |
| Test Methods and Remarks | ※Note : -20 to +40°C in taped packaging |
| 3. Resistance to Flexure of Substrate | |
| Specified Value | No mechanical damage. |
| Test Methods and Remarks | <p>Warp : 2mm Testing board : Glass epoxy-resin substrate Thickness : 0.8mm</p>  <p>[Unit: mm]</p> |
| 4. Adhesion of Electrode | |
| Specified Value | Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality. |
| Test Methods and Remarks | <p>Applied force : 5N Duration : 10 sec.</p>  <p>Cross-section</p> |
| 5. Solderability | |
| Specified Value | 75% or more of immersed surface of terminal electrode shall be covered with fresh solder. |
| Test Methods and Remarks | <p>Solder temperature : 240±5°C Duration : 3±1 sec Preconditioning : Immersion into flux. Immersion and Removal speed : 25mm/sec.</p> |
| 6. Resistance to Solder Heat | |
| Specified Value | Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality. |
| Test Methods and Remarks | <p>Preheating : 150°C for 2 min. Solder temperature : 260±5°C Duration : 5±0.5 sec. Preconditioning : Immersion into flux. Immersion and Removal speed : 25mm/sec. Recovery : 2 to 3hrs of recovery under the standard condition after the removal from test chamber.</p> |

7. Thermal Shock

| Specified Value | Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality. | | | | | | | | | | | | | | | |
|--|---|------------------|------------------|----------------|---|-------|------|---|------------------|----------|---|------|------|---|------------------|----------|
| Test Methods and Remarks | According to JIS C60068-2-14. Conditions for 1 cycle | | | | | | | | | | | | | | | |
| | <table border="1"><thead><tr><th>Step</th><th>Temperature (°C)</th><th>Duration (min)</th></tr></thead><tbody><tr><td>1</td><td>-40±3</td><td>30±3</td></tr><tr><td>2</td><td>Room Temperature</td><td>Within 3</td></tr><tr><td>3</td><td>85±2</td><td>30±3</td></tr><tr><td>4</td><td>Room Temperature</td><td>Within 3</td></tr></tbody></table> | Step | Temperature (°C) | Duration (min) | 1 | -40±3 | 30±3 | 2 | Room Temperature | Within 3 | 3 | 85±2 | 30±3 | 4 | Room Temperature | Within 3 |
| | Step | Temperature (°C) | Duration (min) | | | | | | | | | | | | | |
| | 1 | -40±3 | 30±3 | | | | | | | | | | | | | |
| | 2 | Room Temperature | Within 3 | | | | | | | | | | | | | |
| 3 | 85±2 | 30±3 | | | | | | | | | | | | | | |
| 4 | Room Temperature | Within 3 | | | | | | | | | | | | | | |
| Number of cycles : 100 | | | | | | | | | | | | | | | | |
| Mounting method : Soldering onto PC board. | | | | | | | | | | | | | | | | |
| Recovery : 2 to 3hrs of recovery under the standard condition after the removal from test chamber. | | | | | | | | | | | | | | | | |

8. Humidity (steady state)

| | |
|--------------------------|--|
| Specified Value | Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality. |
| Test Methods and Remarks | Temperature : +85±2°C Humidity : 85±5%RH Duration : 1000 hrs Recovery : 2 to 3hrs of recovery under the standard condition after the removal from test chamber. |

9. High temperature life test

| | |
|--------------------------|--|
| Specified Value | Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality. |
| Test Methods and Remarks | Temperature : +85±2°C Duration : 1000 hrs Recovery : 2 to 3hrs of recovery under the standard condition after the removal from test chamber. |

10. Low temperature life test

| | |
|--------------------------|--|
| Specified Value | Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality. |
| Test Methods and Remarks | Temperature : -40±2°C Duration : 1000 hrs Recovery : 2 to 3hrs of recovery under the standard condition after the removal from test chamber. |

Note on standard condition:

“standard condition” referred to herein is defined as follows :
5 to 35°C of temperature, 45 to 85% relative humidity and 86 to 106kPa of air pressure.

When there are questions concerning measurement result :

In order to provide correlation data, the test shall be conducted under condition of 20±2°C of temperature, 60 to 70% relative humidity and 86 to 106kPa of air pressure.

Unless otherwise specified, all the tests are conducted under the “standard condition”.

MULTILAYER CERAMIC DEVICES / DIPLEXERS / COUPLER / 2 BRANCH COUPLER

PRECAUTIONS

1. PCB Design

◆ Land pattern design

Land pattern dimension examples


Technical considerations

| FI 212B Side 4Pins type | FI 212B LGA 3Pins type | FI 168B/L Side 4Pins type | FI 105B/L Side 4Pins type |
|---|------------------------|---------------------------|---------------------------|
| | | | |
| FI 168L/FI 168P/FI 168D/FI 168K Side 4Pins type | FI 168L/H LGA Type | FI 212C Type | FI 168P Side 4Pins type |
| | | | |
| FI 212P Side 6Pins type | FI 212P LGA 6Pins Type | FQ 105P Type | FI 168W Type |
| | | | |

2. Soldering

◆ Conditions for Reflow soldering (for reference)

- Pb Free Reflow Profile

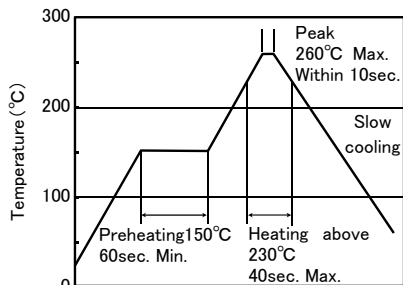

- ※ Components should be preheated to within 100 to 130°C from soldering temperature.
- ※ Assured to be reflow soldering for 2 times.

Note : The above profiles are the maximum allowable soldering condition, therefore these profiles are not always recommended.

3. Storage conditions

Precautions

◆ Storage conditions

1. The Products must not be used in the following environments :

- exposure to special gases such as (Cl₂, NH₃, SO_x, NO_x)
- exposure to volatile gas or inflammable gas
- exposure to a lot of dust
- exposure to water or condensation
- exposure to direct sunlight or freezing

2. The Products should be kept in the following conditions :

- Temperature : -10~+40°C
- Humidity : 15~85%RH max.

3. The products should be used within 6 months after delivery. In case of storage over 6 months, solderability shall be checked before actual usage.

■ Please contact of our offices for further details of specifications.

All of the standard values listed here are subject to change without notice.

Therefore, please check the specifications carefully before use.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning category](#):

Click to view products by [Taiyo Yuden manufacturer](#):

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [10017-3](#) [TP-103-PIN](#) [BD1222J50200AHF](#)