

TW5394

TW5394 Smart GNSS Antenna for Precise Positioning & Heading

Overview

The TW5394 is a multi-band (L1/L2), multi-constellation integrated GNSS receiver/antenna with integrated L-Band augmentation receiver for stand alone PointPerfect[®] PPP- RTK applications. The TW5394 is capable of providing sub 6 cm PPP-RTK accuracy and sub 1 cm RTK accuracy to support the most demanding navigation, automation and precision mobility applications. Two TW5394's may be combined as a Moving Base and Rover arrangement to offer a Precise Heading solution.



Interference Resilience

The TW5394 incorporates a latest generation multi-band (L1/ L2) GNSS receiver with a Tallysman Accutenna[™] multi-band dual-feed patch. The state of the art GNSS receiver supports concurrent tracking of all four major constellations (GPS, BeiDou, Galileo and GLONASS) in multiple frequency bands, offering high availability for PPP-RTK or RTK solutions with a quick convergence time. The multi-band architecture has proven to be a highly effective method for the removal of ionospheric error. The TW5394 employs multi-stage XF[™] filtering with low noise figure LNAs, combined with the dual feed Accutenna[™], which greatly improves the rejection of multi-path signal interference.

Corrections Applications

The TW5394 incorporates an L-Band correction receiver which offers sub 6 cm accuracy through real-time PPP-RTK corrections via the PointPerfect subscription service. (No RTK base station is required, typical of traditional RTK applications.) TW5394 offers quick convergence and continuous corrections for North America and Europe for remote regions without IP/Network coverage. PointPerfect IP streaming corrections are available in continental US, Canada, Europe, South Korea and Australia.

The TW5394 may also be configured to operate in an RTK mode as either a base or rover for sub cm precision. For Precise Heading applications, two TW5394's may be arranged as a moving base and rover pair. The moving base device may receive PPP-RTK corrections while concurrently sending RTCM correction messages to the rover.

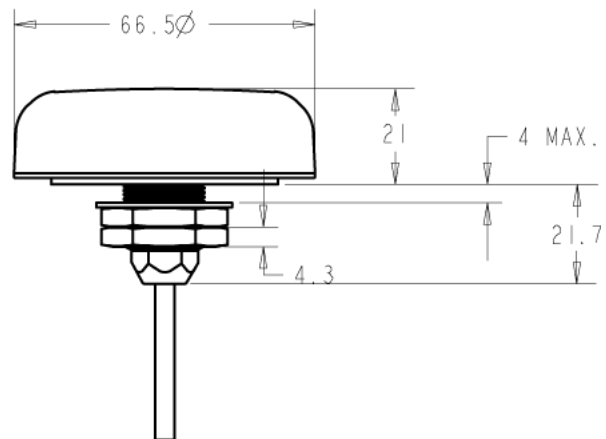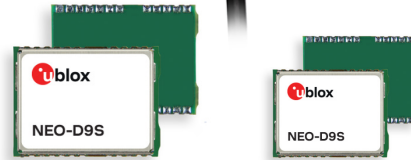

Features

- An Out-of-the-Box, Plug and Play, Precise Positioning Solution
- Integrated L-Band corrections receiver for remote precision deployments
- High position availability with XF[™] filtering and expansive constellation
- Strong multi-path rejection with Dual feed Accutenna[™]
- Supports PointPerfect PPP-RTK and traditional RTK configurations
- Moving-base/rover pairing for Precise Heading
- Rugged Fixed Mount
- Industrial grade IP69K enclosure
- RS-422/485 or RS-232 signalling options
- Industrial grade IP69K enclosure
- Available with conical radome
- L1/L5 option available

TW5394 Smart GNSS Antenna for Precise Positioning & Heading

Specifications

Antenna	
Architecture	Multi-band (L1/L2), Dual Feed
Axial Ratio	L1: < 1 dB typical.
Signal Support	GPS L1C/A L2C, GLO L10F L20F, GAL E1B/C E5b, BDS B1I B2I, QZSS L1C/A L2C
SBAS L1 C/A	WAAS, EGNOS, MSAS, GAGAN
Channels	184-channel u-blox F9 engine
Anti-jamming	Active CW detection
Corrections Receiver	L-Band PPP-RTK (SSR)
Corrections Data Rate	Continental: 2400 bps
Regions	.EU, US, AUS, KR
Format	.SPARTN, RTCM

Interface (2 options)	
PWR, GND, DP, DM	.RS-422/485, RJ45 (-09)
PWR, GND, TX, RX	.RS-232, RJ45 (-29)

Serial Protocol	
Output	.NMEA 0183, UBX Binary, RTCM v3.3
Baud Rate	.Configurable
Update Rate (PVT)	.9 Hz (4); 10 Hz (GPS+GAL+BDS); 20 Hz (GPS+GAL); 20 Hz (GPS+GLO); 16 Hz (GP+BDS); 25 Hz (GPS)

Mechanical	
Dimensions	.66.5 mm dia. x 21 mm H
Weight	.135 g
Mounting Method	.Fixed Mount
Cable Length	.5m

Electrical	
Voltages	.5 VDC
Current	.1 Watts (nominal operating) Measured @ 5VDC supply

Environmental	
Operating Temperature	..-40°C to +85°C
Storage Temperature	..-40°C to +85°C
Weatherproof	..IP69K
Shock	..Vertical axis 50G, other axis 30G 3 axis sweep – 15 min
Vibration	..10-200 Hz log sweep 3G

Sensitivity	
Tracking & Nav	..-167 dBm
Reacquisition	..-160 dBm
Hot starts	..-157 dBm
Cold starts	..-148 dBm

Acquisition	
Cold start	..25 sec
Aided start	..2 sec
Reacquisition	..2 sec

Horizontal Position Accuracy (4 Constellations)	
Standard PVT	..1.5m CEP
Standard SBAS	..1.0m CEP
Corrected RTK	..0.01m + 1ppm CEP
Augmented SPARTN (PPP-RTK)	..<0.06m CEP
SPARTN Convergence	..<45 sec

Heading	
Dynamic Heading Accuracy	..0.3° (30 m/sec)
Precise Heading Accuracy	..0.4° (min 1m baseline)

Operational Limits	
Dynamics	..< 4g
Altitude	..80,000m
Velocity	..500 m/sec

Ordering Information:

33-5394-09-yy-05-PC0 (RS422/485 RJ45, 00 = grey conical 10= grey low profile 01= white conical 11= white low profile)

33-5394-29-yy-05-PC0 (RS-232, RJ45, 00 = grey conical 10= grey low profile 01= white conical 11= white low profile)

RS-232 to USB Bridge for 33-5394-29-10-05-PC0: **33-0095-3** (applicable only to RS-232)

RS-422/485 to USB Bridge for 33-5394-09-10-05-PC0: **33-0095-11** (applicable only to RS-422/485)

DB9 Configurator Adaptor **27-0045-0** (applicable only to RS-232)

Please refer to the Ordering Guide for the current and complete list of available products.



When precision matters.®

About Tallysman: With global headquarters and manufacturing in Ottawa, Canada, Tallysman is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Tallysman's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at www.tallysman.com

Contact us:
info@tallysman.com
T: +1 613 591-3131

© 2023 Tallysman Inc. All rights reserved. Tallysman, the "When Precision Matters" tag line and the Tallysman logo are trademarks or registered trademarks of Tallysman Inc. and/or its affiliates in Canada and certain other countries. All other trademarks mentioned in this document are the property of their respective owners. The information presented is subject to change without notice. Tallysman assumes no responsibility or any errors or omissions in this document. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antenna Development Tools](#) category:

Click to view products by [Tallysman](#) manufacturer:

Other Similar products are found below :

[PCSD.06.A](#) [1002427-02](#) [1004796-01](#) [YC0010AAEVB](#) [1001013-02](#) [1005454-01](#) [1004795-01](#) [1002436-01](#) [ACR1004A-EVB](#) [RAC00024-EVB](#) [RAC00245-EVB](#) [ACR1004GC-EVB](#) [W3012-K](#) [W3006-K](#) [SPD.25A](#) [74889100TB](#) [A10192-U1](#) [DTAD.01.A.50](#) [SR4C033-EVB-1](#) [AEK-LTE-CER](#) [IOT-K](#) [SR4W035-EVB-1](#) [W3010-K](#) [LORA-K](#) [ISM-K](#) [REFLECTOR-EVB-1](#) [ACAG0201-2450-EVB](#) [ACAG0301-15752450-EVB](#) [ACAG0301-1575-EVB](#) [ACAG0301-24505500-EVB](#) [ACAG0301-5500-EVB](#) [ACAG0801-2450-EVB](#) [ACAG1204-433-EVB](#) [ACAG1204-868-EVB](#) [ACAG1204-915-EVB](#) [ACAR0301-SW2-EVB](#) [ACAR3005-C2WB-EVB](#) [ACAR3005-S824-EVB](#) [ACAR3705-S698-EVB](#) [ACAR4008-S698-EVB](#) [ACR0301U-EVB](#) [ACR1504I3-EVB-A](#) [ACR1504I3-EVB-S](#) [ACR2005I4-EVB](#) [ACR4006X-EVB](#) [PRO-EB-450](#) [PRO-EB-453](#) [PRO-EB-472](#) [PRO-EB-476](#) [PRO-EB-550](#)