

Meteor

Part No: FW.24.SMA.M

Description:

Meteor 2.4GHz Flexible Whip Monopole Antenna

Features:

External 2.4GHz Monopole Antenna Rugged Design for Outdoor Use Over 70% Efficiency* Over 4dBi Peak Gain* Robust Inner Steel Core Antenna height 316mm SMA(M) Straight Connector IP65 dust and water-resistant *Tested on 30*30cm Ground Plane RoHS Compliant

www.taoglas.com



1.	Introduction	3
2.	Specifications	4
3.	Antenna Characteristics	5
4.	Radiation Patterns	8
5.	Mechanical Drawing	11
6.	Packaging	12
	Changelog	13

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.





1. Introduction



The FW.24 is a flexible 2.4GHz whip antenna with a SMA(M) connector for outdoor use. It features excellent efficiency (>75%) and high peak gain (>4 dBi) between 2400-2500MHz on a 30*30cm ground plane.

The antenna was specifically developed for applications such as weather monitoring systems, motion/vibration sensors, pollution monitoring, and border guard monitoring systems.

The FW.24 works in the 2.4 GHz Wi-Fi/Bluetooth/ISM band with high efficiency, meaning that it allows your radio to consume less power than with a lower efficiency antenna when transferring data. The antenna performs at its best while attached to a ground plane with dimensions of at least 30*30cm.

The whip is made of a flexible inner steel core covered by PE so it is extremely resistant to abrasion and maintains its original shape and RF performance. This rugged design and IP65 rating has been tested by customers to withstand environmental stress and moderate physical shock in the field.

The FW.24.SMA.M 2.4GHz antenna provides a simple solution to any outdoor devices where the FW.24 antenna's rugged design and high efficiency can provide the best value to the application. For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

Other connector options are available or custom versions can be made subject to NRE and MOQ. Contact your regional Taoglas office for details.




Specifications

2.

2.4GHz Wi-Fi					
Frequency	2400~2500MHz				
	In free space	On 30x30cm ground			
Efficiency	64.5%	79.3%			
Peak Gain	4.26dBi	4.48dBi			
Return loss	< -6dB	< -10dB			
VSWR	≤ 3:1	≤ 2:1			
Impedance	50Ω				
Polarization	Linear				
Radiation Pattern	Omni-Directional				
Input Power	Input Power 2 W				
Total Power	10	D W C			
Mechanical					
Dimensions Height 307 ± 6 mm		07 ± 6 mm			
Base Diameter	16 ± 0.8 mm				
Whip Diameter	6.2 ±	0.6 mm			
Casing	A	ABS			
Connector	SMA Male Straight				
Weight	46	5.6 g			
Dust and Water Resistance	I	265			
	Environmental				
Temperature Range	perature Range -40°C to 85°C				
Humidity	Humidity Non-condensing 65°C 95% RH				




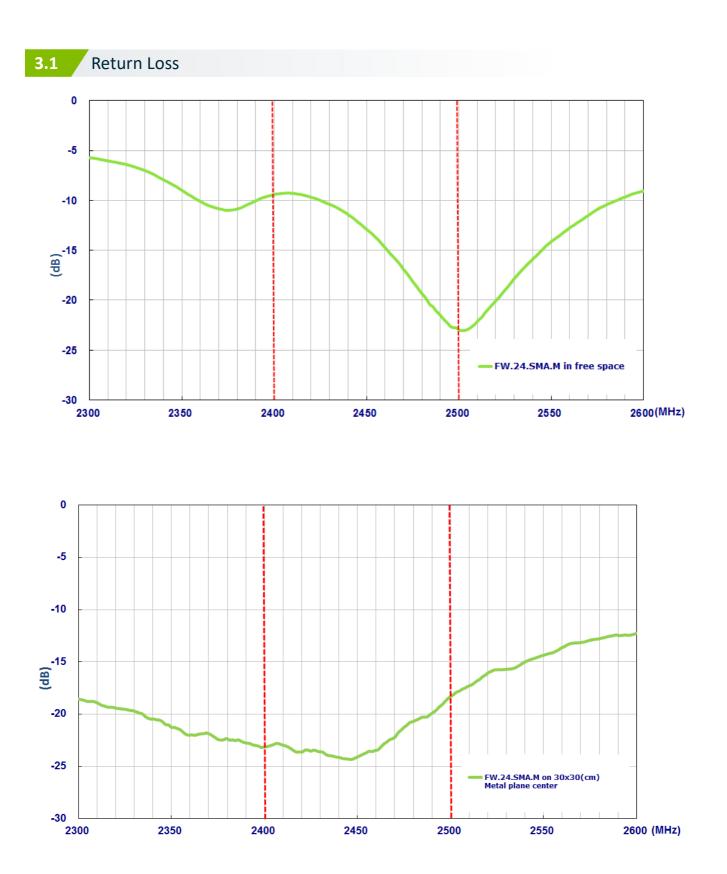

3.





3.2 Efficiency

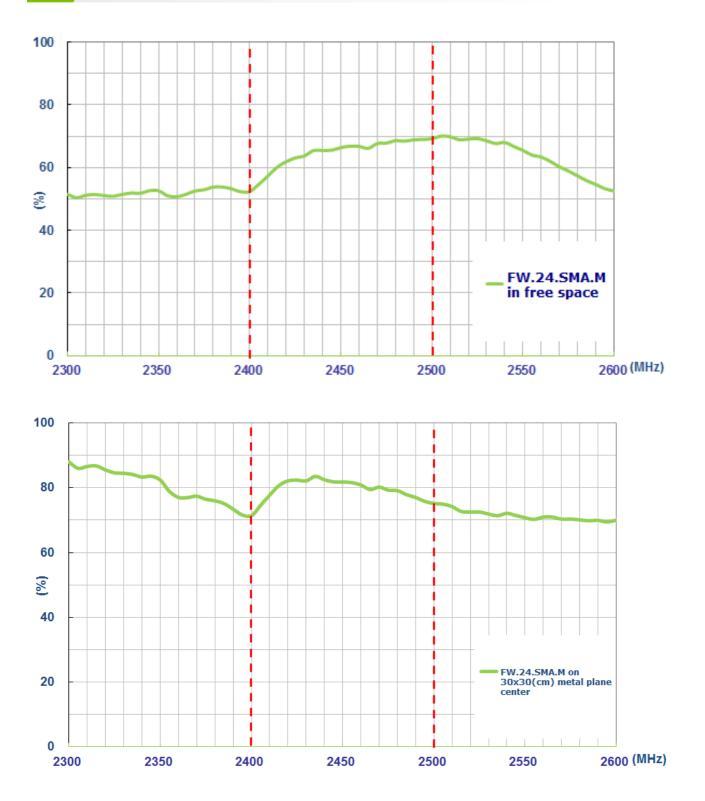




3.3 Peak Gain

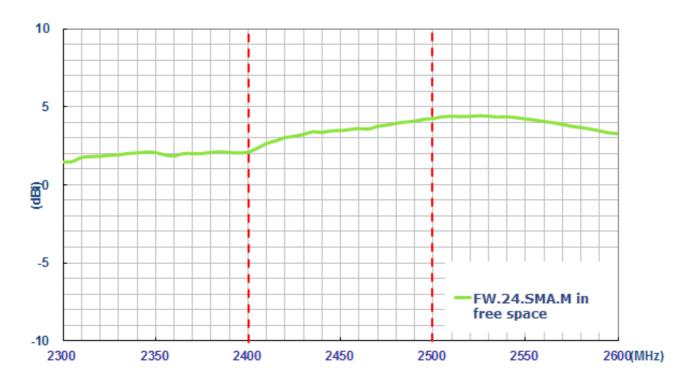

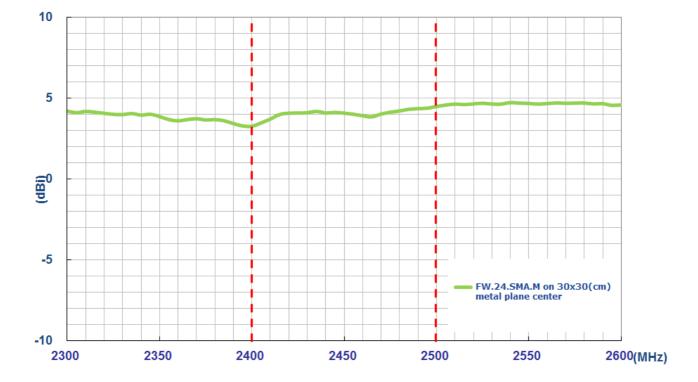




4.1 Test Setup

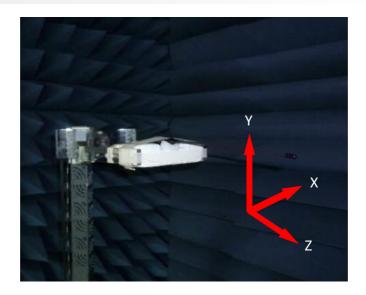


Free space

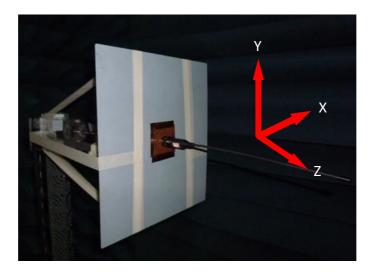


On 30x30 cm ground plane




4.2 3D and 2D Radiation Patterns

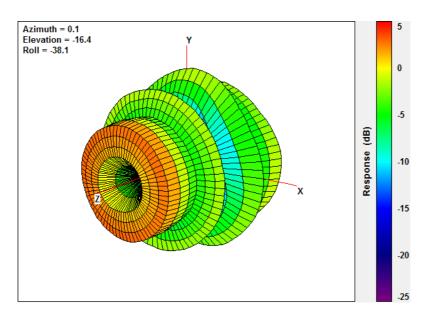

3-D Radiation Pattern in free space @2450MHz

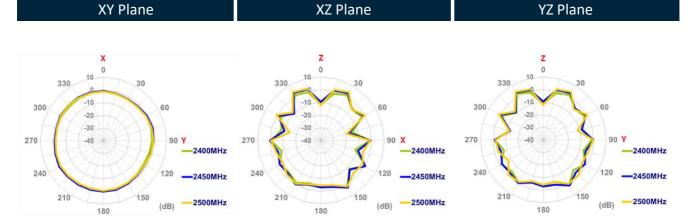



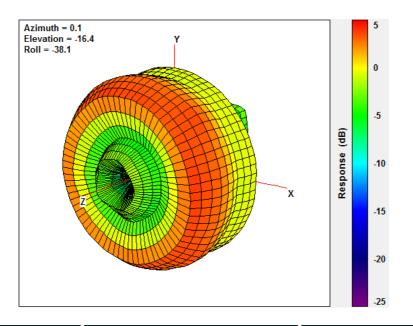


3-D Radiation Pattern on 30cm*30cm Ground Plane @2450MHz


XY Plane

XZ Plane

YZ Plane

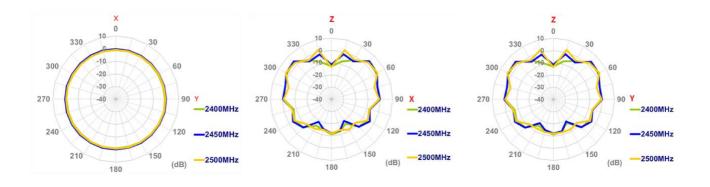



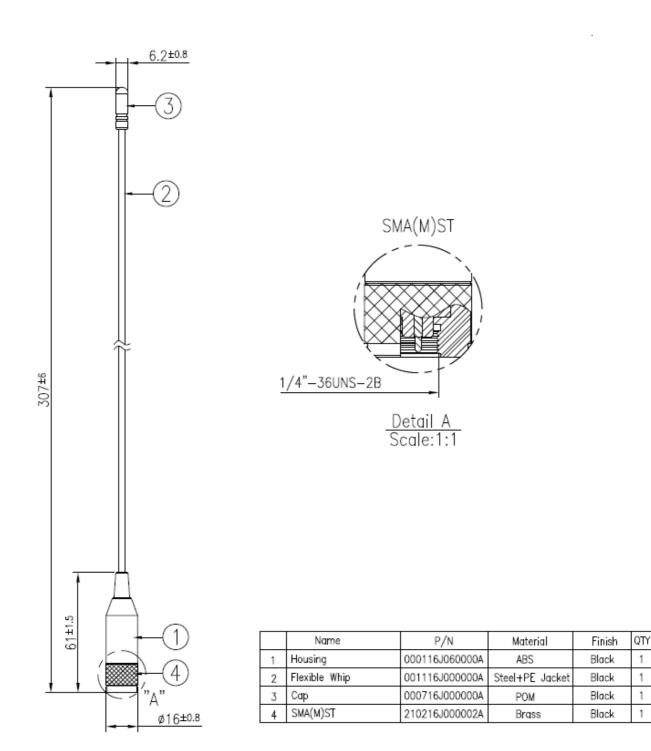




6. Packaging

1pcs FW.24.SMA.M per PE Bag Bag Dimensions - 420*50mm Weight - 41g

50pcs FW.24.SMA.M per Large PE Bag Bag Dimensions - 520*370mm Weight - 2.2Kg

200pcs FW.24.SMA.M per Carton Carton Dimensions - 360*310*150mm Weight - 8.4Kg



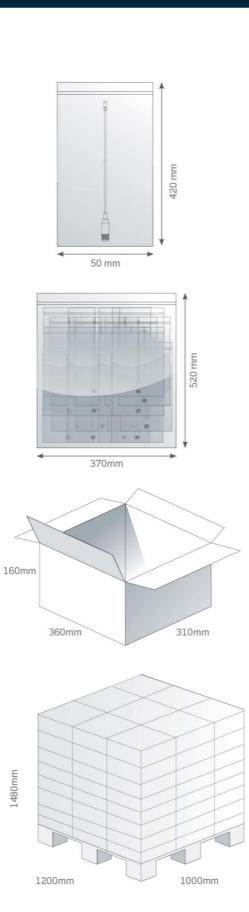



Changelog for the datasheet

SPE-17-8-003 - FW.24.SMA.M

Revision: C					
Date:	2019-08-16				
Changes:	Updated to new format				
Changes Made by:	Dan Cantwell				

Previous Revisions

Revision: B (Current Version)				
Date:	2017-10-19			
Changes:	Changed IP Rating to IP65			
Changes Made by:	Carol Faughnan			

Revision: A (Original First Release)		
Date:	2017-06-01	
Notes:		
Author:	Andrew Wei	



www.taoglas.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Taoglas manufacturer:

Other Similar products are found below :

 GAN30084EU
 930-033-R
 GW17.07.0250E
 1513563-1
 EXE902SM
 APAMPG-117
 MAF94383
 W3908B0100
 W6102B0100
 YE572113

 30RSMM
 108-00014-50
 66089-2406
 SPDA17RP918
 A09-F8NF-M
 A09-F5NF-M
 RGFRA1903041A1T
 W3593B0100
 W3921B0100

 SIMNA-868
 SIMNA-915
 SIMNA-433
 W1044
 W1049B090
 A75-001
 WTL2449CQ1-FRSMM
 CPL9C
 EXB148BN
 0600-00060

 TRA9020S3PBN-001
 Y4503
 GD5W-28P-NF
 MA9-7N
 GD53-25
 GD5W-21P-NF
 C37
 MAF94051
 MA9-5N
 EXD420PL
 B1322NR

 QWFTB120
 MAF94271
 MAF94300
 GPSMB301
 FG4403
 A0-AGSM-OM54
 5200232
 MIKROE-2349
 WCM.01.0111
 MIKROE-2393

 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2349
 WCM.01.0111
 MIKROE-2393