



Part No: FXP523.A.07.A.001

Description:

Venti Flex PCB Wi-Fi MIMO 2.4/5.8/7.1GHz Antenna with 3 ports with Wi-Fi 6 frequency bands included

Features:

Covers Extended Wi-Fi Frequencies of 2.4-2.5GHz, 5-7.125GHz

Flex PCB MIMO Antenna

Adhesive Tape for ease of installation

Cables: 100mm of Ø1.37mm

Connectors: I-PEX MHF® I (U.FL Compatible)

Rohs & Reach Compliant



1.	Introduction	3
2.	Specifications	5
3.	Antenna Characteristics	6
4.	Radiation Patterns	9
5.	Mechanical Drawing	11
6.	Packaging	12
	Changelog	13

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.













1. Introduction



The FXP523 Venti antenna is a 3-in-1 MIMO, flexible PCB monopole type antenna designed to operate at widely used Wi-Fi frequencies. The FXP524 is a future proof antenna as it has been proven to cover the frequencies required for Wi-Fi 6 applications. The antenna has excellent efficiency and isolation performance for all Wi-Fi applications. Featuring a low profile height of only 0.15mm, the FXP523 is an ideal solution for maintaining high performance while fitting into narrow spaces such as plastic enclosures for laptops, tablets, routers, and other Wi-Fi applications.

The antenna has been designed in a flexible material with a rectangular form-factor and cable connection for an easy installation. The antenna comes with double-sided 3M tape for easy and robust "peel and stick" mounting. The antenna cables feature IPEX connectors for easy installation.

Typical applications include:

- Smart Home
- Routers and Gateways
- Smart Devices
- HD Video Streaming


Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.


Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.



For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

The Cables and connectors are fully customizable subject to MOQ, for further information please contact your regional Taoglas customer support team for more information.

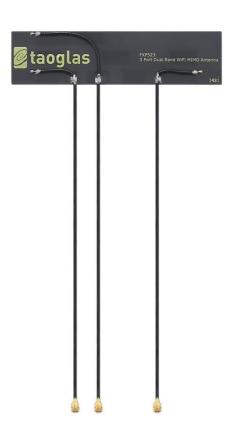

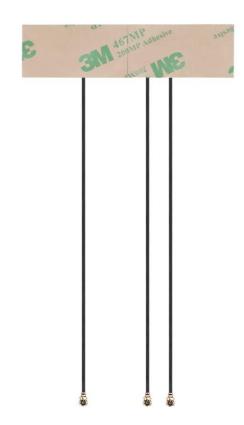




2. Specifications

Electrical									
Band	Frequency (MHz)	Setup	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Max Power Input	Polarization	Radiation Pattern
2.4GHz Wi-Fi	2400~2500	Right Port	41	-3.9	0.2	50Ω	2W	Linear	Omnidirectional
		Centre Port	39	-4	5.7				
		Left Port	28	-5.7	6.6				
	5150~5850	Right Port	58	-2.3	1				
5.8GHz Wi-Fi		Centre Port	45	-3.4	4.4				
		Left Port	49	-3.1	5.1				
		Right Port	31	-5.3	-0.8				
7.1GHz Wi-Fi 6	5925~7125	Centre Port	35	-4.7	4.3				
		Left Port	39	-4.1	4.5				
				Mecha	nical				
Dimensions			80mm X 20mm X 0.1mm						
Antenna Body Material			Polymer						
Cable			3* Black 1.37mm Coaxial Cable						
Cable Length			100mm						
Connector			IPEX MHFHT						
Weight			8g						
Environmental En									
Tem	Temperature Range			-40°C to 85°C					
Humidity			Non-condensing 65°C 95% RH						




3. Antenna Characteristics

3.1 Return Loss

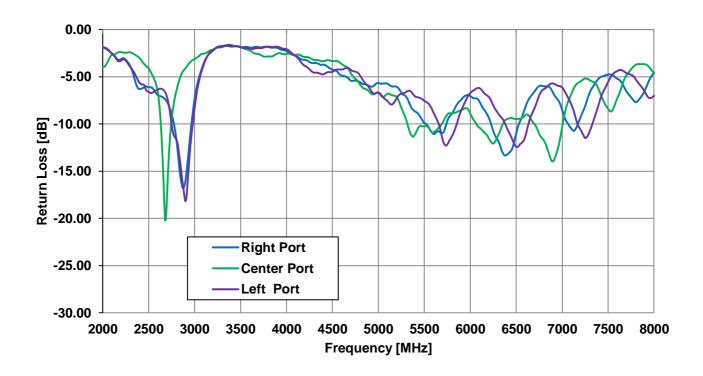


3.2 VSWR

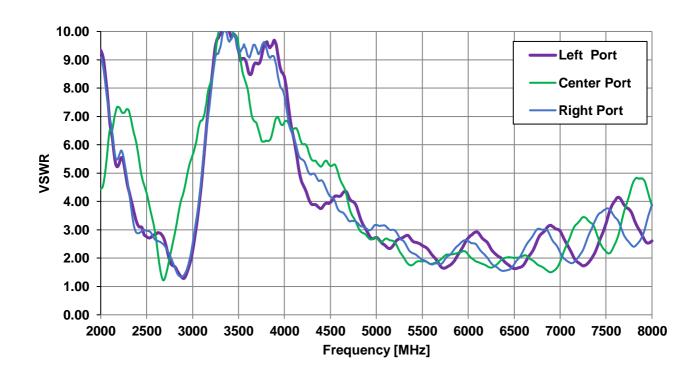




3.3 Efficiency

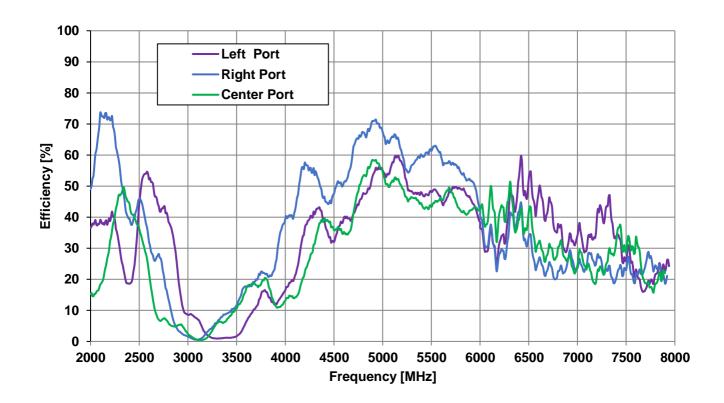


3.4 Peak Gain

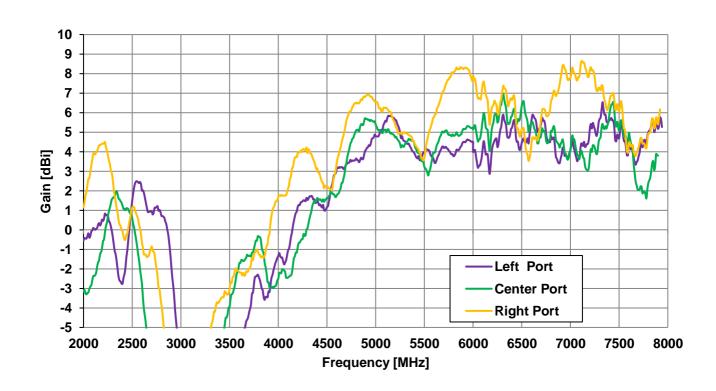



3.5 Average Gain

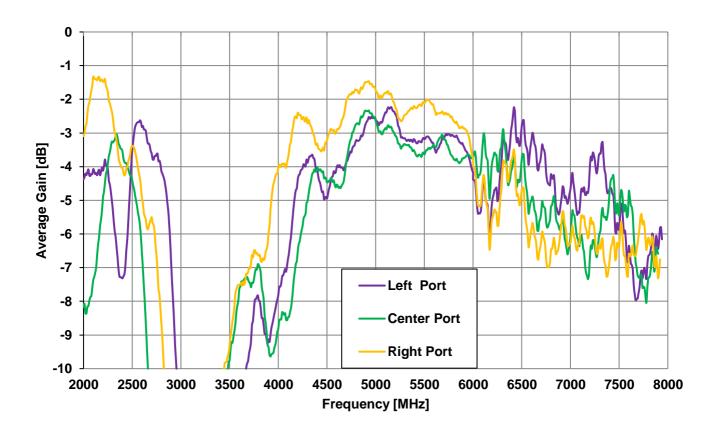



4. Radiation Patterns

4.1 Test Setup – 2mm ABS





-2400 MHz -5000 MHz -5500 MHz

-6000 MHz -6500 MHz -7000 MHz

10

4.2 842MHz 3D and 2D Radiation Patterns **Right Port** XY Plane YZ Plane XZ Plane —2400 MHz —5000 MHz —5500 MHz -2400 MHz 2400 MHz 5000 MHz 5500 MHz 6000 MHz 6500 MHz 7000 MHz 6000 MHz 6500 MHz 7000 MHz -6000 MHz -6500 MHz -7000 MHz **Centre Port** XY Plane YZ Plane XZ Plane -2400 MHz -2400 MHz = 2400 MHz = 5000 MHz = 5500 MHz = 6500 MHz -5000 MHz -5500 MHz -6000 MHz -6500 MHz —5000 MHz —5500 MHz -6000 MHz -7000 MHz -7000 MHz -7000 MHz **Left Port** XY Plane XZ Plane YZ Plane

SPE-14-8-107-D www.taoglas.com

-2400 MHz -5000 MHz -5500 MHz -6000 MHz -6500 MHz -7000 MHz -2400 MHz


5000 MHz 5500 MHz 6000 MHz

-6500 MHz



11

Mechanical Drawing (Units: mm)

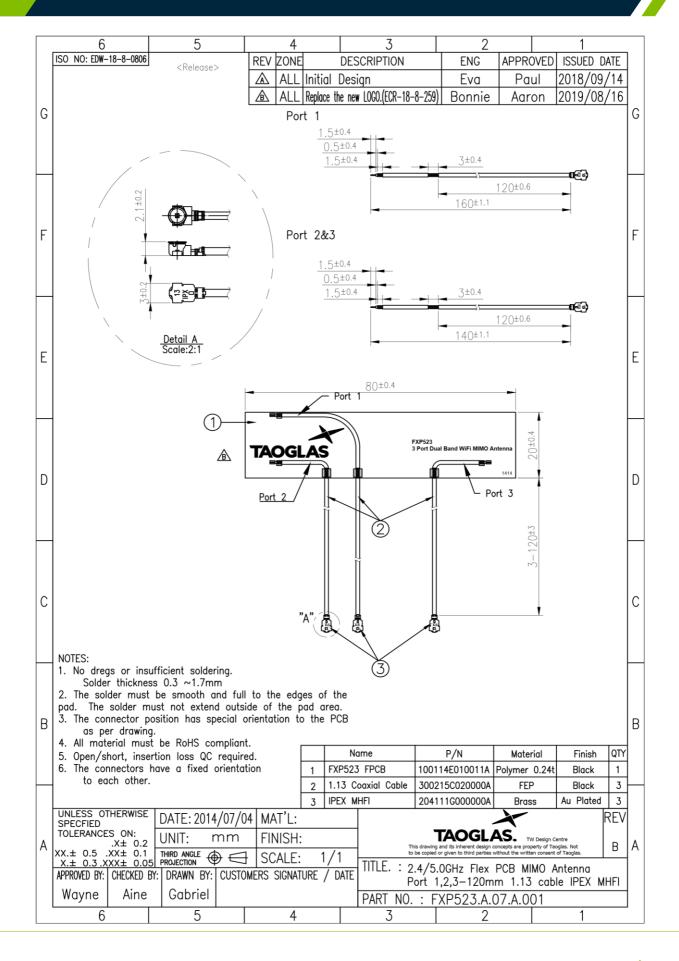




12

6. Packaging

10 pcs per Small PE Bag

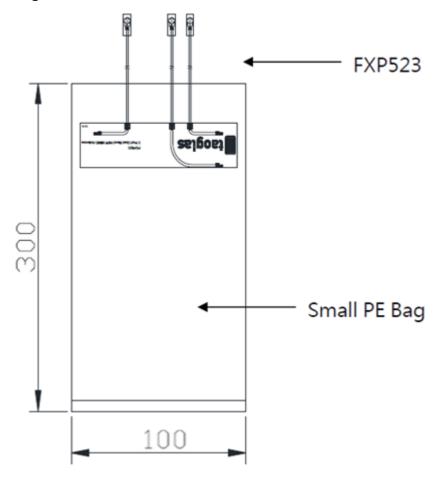



13

Changelog for the datasheet

SPE-14-8-107 - FXP523.A.07.A.001

Revision: D (Current Version)		
Date:	2020-07-03	
Changes:	Updated to Include Wi-Fi 6	
Changes Made by:	Jack Conroy	

Previous Revisions

Revision: C		
Date:	2015-08-14	
Changes:	Amended Cable Length	
Changes Made by:	Aine Doyle	

Revision: B		
Date:	2015-01-14	
Changes:	Added Note on Intro	
Changes Made by:	Aine Doyle	

Revision: A (Original First Release)		
Date:	2014-10-21	
Notes:		
Author:	Technical Writer	



www.taoglas.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Taoglas manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352