



# Datasheet

## GPSF.36.7.A.30

**Part No:**  
GPSF.36.7.A.30

### **Description:**

GPS L1/L2, GONASS G1, Bei Dou B1 And Galileo E1  
36mm Single Feed Stacked Patch  
Passive Antenna Low AR

### **Features:**


Highest Accuracy  
Low Axial Ratio  
GPS L1+L2 Band Operation  
GLONASS G1  
Galileo E1  
Bei Dou B1  
Single Feed Patch Assembly  
Dimensions: 36\*36\*7mm  
Tuned for Centre Positioning on a 70\*70mm  
Ground-plane

1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	7
4. Radiation Patterns	12
5. Mechanical Drawing	14
6. Packaging	15
<hr/>	
Changelog	16

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



# 1. Introduction

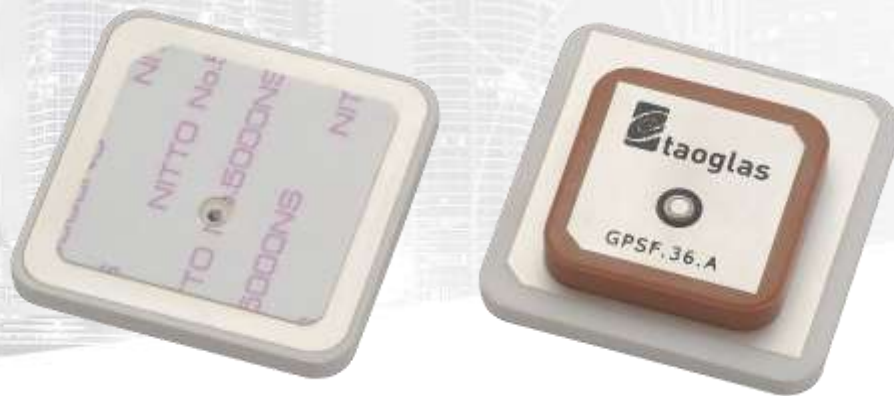

The GPSF.36.7.A.30 is a 36x36mm ceramic low profile, low axial-ratio, embedded stacked passive patch antenna with a 7mm height. It is designed as a high performance yet economical solution for highest accuracy centimeter level tracking in telematics applications and covers:

- GPS L1/L2,
- Galileo E1,
- GLONASS G1
- Bei Dou B1

Typical applicable industries are

- UAVs and Drones
- Transportation
- Autonomous Vehicles
- Marine
- Agriculture
- Navigation

This compact antenna exhibits excellent gain and radiation pattern stability on covered bands, improved reliability of a GPS fix in urban areas, better signal reception with more satellites acquired, and a quicker time to first fix.

The antenna has been tuned and tested on a 70 X 70 mm ground plane. It can be easily through-hole mounted on PCB via pin. The double-sided adhesive on the bottom of the patch helps to keep it in place while being assembled.

For further optimization to customer specific device environments, a custom tuned patch antenna and circuit integration service into your device can be supplied, subject to NRE and MOQ. Contact your regional Taoglas customer support team for this requirement, and for support to integrate and test this antenna's performance in your device.

## 2. Specifications

GNSS Frequencies Covered					
GPS	L1	L2	L5		
	■	■	□		
GLONASS	G1	G2	G3		
	■	□	□		
Galileo	E1	E5a	E5b	E6	
	■	□	□	□	
BeiDou	B1	B2a	B2b	B3	
	■	□	□	□	
QZSS (Regional)	L1	L2C	L5	L6	
	■	■	□	□	
IRNSS (Regional)	L5				
	□				
SBAS	L1/E1/B1	L5/B2a/E5a	G1	G2	G3
	■	□	■	□	□

\*SBAS systems: WASS(L1/L5), EGNOS(E1/E5a), SDCM(G1/G2/G3), SNAS(B1,B2a), GAGAN(L1/L5), QZSS(L1/L5), KAZZ(L1/L5).

<b>Electrical</b>		
	<b>GPS L1</b>	<b>GPS L2</b>
<b>Center Frequency</b>	<b>1575.42 MHz</b>	<b>1227.60 MHz</b>
Return loss (dB)	< -10	< -10
Efficiency (%)	91.30	67.57
Peak Gain (dBi)	5.44	3.10
Axial Ratio at Zenith (dB)	1.69	2.70
Impedance	50 Ohm	
Polarization	RHCP	

<b>Mechanical</b>		
	<b>GPS L1</b>	<b>GPS L2</b>
Ceramic Dimension	25*25*4mm	36*36*3 mm
Pin Diameter	0.80 mm	
Pin Length	2.40 mm	
PCB Dimension	70*70 mm	
Weight	23.4g	

<b>Environmental</b>	
Operation Temperature	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH

\*Tested on square 70\*70 mm ground-plane.

### Field Test Result with 70\*70mm ground plane

Frequency	GPS L1	GPS L2	Galileo E1	GLONASS G1	BeiDou B11
	1563-1587	1215-1239.6	1559-1591	1598-1605	1559-1563
Carrier-to-Noise Values(dB-Hz)	43.3	35.6	40.2	37.8	40
2*DRMS Positioning Accuracy (cm) <b>without RTK</b>	150	150	150	150	150
2*DRMS Positioning Accuracy (cm) <b>with RTK</b>	12	12	12	12	12
TTF(s)	33	33	33	33	33
Group Delay @ Zenith Variation Across Single Constellation(ns)	2.2	12	2	20	2.2
Phase Centre Offset PCO (cm)	4	4.6	4	4	4
Phase Centre Variation PCV (mm)	0.5	0.4	0.8	0.8	0.7
Axial Ratio (dB)	2	10	8	16	5.5

\*All outdoor measurements performed on the roof top of the Taoglas R&D Labs facility in Dublin Ireland.


\*\* Recommended Minimum C/No for Standard Precision Acquisition/ Tracking (dB-Hz): 26-30/ 12-15.

\*\*\*Data Measured Free Space.

\*\*\*\*Group Delay, PCO, PCV and Axial Ratio values includes Active Circuitry.



\*\*\*\*\*Ublox C099-F9P application board is used for Field test Measurements.

RTK AVAILABILITY


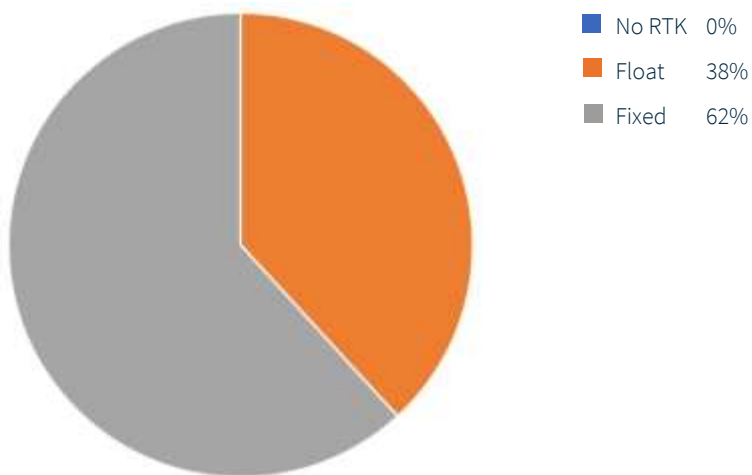


### 3. Antenna Characteristics

#### 3.1 Return Loss

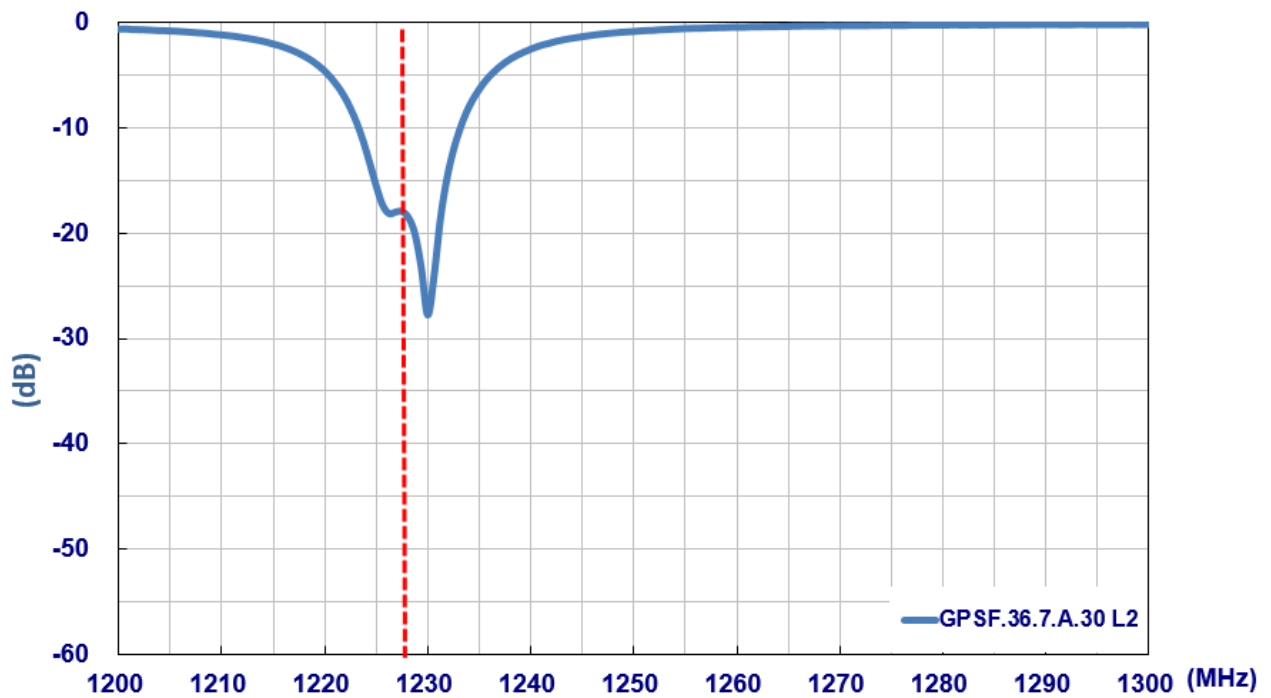
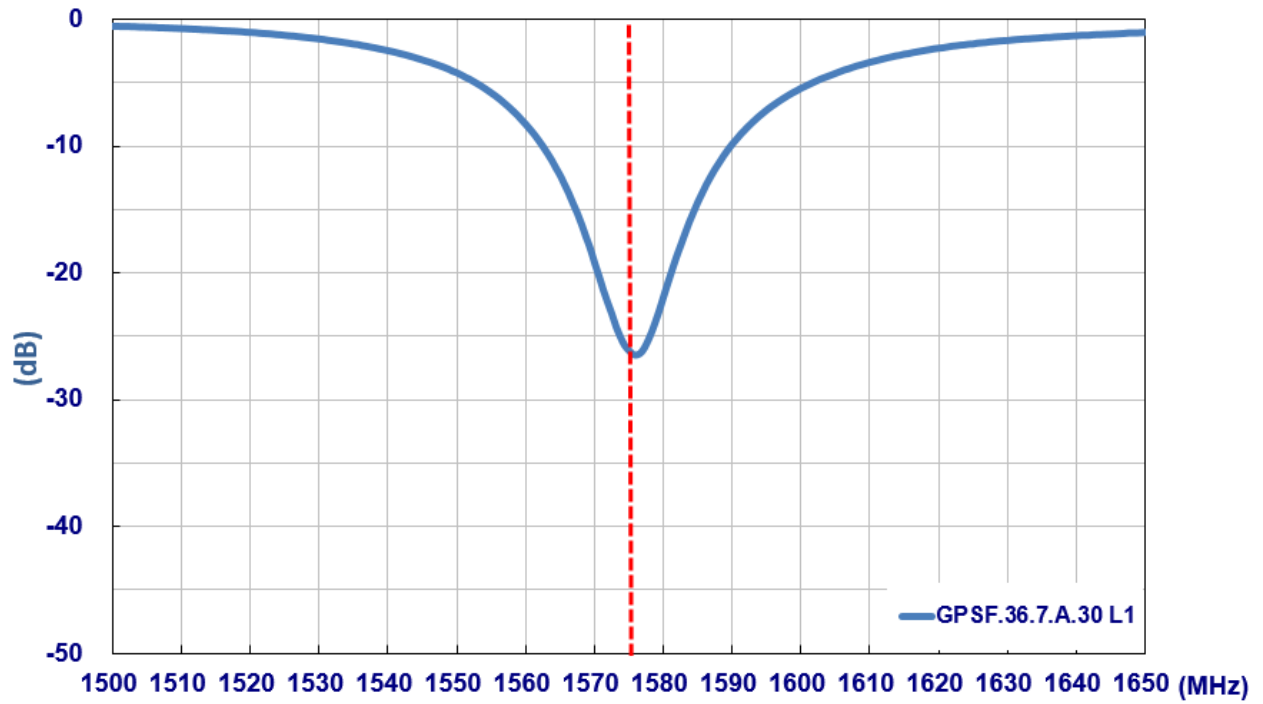


### 3.2 Efficiency

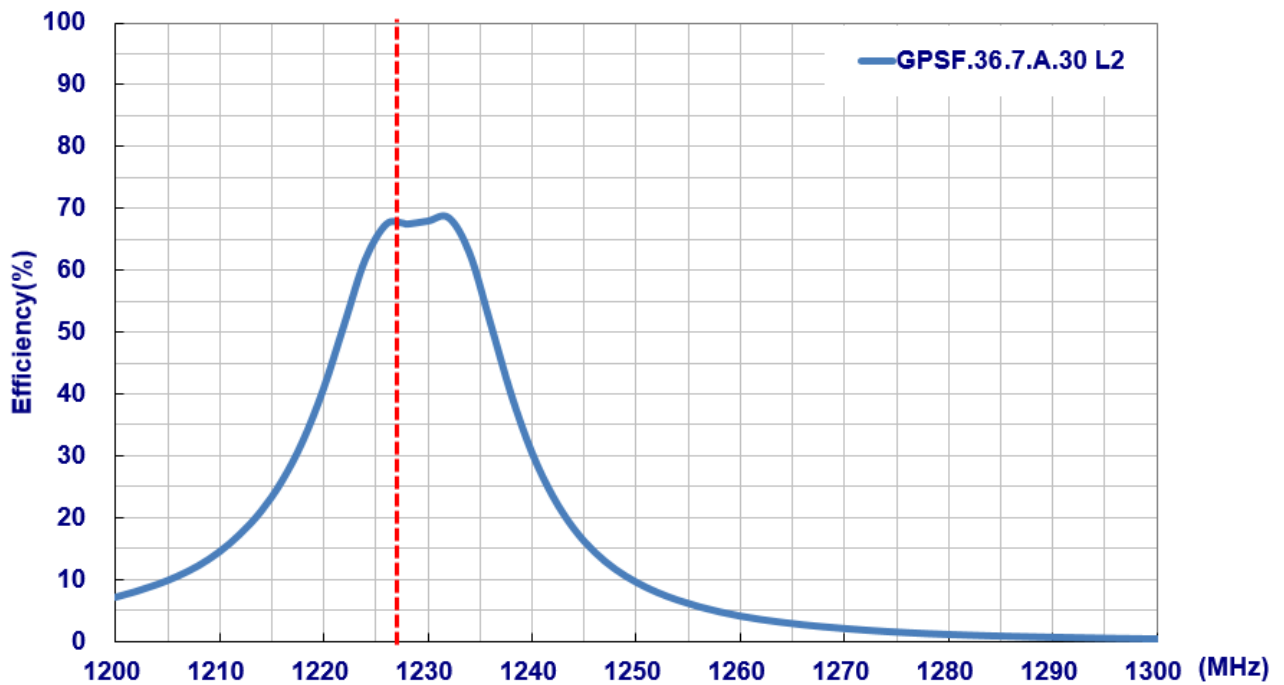
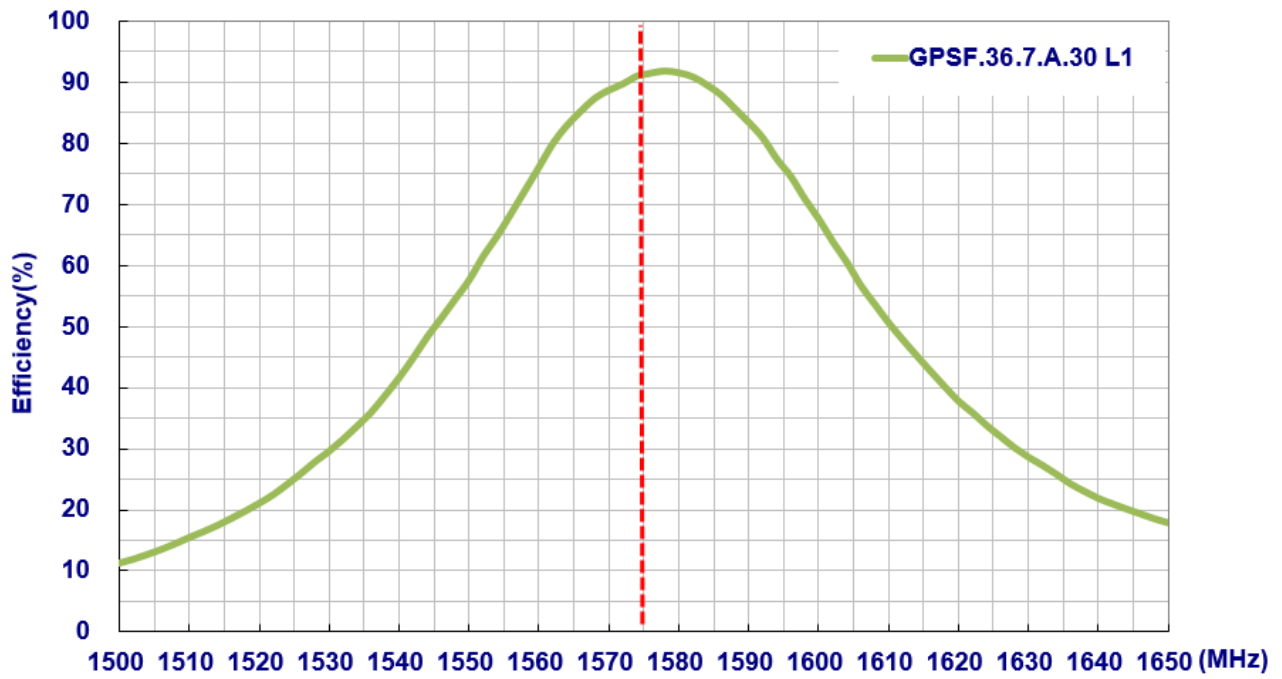





### 3.3 Peak Gain

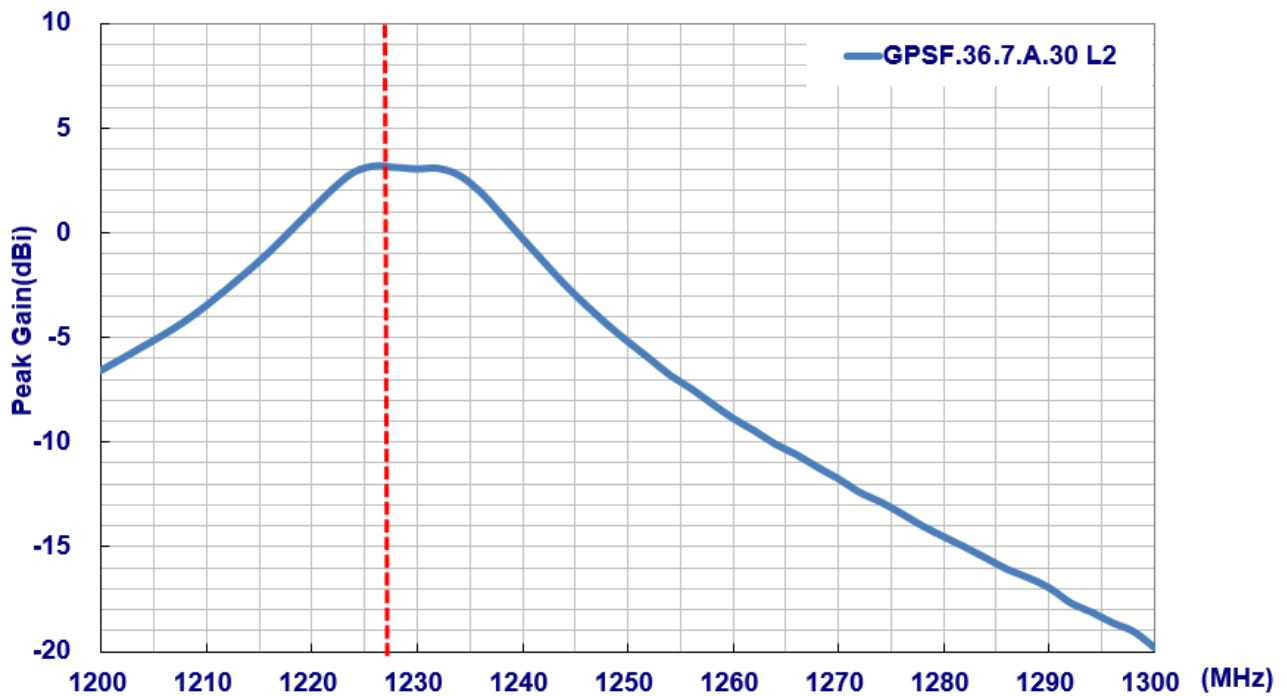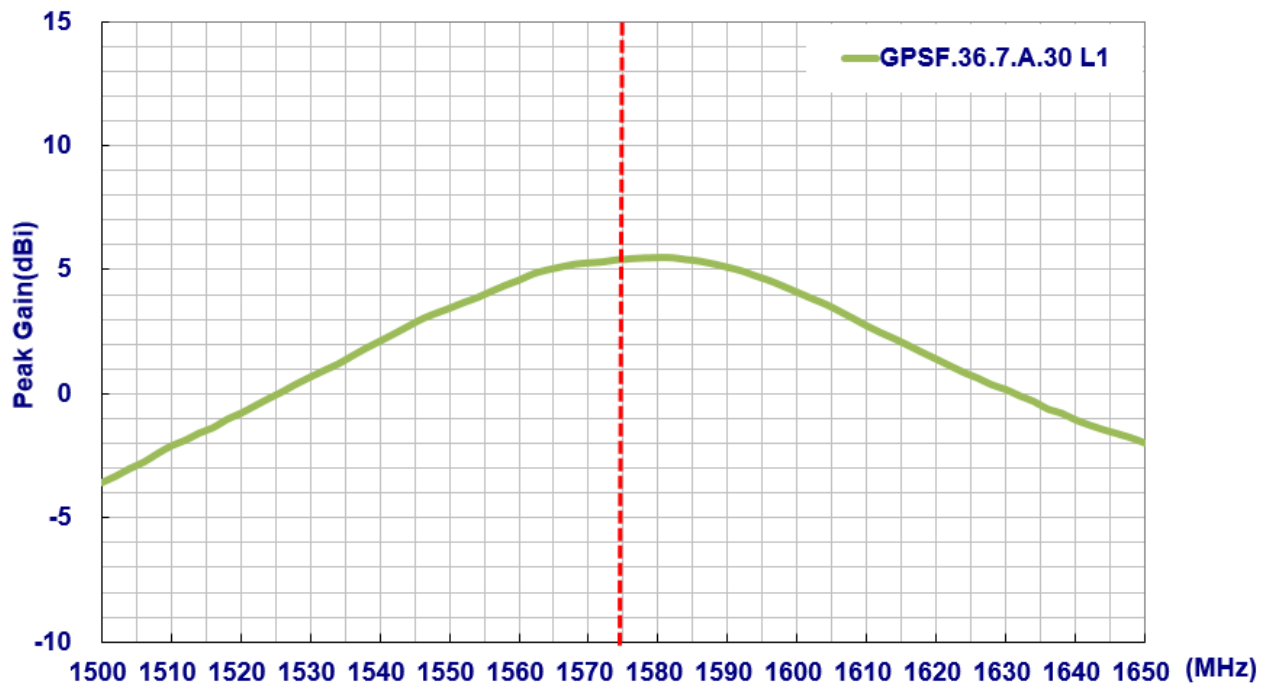

### 3.4 Average Gain

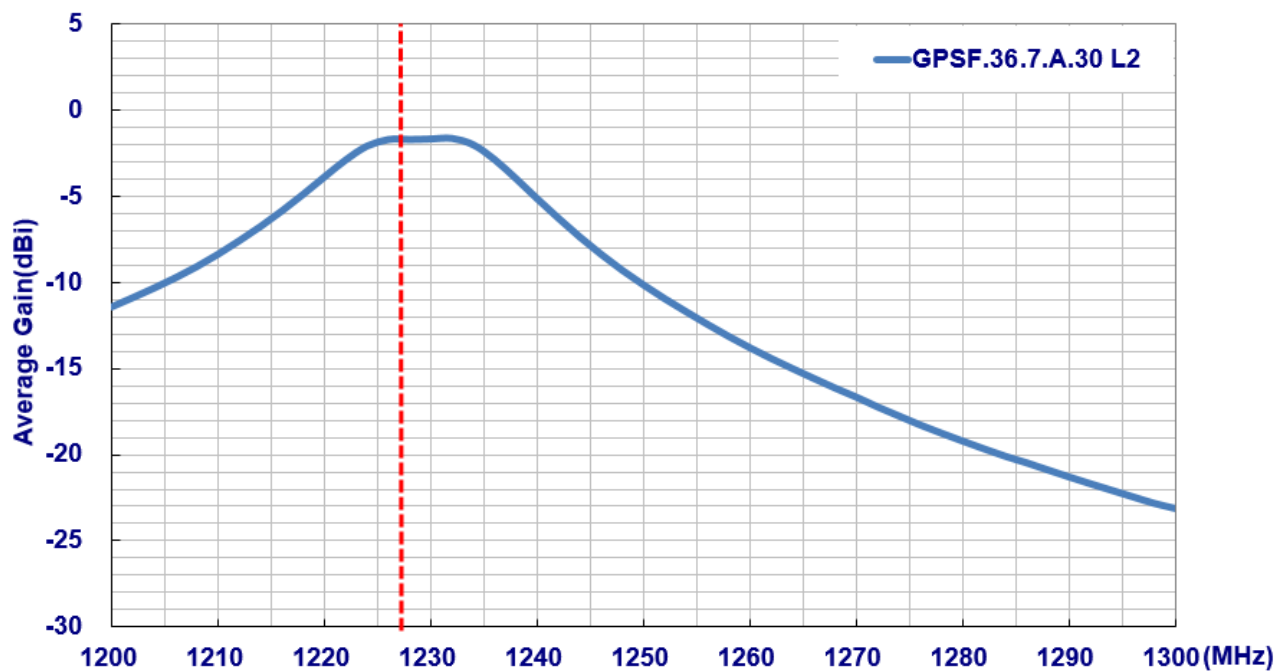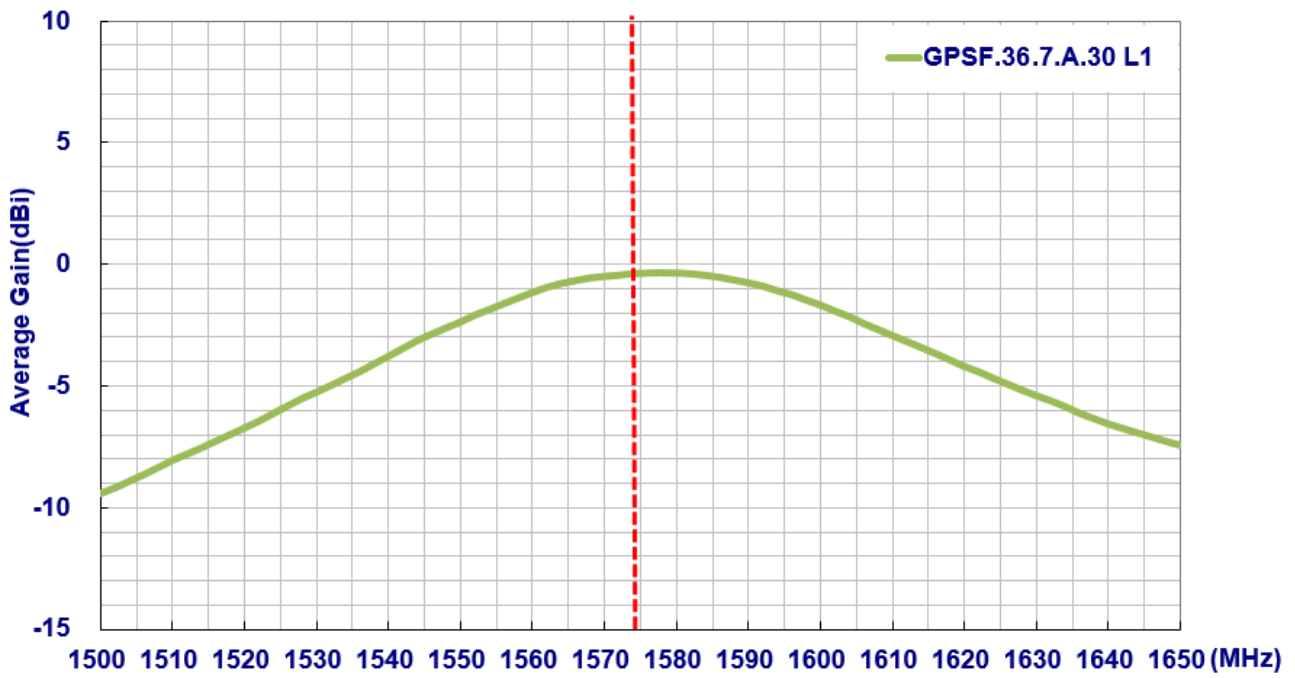


3.5 Axial Ratio

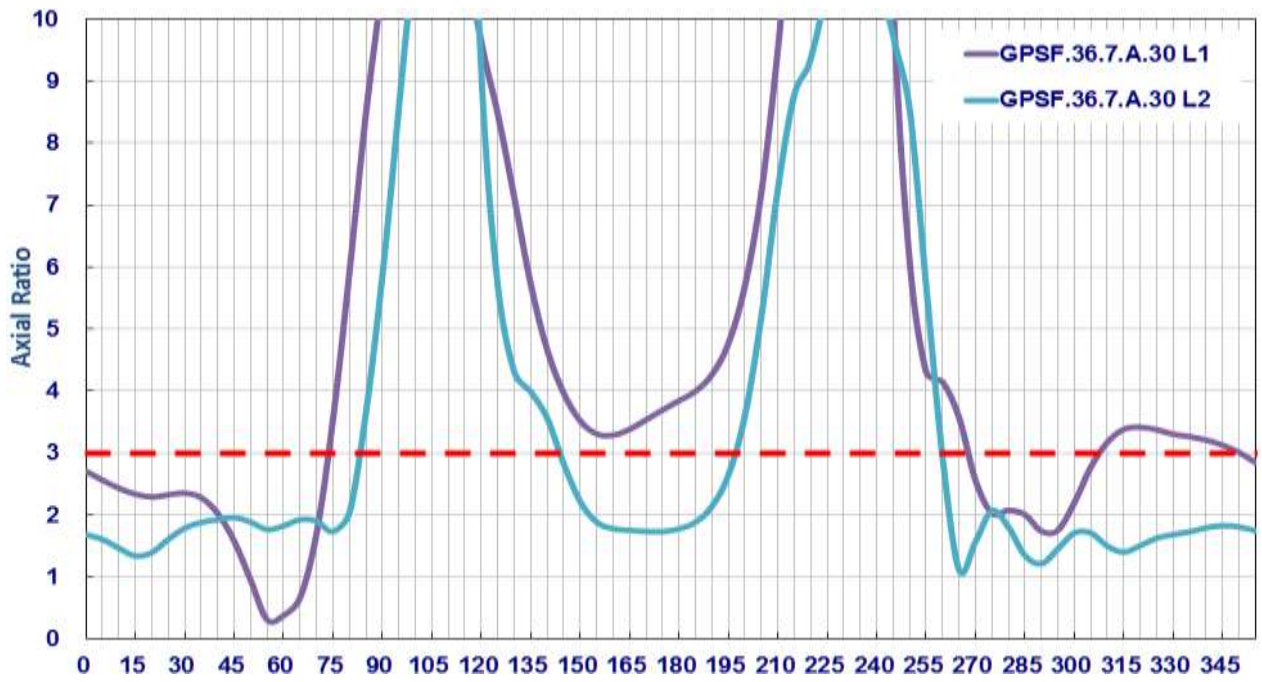


## 4. Radiation Patterns

### 4.1 Test Setup


The GPSF.36.7.A.30 antenna is tested in free-space on a 70 mm X 70 mm ground plane in an Anechoic Chamber. The test setup is shown below.

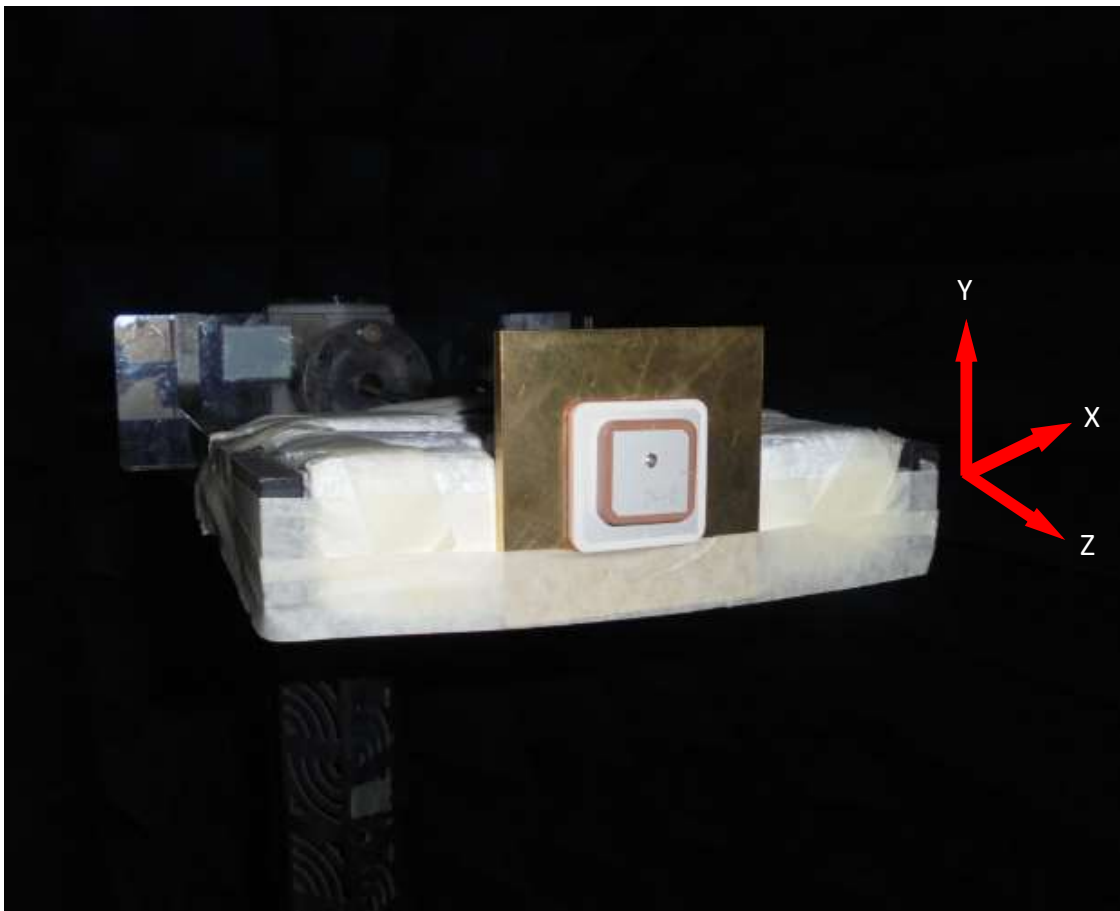

4.2 3D and 2D Radiation Patterns

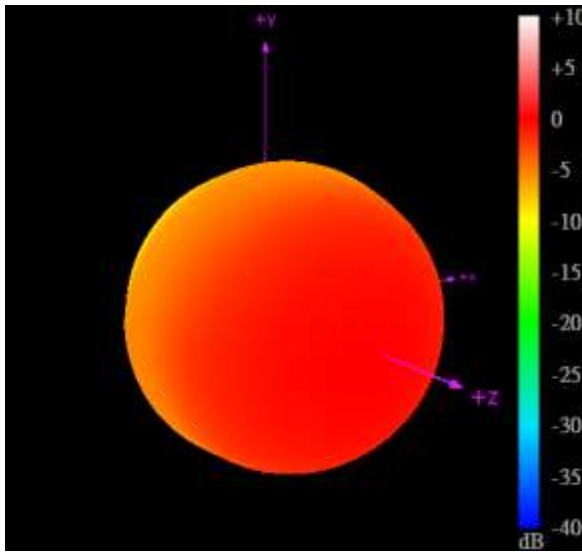

L1 1575.42MHz



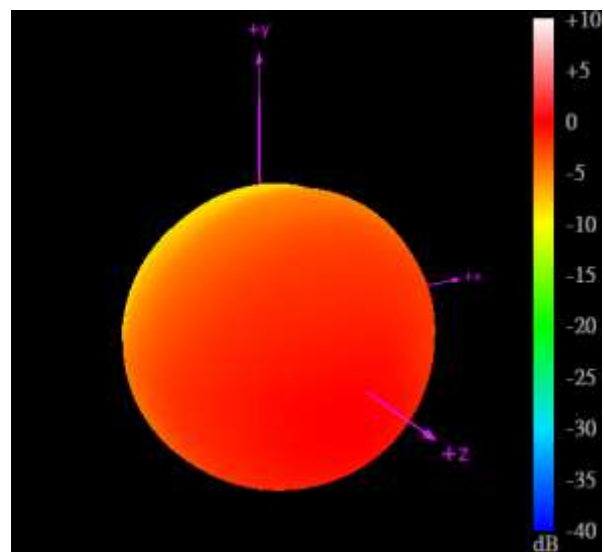


L2 1227.6MHz


XY Plane

XZ Plane

YZ Plane

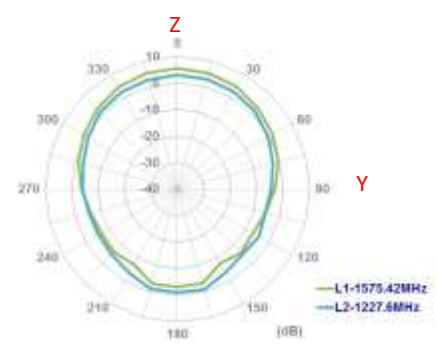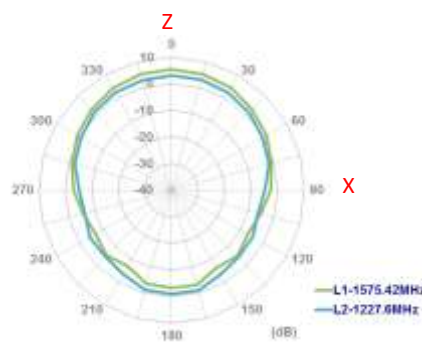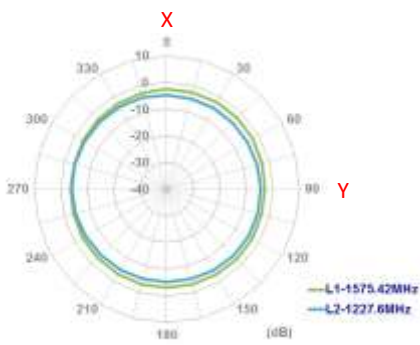


# 5. Mechanical Drawing (Units: mm)

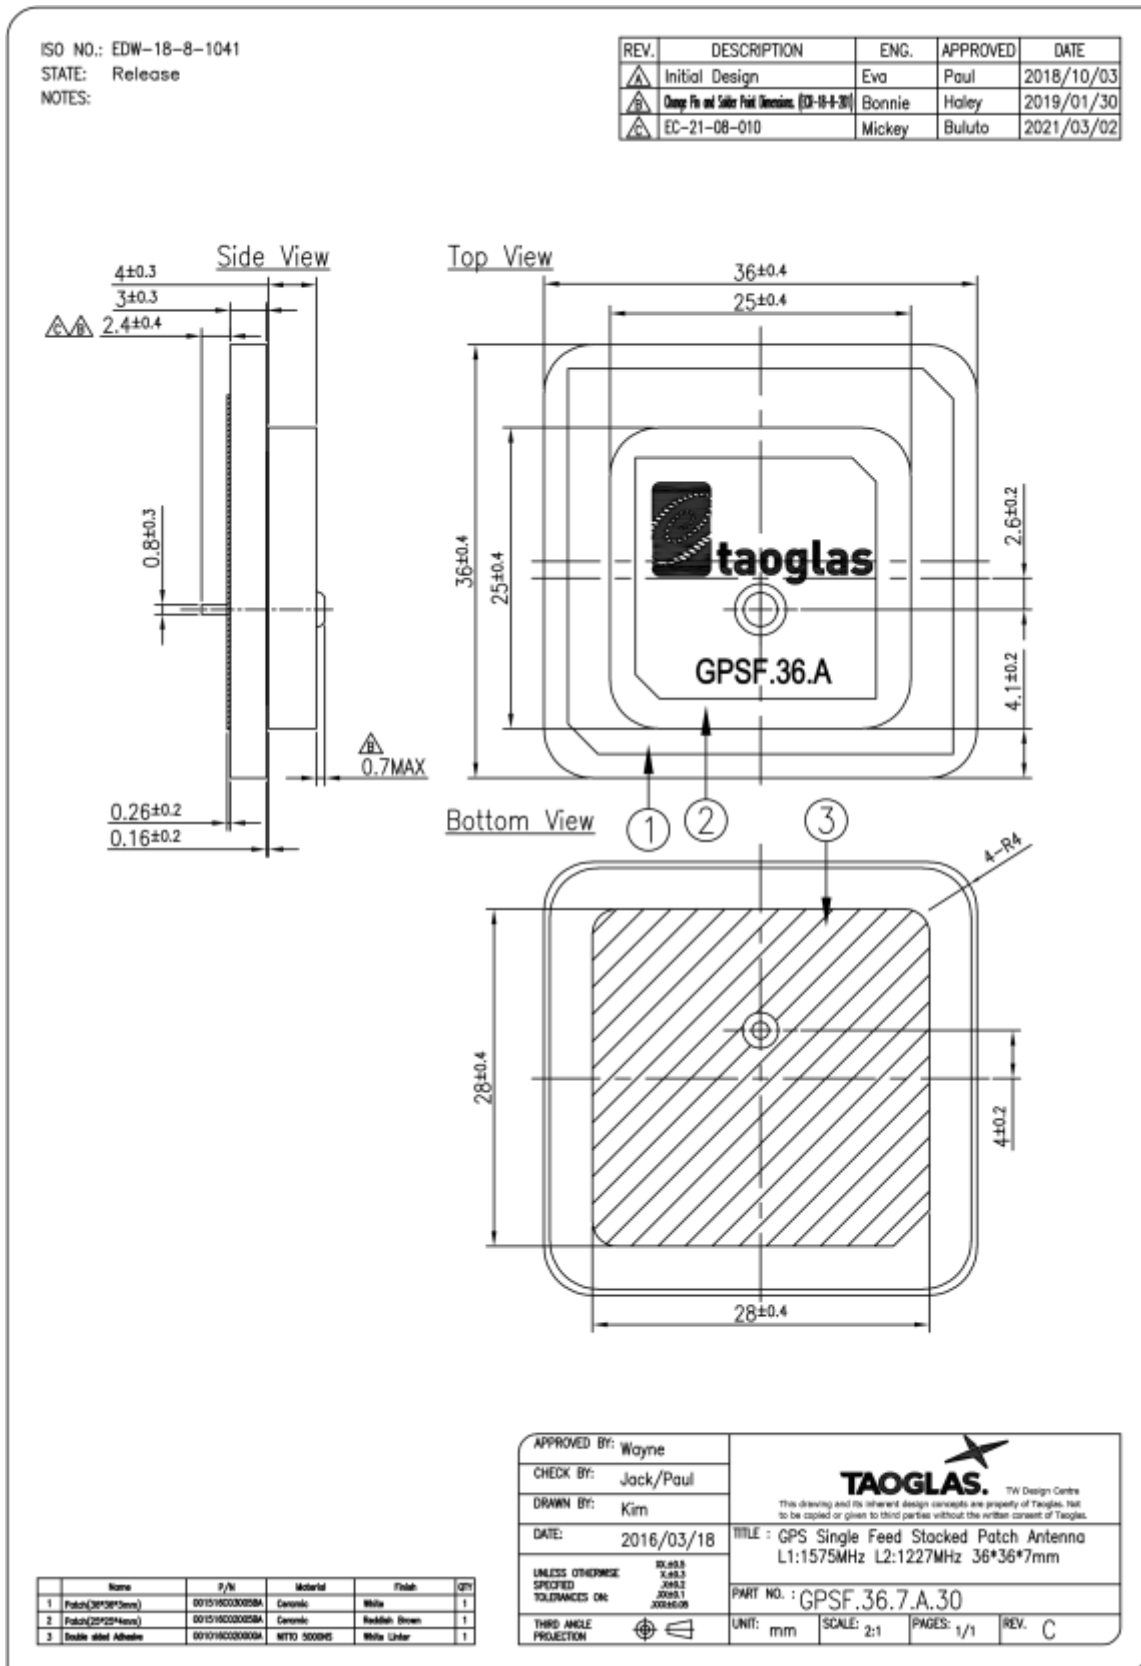


## 6. Packaging

### Packaging Specifications


25 pcs GPSF.36.7.A.30 per tray  
 Each tray in vacuumed PE bag  
 Tray Dimensions - 340\*340\*27mm  
 Weight - .7Kg per tray

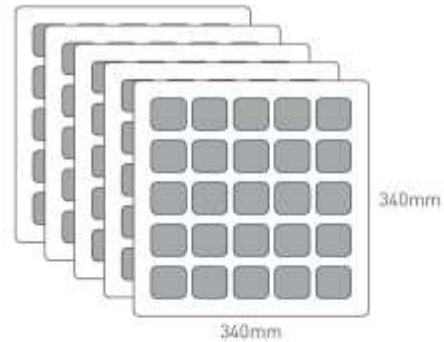


8 Trays per Carton - 200 pcs  
 Carton Dimensions - 250\*250\*120mm  
 Weight - 5.5Kg



400 pcs - Carton Dimensions - 500\*260\*125mm  
 Weight - 12Kg

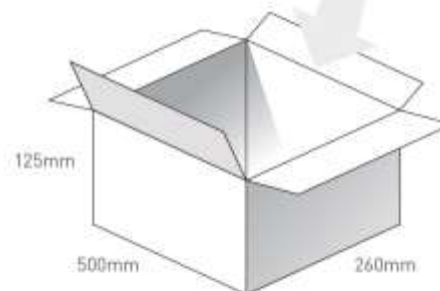

Pallet Dimensions 1200\*1000\*1500mm  
 80 Cartons per Pallet  
 10 Cartons per layer  
 8 Layers

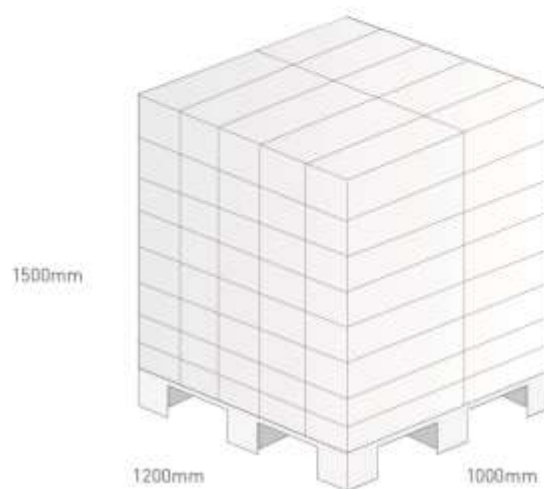

Changelog for the datasheet

**SPE-17-8-027 - GPSF.36.7.A.30**

**Revision: E (Current Version)**

Date:	2021-07-08
Changes:	Updated cover page and spec table (band coverage)
Changes Made by:	Gary West

**Previous Revisions**

**Revision: D**

Date:	2021-06-19
Changes:	Updated Pin Length to 2.4mm Updated Drawing
Changes Made by:	Dan Cantwell

**Revision: C**

Date:	2019-12-08
Changes:	Amended GNSS data and drawing
Changes Made by:	Jack Conroy

**Revision: B**

Date:	2019-12-08
Changes:	Added GNSS Frequency Bands Matrix and RTK Test Data
Changes Made by:	Yu Kai Yeung

**Revision: A (Original First Release)**

Date:	2017-03-05
Notes:	Initial Release
Author:	Wayne Yang





[www.taoglas.com](http://www.taoglas.com)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antennas](#) category:*

*Click to view products by [Taoglas](#) manufacturer:*

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-](#)  
[30RSMM](#) [108-00014-50](#) [66089-2406](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-](#)  
[915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [GD5W-](#)  
[28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [EXB144SM](#) [C37](#) [MAF94051](#) [P1744](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#)  
[MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)