

5.8GHz 5dBi Terminal Mount Dipole Antenna

Part No: GW.82.5153

Description:

Wi-Fi 5.8GHz 5dBi Terminal Mount Dipole Antenna Hinged RP-SMA(M

Features:

5.8GHz Band Operation

5dBi Gain

High Efficiency up to 78%

Hinged RP-SMA (M) Connector

Height: 198mm

Diameter: 13mm

RoHS & Reach Compliant



 Introduction Specifications Antenna Characteristics Radiation Patterns Mechanical Drawing
 3. Antenna Characteristics 4. Radiation Patterns 5. Mechanical Drawing 10
4. Radiation Patterns 75. Mechanical Drawing 10
5. Mechanical Drawing 10
6. Packaging 11
Changelog 12

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.















The Taoglas GW.82 is a 5.8GHz Wi-Fi terminal mount 5dBi dipole antenna. At just 198mm in height and 13mm in diameter, the robust TPEE enclosure can be mounted straight or at right angle to the device with its hinged RP-SMA(M) connector. It is ideal for applications such as Bluetooth, BLE, ZigBee and Wireless LAN. The GW.82, designed for superior performance and reliability, has an omnidirectional radiation pattern and extremely high efficiency and gain on the 5.8GHz band.

Typical applications include:

- Smart Home - Gateways/Routers - Connected Agriculture

The GW.82 has up to 5dBi Peak making it a cost-effective, high-performing choice for any indoor or outdoor application. Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when installed. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect. This provides you with improved performance. Upon testing of any of our antennas with your device and appropriate layout, integration technique, or cable, we can work with you to make any of our antennas' perform below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits. You can be assured that you are meeting the regulatory requirements for that module whilst getting the best performance possible, without exceeding the peak gain limits.

For further information, or support to test and integrate this product please contact your regional Taoglas customer support team.




2. Specifications

Electrical		
Frequency (MHz)	5150~5850	
Efficiency (%)		
Straight	76.14	
Bent	77.94	
Average Gain (dB)		
Straight	-1.18	
Bent	-1.08	
Peak Gain (dBi)		
Straight	5.64	
Bent	6.53	
Impedance	50 Ω	
Polarization	Linear	
Radiation Pattern	Omni	
Max. input power	1W	
Mechanical		
Height	198 ±3.3 mm	
Planner Dimension	198*ø13 mm	
Casing	TPEE	
Connector	RP-SMA(M)	
Weight	22.5 g	
Environmental		
Temperature Range	-40°C to 85°C	
Humidity	Non-condensing 65°C 95% RH	




3. Antenna Characteristics

3.1 Return Loss

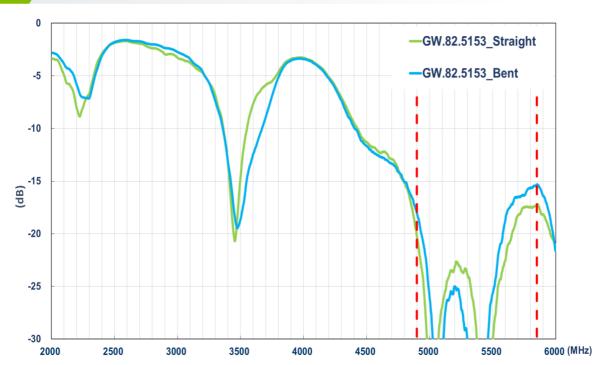


3.2 Efficiency

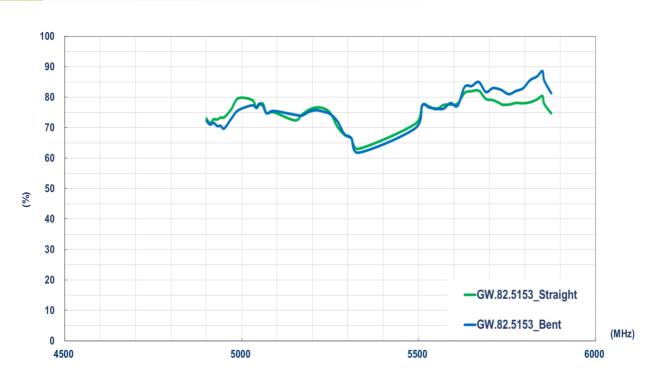




3.3 Average Gain

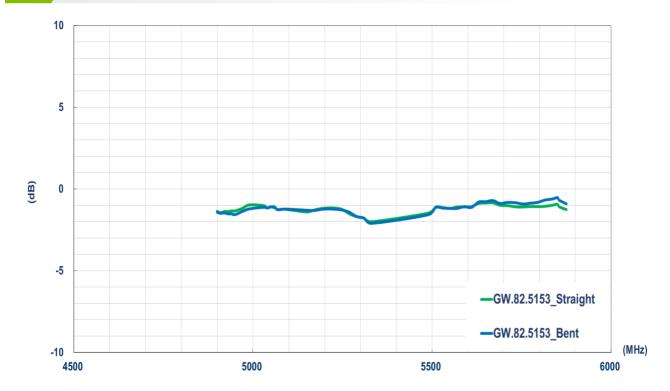

3.4 Peak Gain

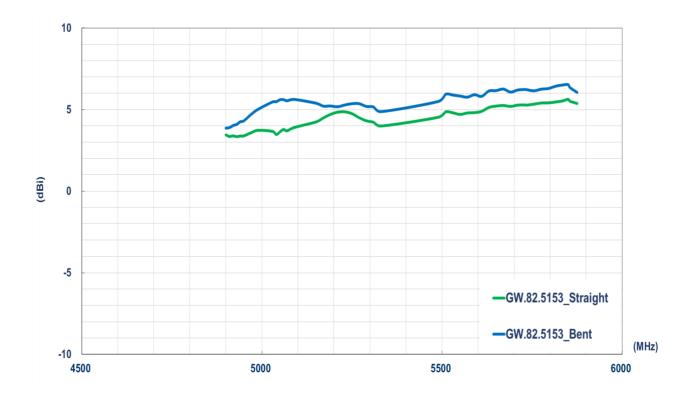



4. Radiation Patterns

4.1 Test Setup




Free space - Straight




Free space - Bent




4.2 5550MHz 3D and 2D Radiation Patterns - Straight

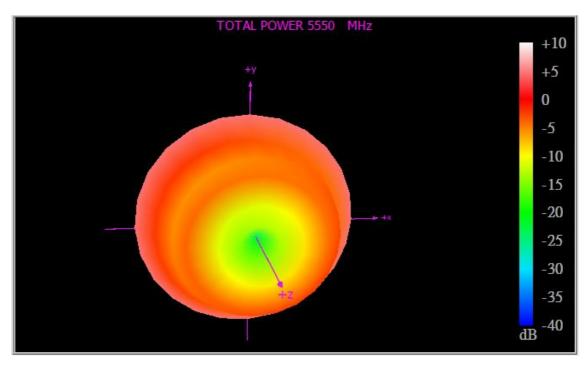


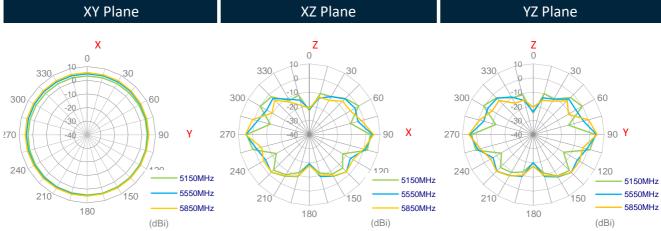




4.2 5550MHz 3D and 2D Radiation Patterns - Bent

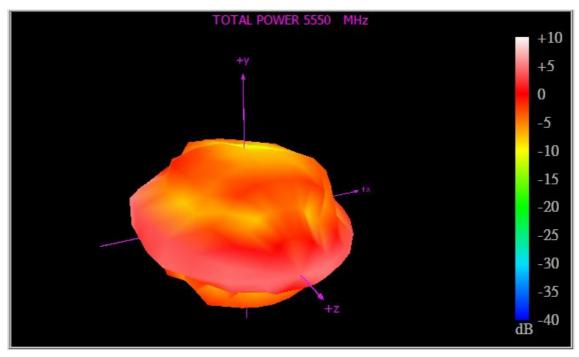

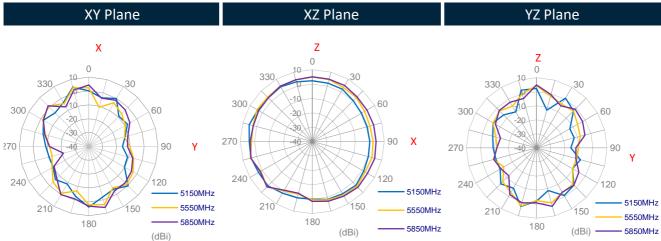



5. Mechanical Drawing (Units: mm)

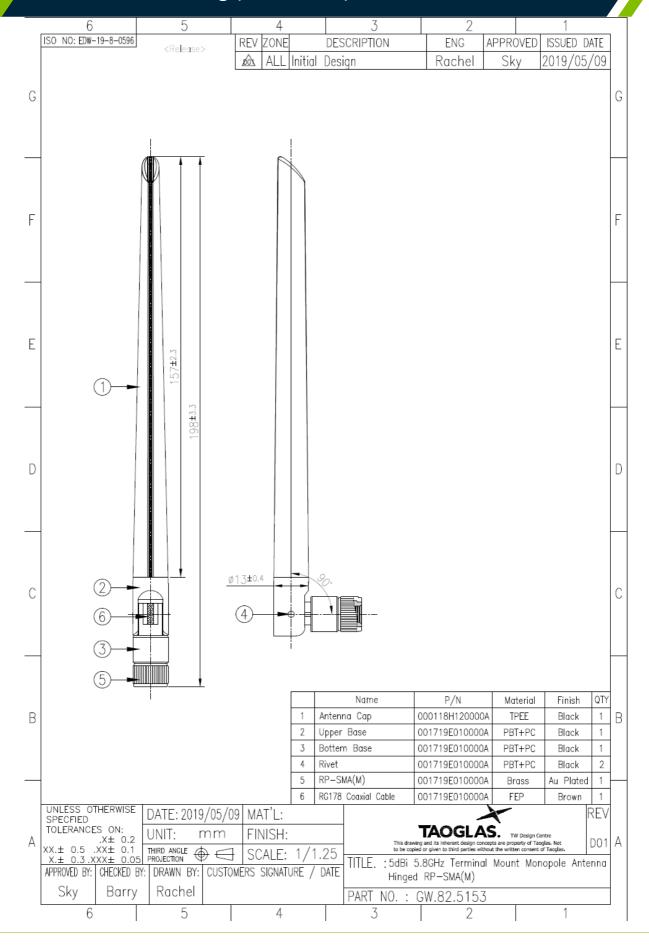




6. Packaging

1pc GW.82.5153 per PE Bag Bag Dimension: 245*30mm

Weight: 22.5g

245mm


40pcs GW.82.5153 per Large PE Bag Bag Dimensions: 320*205mm Weight: 0.9Kg

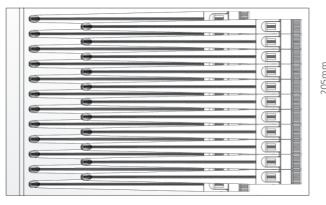


320mm

400pcs GW.82.5153 per Carton Dimensions: 320*250*230mm

Weight: 10Kg

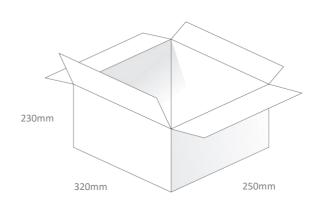

Pallet Dimensions: 1200*1000*1350mm 60 Cartons Per Pallet 12 Cartons Per Layer, 5 Layers

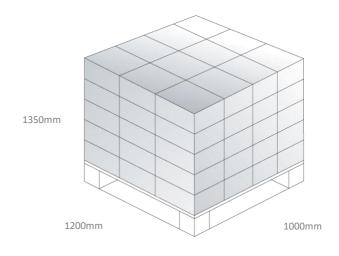



Changelog for the datasheet SPE-19-8-092 – GW.82.5153 Revision: A (Original First Release) Date: 2019-06-28 Notes: Author: Jack Conroy

Previous Revisions		



www.taoglas.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Taoglas manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352