

Specification

Part No.	:	TG.08.0723
Product Name	:	Cellular and GPS/GLONASS/GALILEO/BEIDOU Hinged Fakra Connector Mount Antenna
Features	:	Compact Passive Monopole Antenna High Efficiencies at Cellular and GNSS frequencies Fits in places other antennas just don't 360° rotatable with durable brass hinge Compatible with: - 2G (GSM / DCS / PCS) - 3G (CDMA / WCDMA / UMTS / HSPA) - 4G (LTE) - GNSS (GPS / GLONASS / GALILEO/ BEIDOU) Fakra Code D Bordeaux Violet SMB(F) Connector Length: 79.5mm ROHS Compliant





1. Introduction

The compact TG.08 with hinged rotatable Fakra Code D connector is a monopole antenna for automotive telematics applications that provides wide coverage among cellular and GNSS frequencies and offers impressively high efficiencies. It fits in crowded device environments.

It's robust brass hinge enables TG.08 to be oriented in all directions, allowing users to maximize performance with minimum effort. The Fakra connector gives additional mechanical robustness over a traditional SMA connector since it locks securely with its mate and will not come loose due to vibrations or impacts.

This 72mm long monopole antenna has good efficiency in the 700MHz to 2700MHz range, covering the 2G/3G/4G bands, as well as GPS/GLONASS/BEIDOU. When connected to a ground plane, it can achieve up to 75% efficiency at GPS and LTE bands.

With its cellular and GNSS function, plus compact design, TG.08 is a great antenna for routers, vehicle tracking devices, telematic devices, and remote monitoring systems. It is also ideal for use in cellular modules with Assisted GPS functionality that can be implemented in various devices.

As with all monopole antennas, TG.08 works best when connecting directly to the ground-plane of the device main-board or to the device's metal enclosure. For optimum radiation efficiency care should be taken to keep the radiating element of the antenna as far away from metal as possible.





2. Specification

Parameter										
Straight Position										
Band		700LTE	GSM	BEIDOU	GPS	GLONASS	DCS	PCS	UMTS/ HSPA	2700LTE
Frequency (MHz)		703~ 803	824~ 960	1561	1575.42	1602	1710~ 1880	1850~ 1990	1920~ 2170	2490~ 2690
Average Gain (dBi)	In Free Space	-7.08	-3.34	-2.69	-2.64	-2.19	-2.27	-2.36	-2.47	-4.08
Efficiency (%)		19.93	46.55	53.87	54.45	60.38	59.31	58.12	56.62	39.81
Peak Gain (dBi)		-1.96	1.82	1.87	1.88	2.30	3.43	3.55	3.55	3.62
Return Loss (dB)		< -2	< -4	< -9	< -8	< -8	< -10	< -8	< -5	< -3
Average Gain (dBi)	With 15x9cm Ground	-2.16	-2.40	-2.01	-1.92	-1.67	-2.74	-2.42	-2.37	-6.30
Efficiency (%)		61.04	57.99	63.01	64.29	68.15	53.30	57.34	58.00	23.88
Peak Gain (dBi)		1.61	1.55	2.00	2.04	2.20	2.99	3.95	4.72	0.54
Return Loss (dB)		< -8	< -5	< -10	< -10	< -10	< -6	< -6	< -7	< -2
Average Gain (dBi)	On 30x30cm Ground Metal Edge	-1.76	-1.80	-1.06	-1.19	-1.15	-1.66	-1.22	-1.19	-4.03
Efficiency (%)		67.10	66.26	78.34	75.97	76.77	68.30	75.58	76.02	40.15
Peak Gain (dBi)		2.09	1.35	4.27	4.18	4.37	3.48	3.70	4.28	3.65
Return Loss (dB)		< -8	< -6	< -10	< -10	< -10	< -9	< -10	< -10	< -4
Average Gain (dBi)	On 30x30cm Ground Metal Center	-3.49	-1.98	-3.43	-3.37	-3.35	-3.34	-2.95	-2.66	-2.44
Efficiency (%)		46.33	63.95	45.36	46.07	46.20	46.41	50.82	54.33	57.42
Peak Gain (dBi)		1.37	2.52	1.47	1.50	1.43	1.17	1.76	2.68	3.40
Return Loss (dB)		< -3	< -4	< -6	< -5	< -5	< -3	< -3	< -4	< -6




Bent Position												
Average Gain (dBi)	In Free Space	-7.45	-3.54	-2.56	-2.54	-2.14	-2.30	-2.42	-2.57	-4.29		
Efficiency (%)		18.25	44.69	55.42	55.66	61.13	58.87	57.24	55.32	37.76		
Peak Gain		-2.75	1.68	2.17	2.19	2.57	3.28	3.41	3.41	3.26		
(dBi) Return Loss		< -2	< -4	< -8	< -7	< -7	< -10	< -8	< -4	< -3		
(dB) Average												
Gain (dBi) Efficiency		-2.52	-2.01	-2.10	-1.97	-1.68	-2.62	-2.34	-2.31	-6.36		
(%) Peak Gain	With 15x9cm	56.59	63.28	61.62	63.50	67.92	54.71	58.37	58.73	23.51		
(dBi)	Ground	1.47	1.55	2.40	2.44	2.62	3.05	4.04	4.67	0.35		
Return Loss (dB)		< -5	< -7	< -10	< -10	< -10	< -7	< -7	< -8	< -2		
Average Gain (dBi)	On	-2.22	-1.43	-1.06	-1.21	-1.14	-1.65	-1.24	-1.22	-3.29		
Efficiency (%)	30x30cm	61.30	72.15	78.32	75.76	76.86	68.38	75.28	75.55	47.63		
Peak Gain (dBi)	Ground Metal	2.46	2.50	3.94	3.81	3.87	3.04	3.97	4.44	4.37		
Return Loss (dB)	Edge	< -6	< -7	< -10	< -10	< -10	< -9	< -10	< -10	< -4		
Average Gain (dBi)		-6.65	-3.06	-2.28	-2.34	-2.44	-3.00	-2.82	-2.61	-2.71		
Efficiency	On 30x30cm	23.10	49.79	59.19	58.34	56.99	50.15	52.34	54.95	54.27		
(%) Peak Gain	Ground Metal	-0.80	1.78	2.03	1.93	1.79	1.56	1.87	2.69	3.30		
(dBi) Return Loss (dB)	Center	< -1	< -4	< -9	< -8	< -7	< -4	< -4	< -4	< -8		
Radiat	tion		Omni-directional									
Polarization			Linear									
Impeda	ance		50 Ω									
Input P	ower					10W						
Ante	MECHANICAL 79.5mm											
Antenna length Antenna Diameter			5mm									
Casing			РОМ									
Connector			Fakra Code D									
Weight			8.5g									
Oneratio	ENVIRONMENTAL -40°C ~ + 85°C											
Operation Temperature Storage Temperature			-40°C ~ + 85°C									
Humidity			Non-condensing 65°C 95% RH									
	,											




1. Antenna Characteristics

3.1 Testing setup


Straight Antenna Position



A) In free space



B) With 15*9cm ground



C) With 30*30cm ground metal edge



metal center

Bent Antenna Position

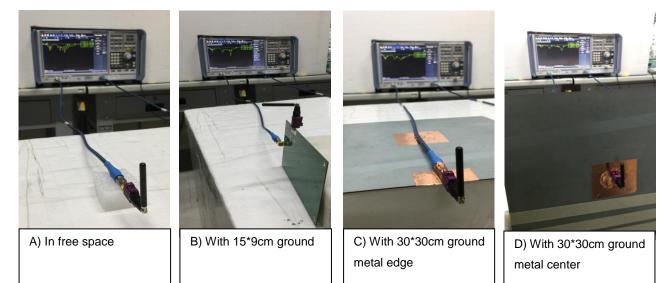


Figure 1. Measurement Environments





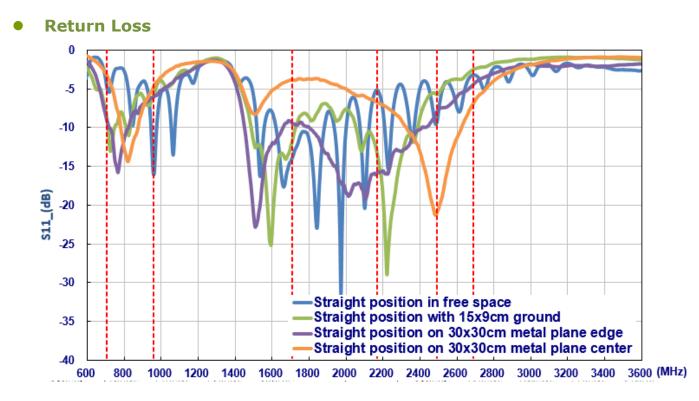


Figure 2. Return Loss of TG.08 antenna in straight position



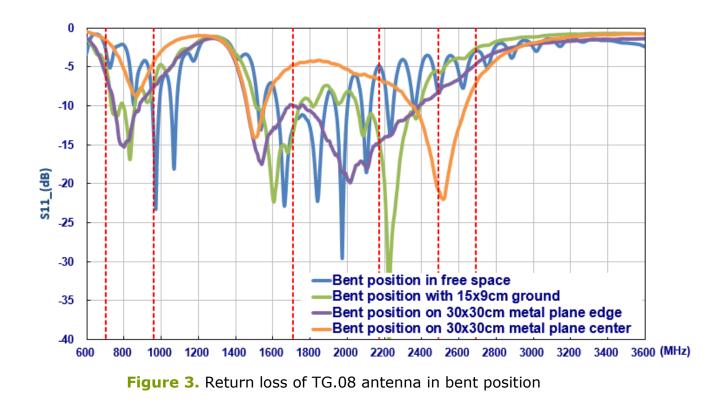

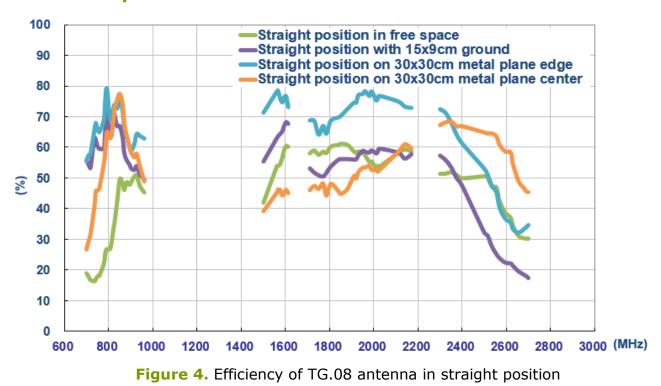

• Efficiency

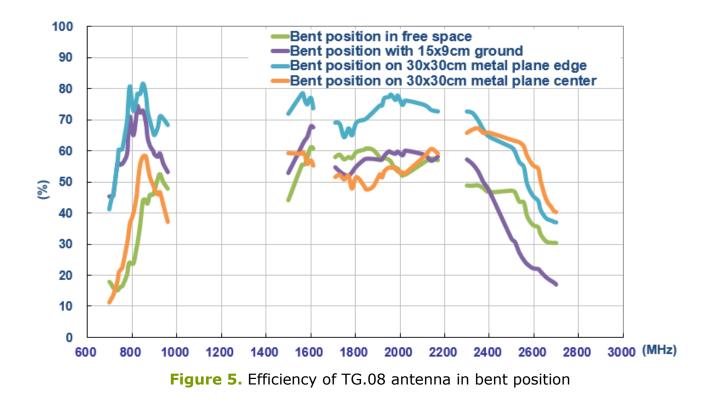






Figure 6. Peak gain of TG.08 antenna in straight position


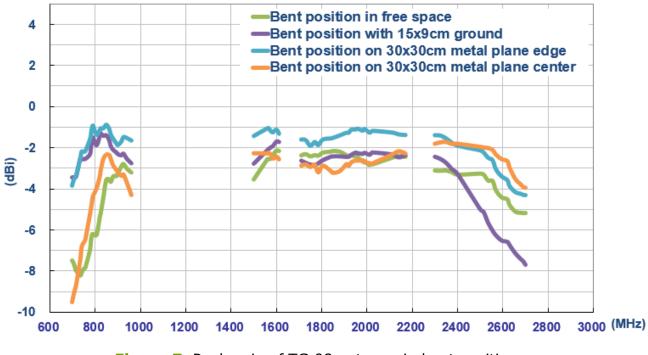


Figure 7. Peak gain of TG.08 antenna in bent position






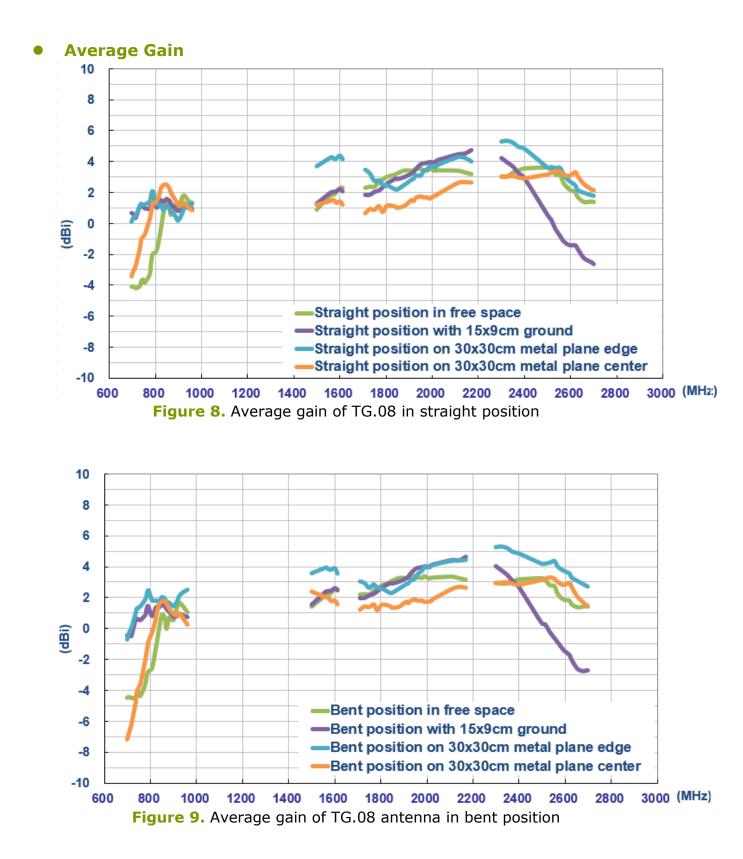

2. Antenna Radiation Patterns


The antenna radiation patterns were measured in a CTIA certified ETS Anechoic Chamber. The measurement setups are shown below.

Antenna with Straight Position




In free space

With 15x9cm ground plane




On 30x30cm metal ground edge




On 30x30cm metal ground center




Antenna Bent Position




In free space



On 30x30cm metal ground edge



With 15x9cm ground plane




On 30x30cm metal ground center

Figure 10. Testing Setup in ETS Anechoic Chamber



2D Radiation Pattern (Straight Position in Free Space)

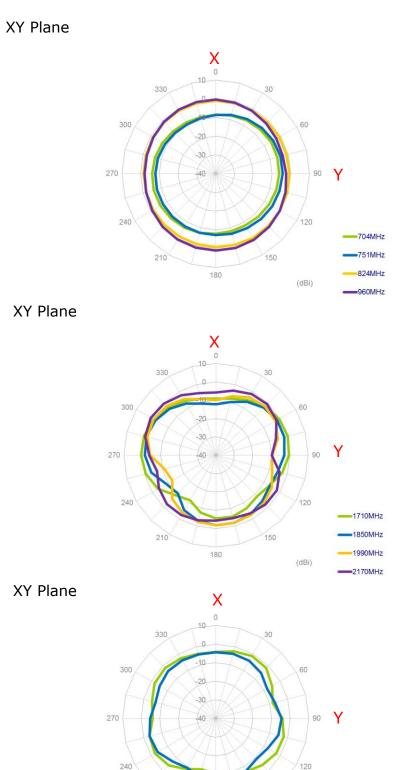

210

180

2500MHz


_____2690MHz

150


(dBi)













XZ Plane






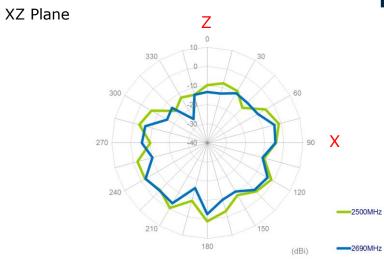


Ζ














YZ Plane














2D Radiation Pattern

(Straight Position with 15x9cm Ground)

XY Plane

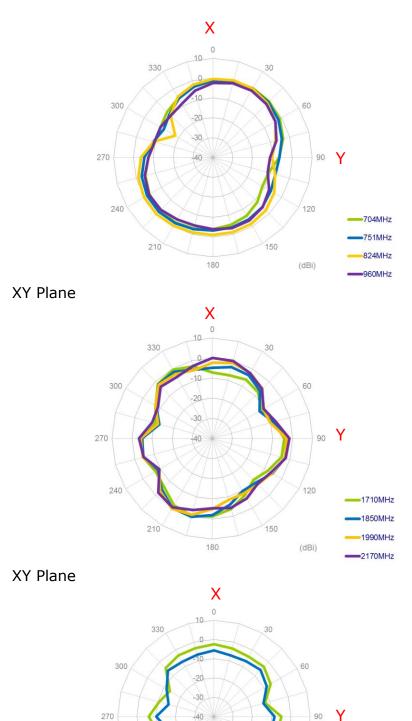

240

210

180

120


(dBi)

150


2500MHz

2690MHz




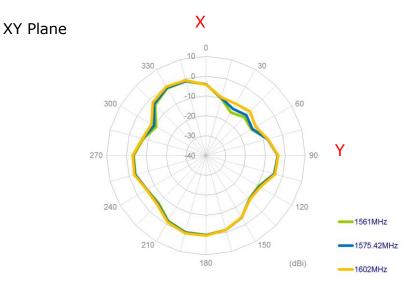














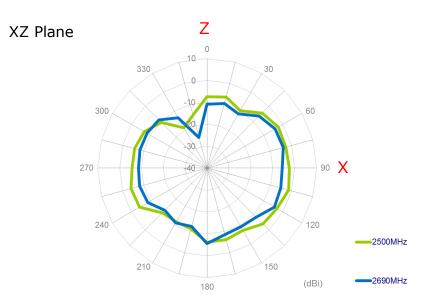













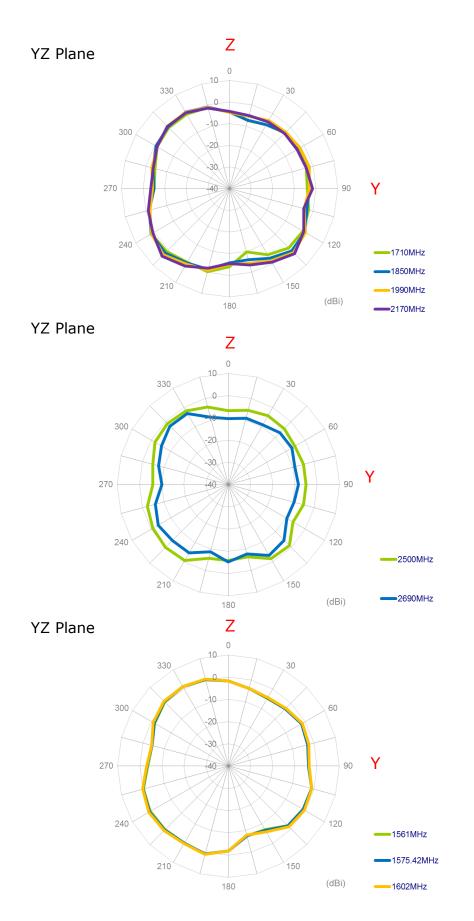





2D Radiation Pattern

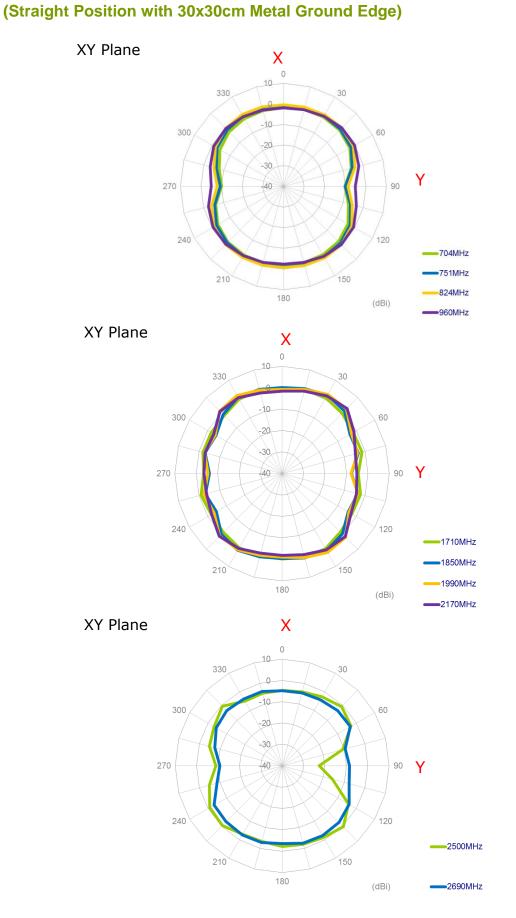




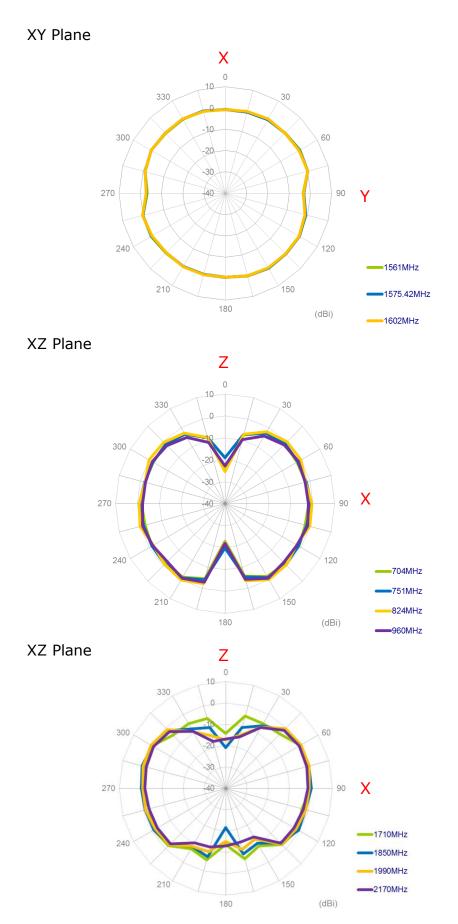




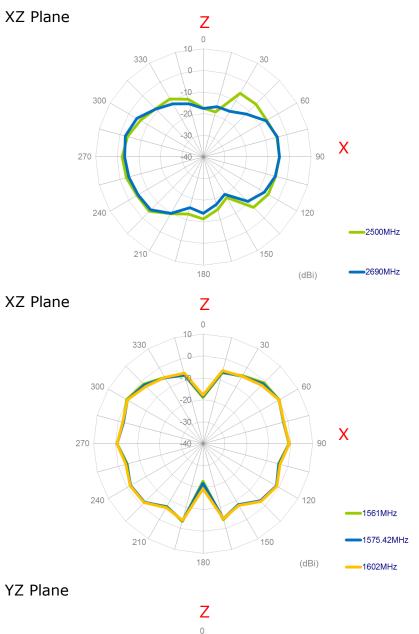





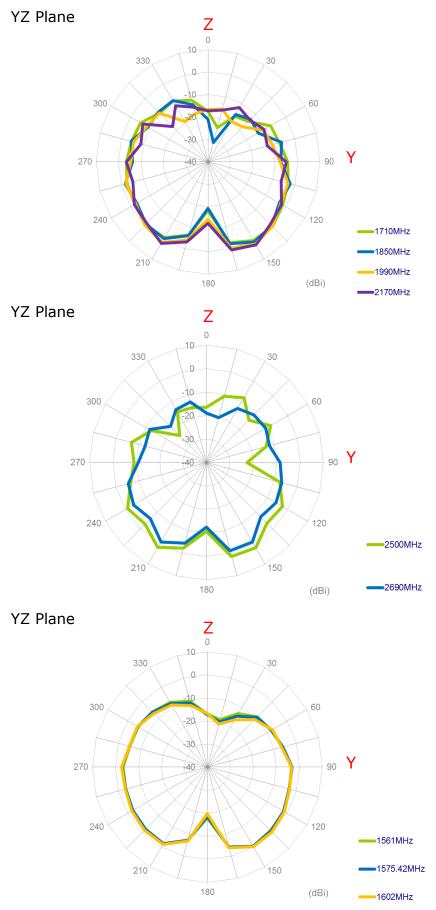




2D Radiation Pattern


(Straight Position with 30x30cm Metal Ground Center)

Х


XY Plane

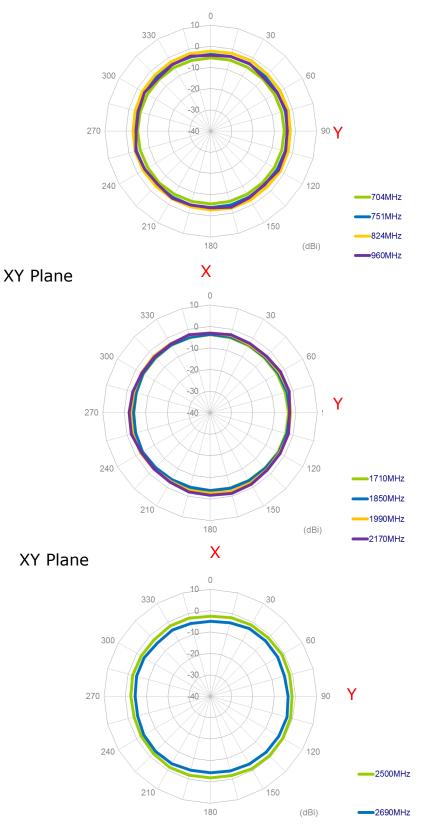



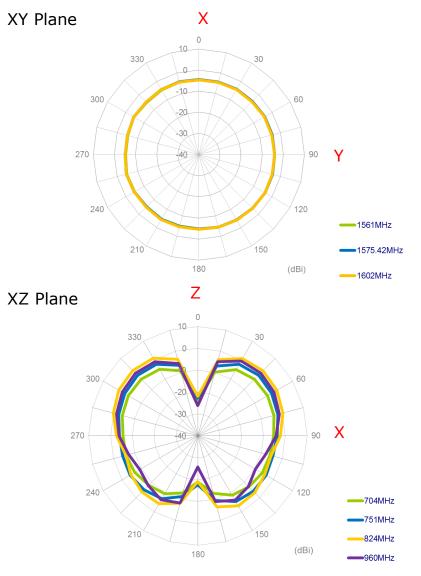






SPE-18-8-018/A/AW Page 25 of 70



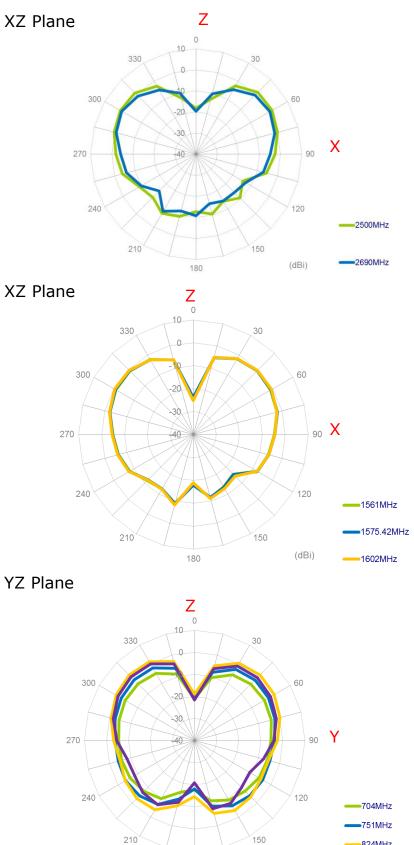

180


824MHz

960MHz


(dBi)




YZ Plane





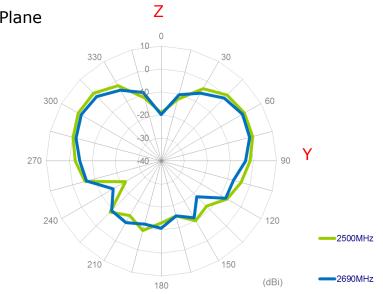




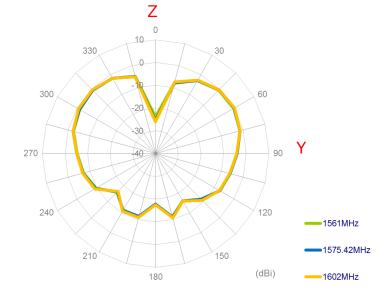





2D Radiation Pattern (Bent Position in Free Space)

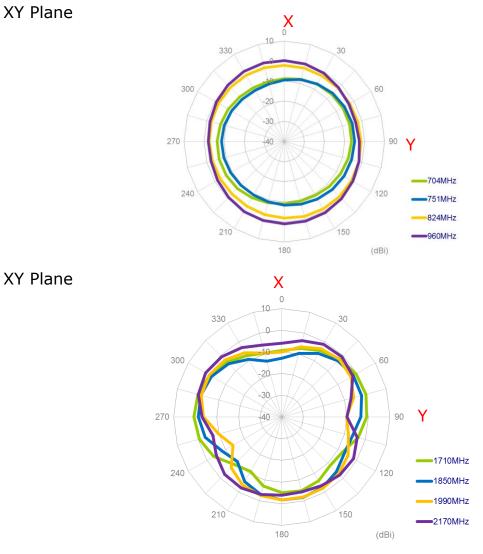



XY Plane






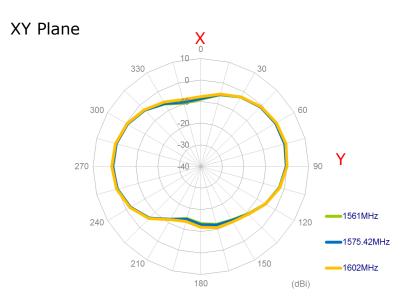


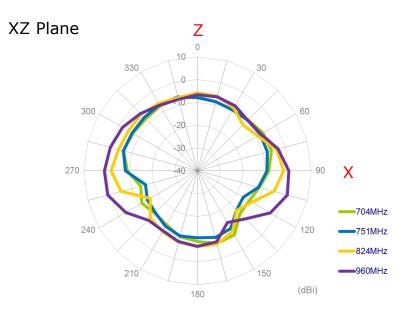

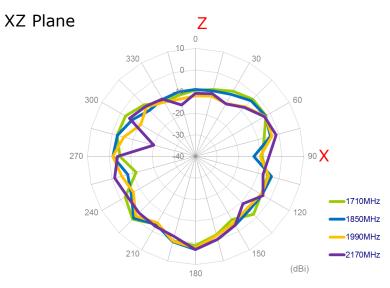




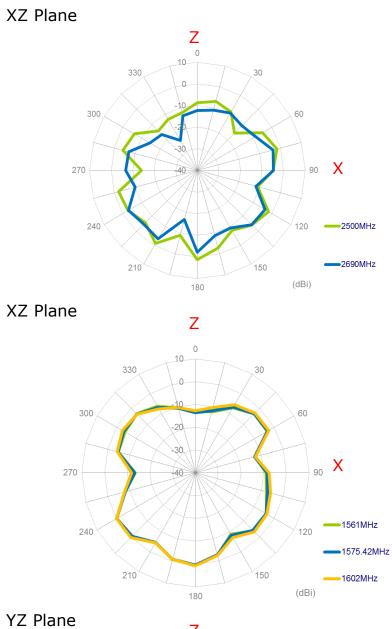






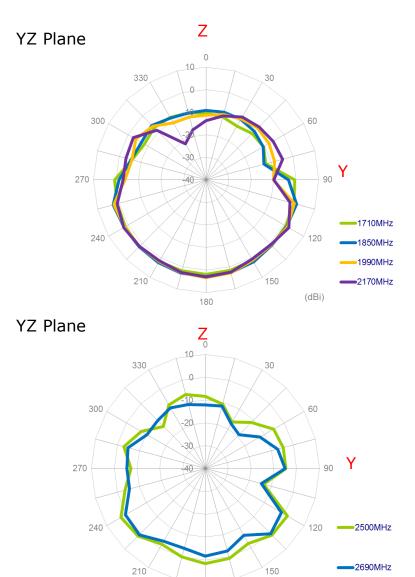






180


(dBi)




2D Radiation Pattern (Bent Position with 15x9cm Ground)

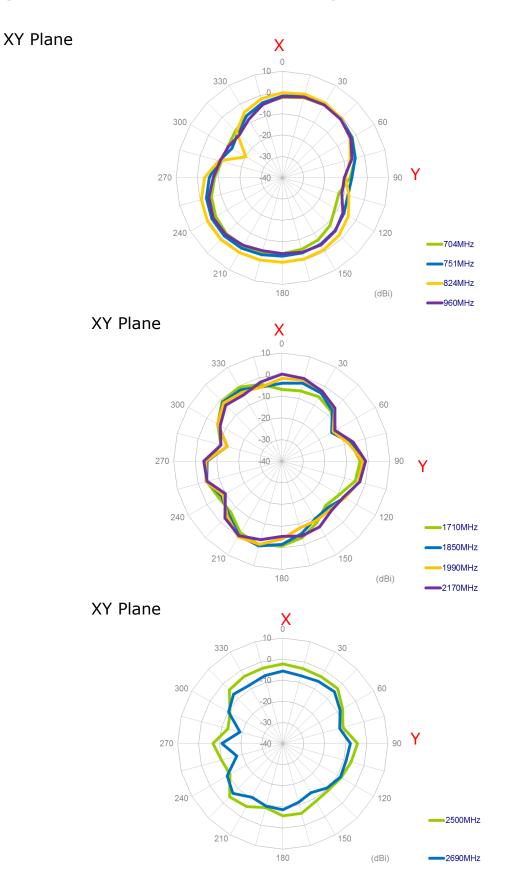




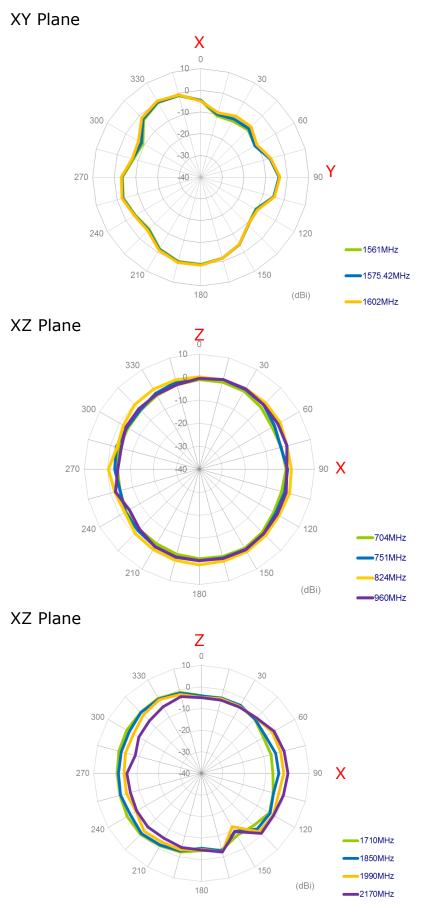




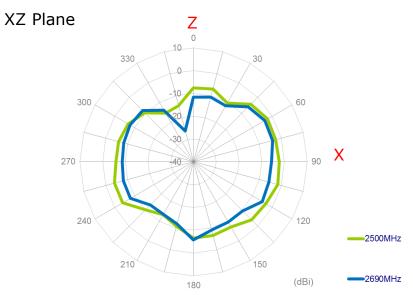




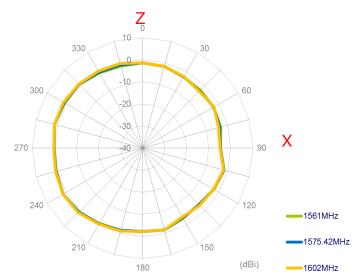









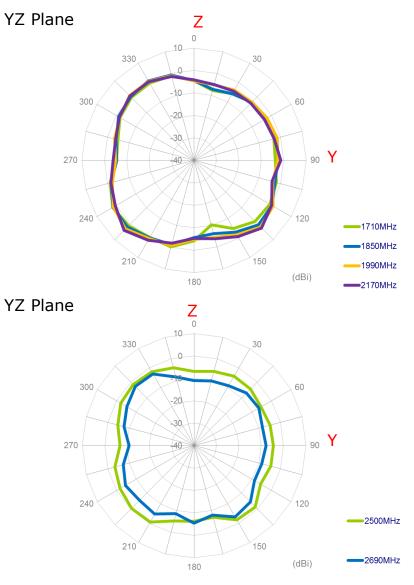

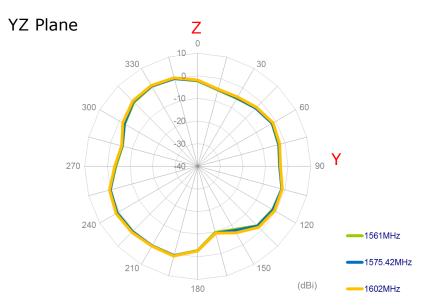





2D Radiation Pattern (Bent Position with 30x30cm Metal Ground Edge)

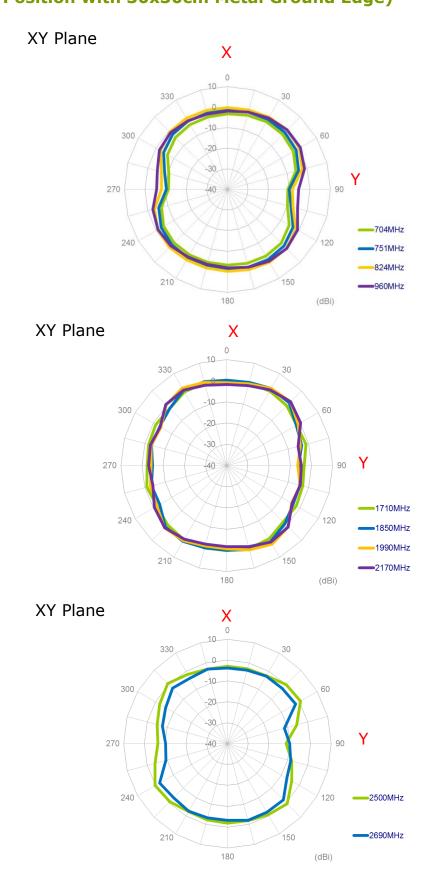




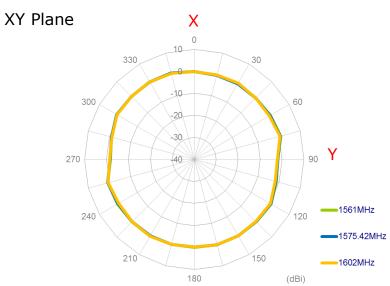









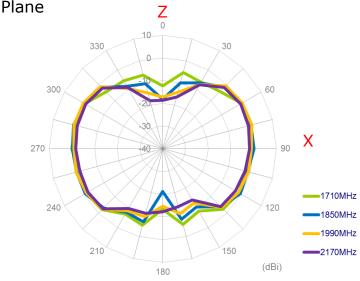




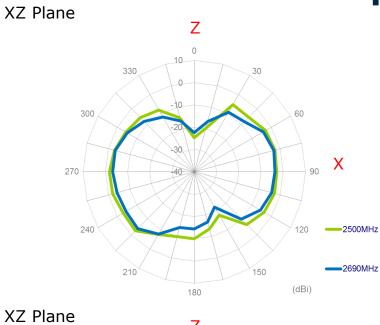


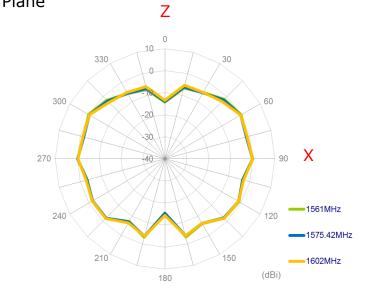









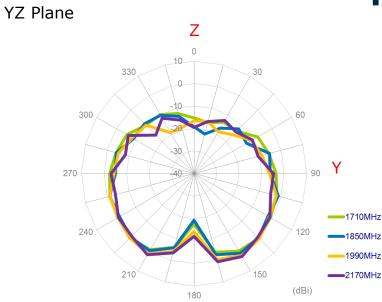





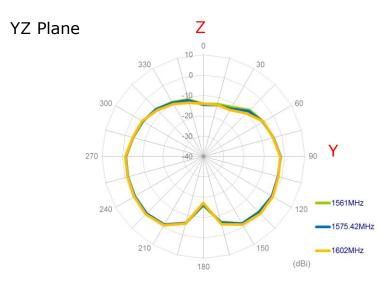




2D Radiation Pattern (Bent Position with 30*30cm Metal Ground Center)


Х

XY Plane

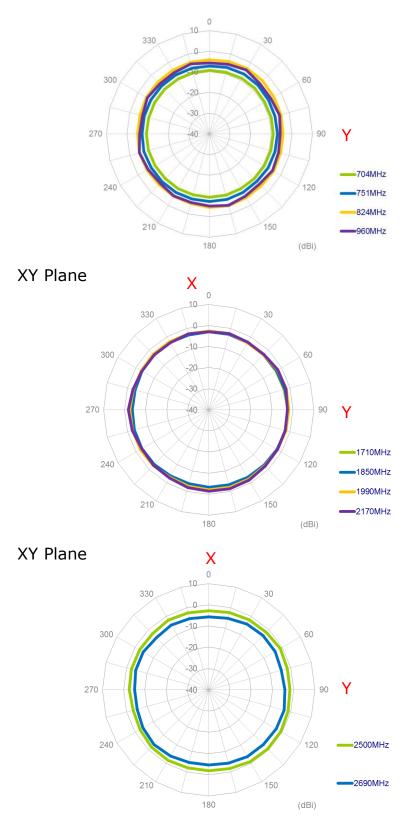





XY Plane








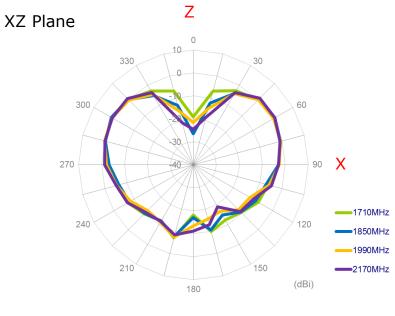


Ζ




XZ Plane






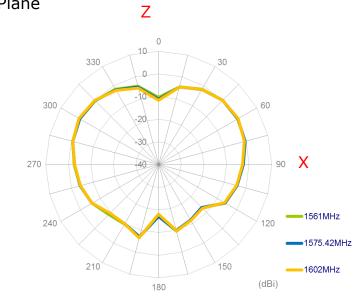








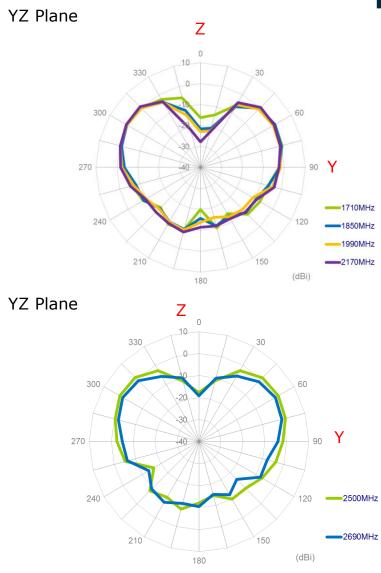











3D Radiation Pattern (Straight Position in Free Space)

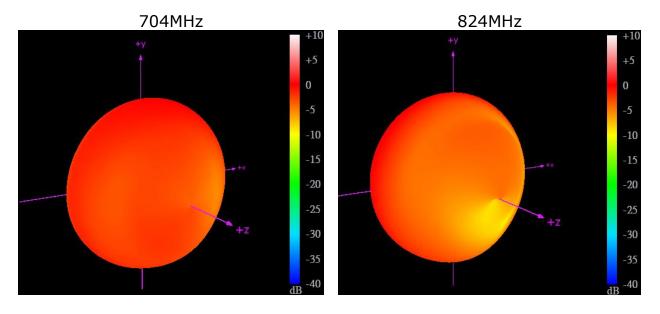









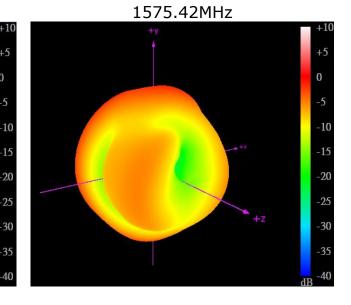








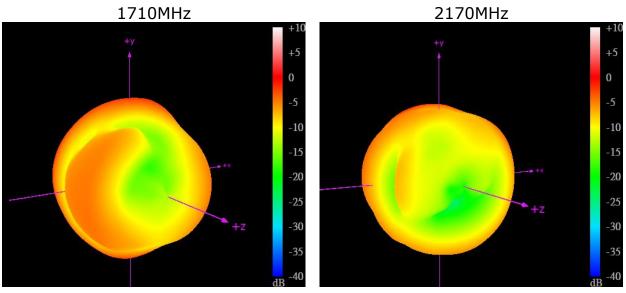



2690MHz






3D Radiation Pattern (Straight Position with 15x9cm Ground)

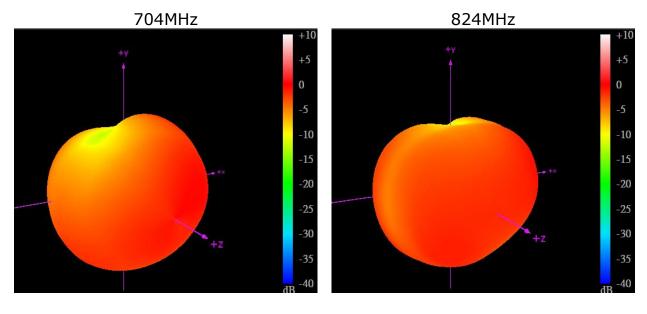






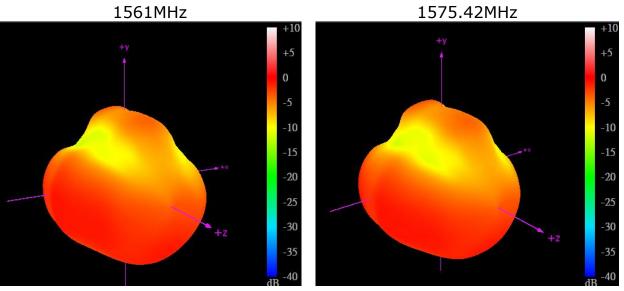



1602MHz














2690MHz






3D Radiation Pattern (Straight Position with 30x30cm Metal Ground Edge)

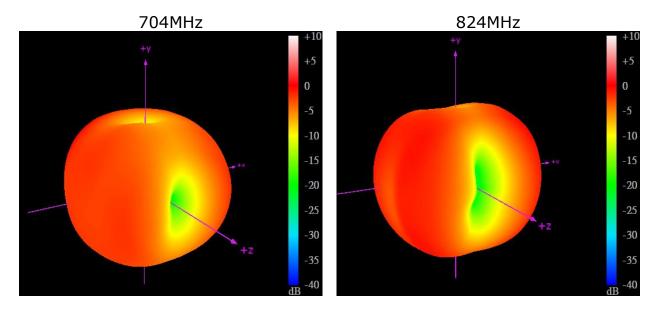








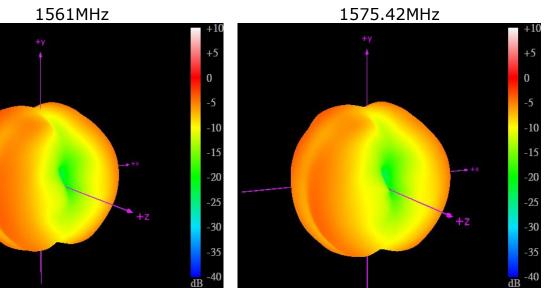

1602MHz






+10


-10

-20

-40 IR

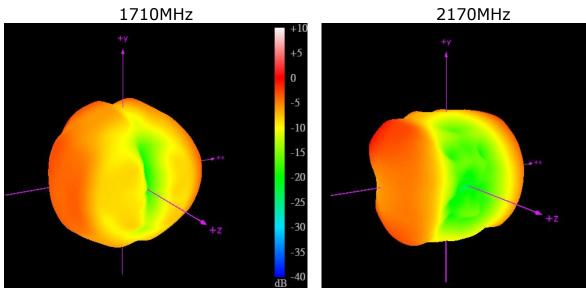



2690MHz






3D Radiation Pattern (Straight Position with 30x30cm Metal Ground Center)

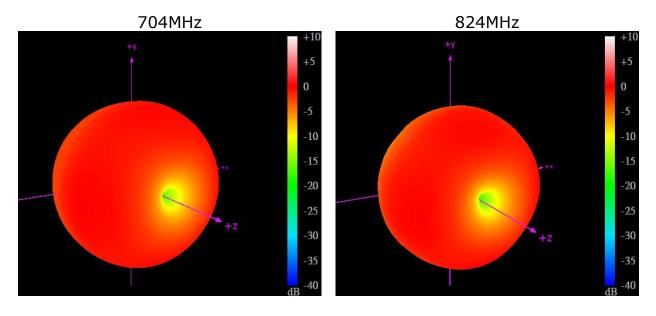






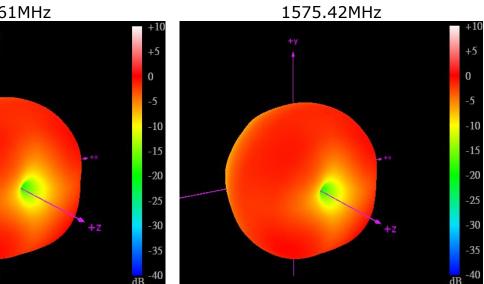



1602MHz








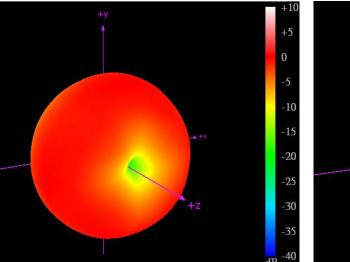





2690MHz






3D Radiation Pattern (Bent Position with in Free Space)

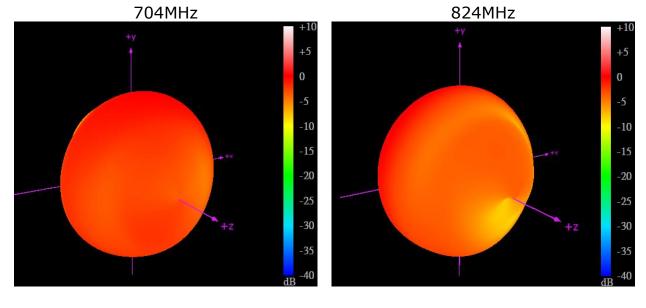








1575.42MHz











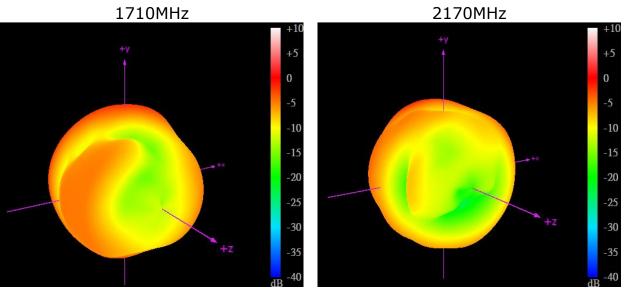







3D Radiation Pattern (Bent Position with 15x9cm Ground)

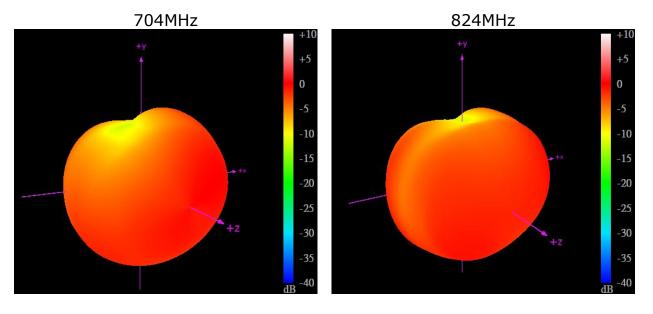

























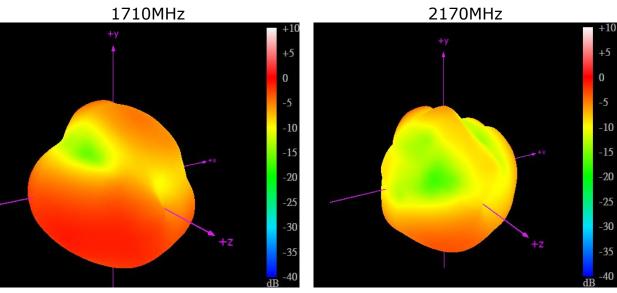







3D Radiation Pattern (Bent Position with 30x30cm Metal Ground Edge)















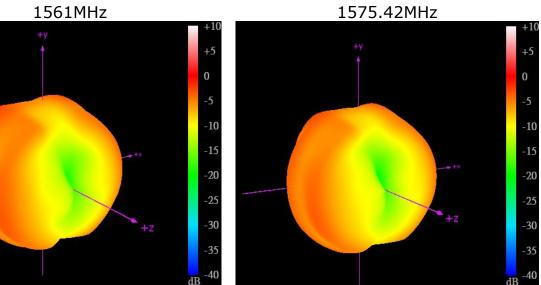
















40

3D Radiation Pattern (Bent Position with 30x30cm Metal Ground Center)




824MHz +10 +5 0 -5 -10 -15 -20 -25 -30 -35


960MHz



SPE-18-8-018/A/AW Page 65 of 70



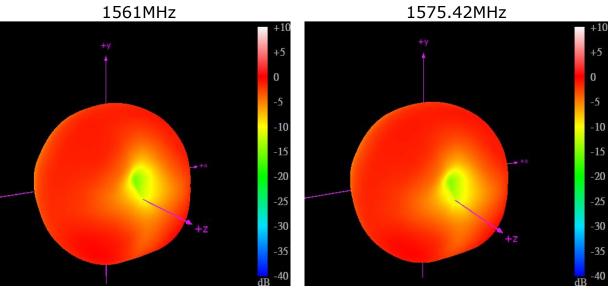






















3. Mechanical Drawing

(Unit:mm)

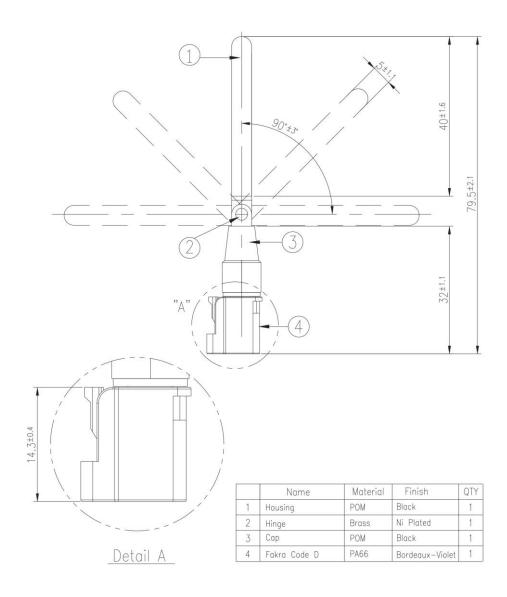





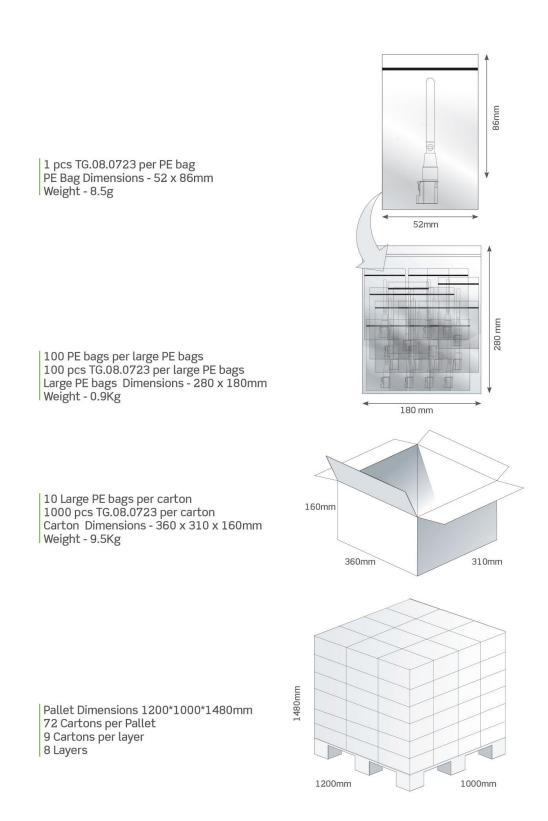



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Taoglas manufacturer:

Other Similar products are found below :

 GAN30084EU
 930-033-R
 GW17.07.0250E
 1513563-1
 EXE902SM
 APAMPG-117
 MAF94383
 W3908B0100
 W6102B0100
 YE572113

 30RSMM
 108-00014-50
 66089-2406
 SPDA17RP918
 A09-F8NF-M
 A09-F5NF-M
 RGFRA1903041A1T
 W3593B0100
 W3921B0100

 SIMNA-868
 SIMNA-915
 SIMNA-433
 W1044
 W1049B090
 A75-001
 WTL2449CQ1-FRSMM
 CPL9C
 EXB148BN
 0600-00060

 TRA9020S3PBN-001
 GD5W-28P-NF
 MA9-7N
 GD53-25
 GD5W-21P-NF
 C37
 MAF94051
 MA9-5N
 EXD420PL
 B1322NR
 QWFTB120

 MAF94271
 MAF94300
 GPSMB301
 FG4403
 AO-AGSM-OM54
 5200232
 MIKROE-2349
 WCM.01.0111
 MIKROE-2393
 MIKROE-2352

 MIKROE-2350
 MIKROE-2350
 MIKROE-2350
 MIKROE-2350
 MIKROE-2350
 MIKROE-2350