

# **SPECIFICATION PATENTED**

Part No. TG.30.8111W

Product Name : Apex White Straight TG.30

Ultra-Wideband 4G LTE Antenna

Feature : LTE / GSM / CDMA /DCS /PCS / WCDMA /

> UMTS / HSDPA / GPRS / EDGE /GPS /Wi-Fi 698~960MHz, 1575.42MHz, 1710~2700MHz Typical 70%+ Efficiency and 3dBi+ Peak Gain

Dipole Swivel Terminal Antenna

White Version

Straight SMA(M) Connector

**RoHS Compliant** 





### 1. Introduction

The Apex White Straight TG.30 Dipole LTE Antenna is primarily designed for use with 4G LTE modules and devices that require the highest possible efficiency and peak gain to deliver best in class throughput on all major cellular (4G/3G/2G) bands worldwide for access points, terminals and routers. The antenna is a ground plane independent antenna with a SMA (M) connector and swivel mechanism that allows the antenna part to be rotated around the connector. The Apex exhibits high efficiency across the ultra wide band and is backward compatible with 2G and 3G cellular applications such as GSM, LTE, UMTS, WiFi and even has GPS included for Assisted GPS and/or E911 applications. With very high efficiency on every cellular band globally it is an ideal solution for any device requiring high, reliable performance. It is also guaranteed to meet any type approval or carrier certification requirements from a RF standpoint. It is an omnidirectional antenna and the radiation patterns display this and are stable across all bands.

It has a quality robust housing for use with wireless terminals. The swivel mechanism allows the antenna part itself to be orientated in different directions and can help avoid touching off other antennas or objects close by as well as helping with isolation by orientating the antenna in different directions in MIMO systems or when other TG.30 antennas are present on the same device.

This patented antenna is also available in Black; hinged and right angled versions.

SPE-12-8-119/F/WY US Patent No.: 9559423



# 2. Specification

ELECTRICAL									
Frequency (MHz)	700~800	824~960	1575.42	1710 ~ 1880	1850 ~ 1990	1710 ~ 2170	2400~2700		
Peak Gain (dBi)									
Free Space	2.0	1.2	0.3	2.4	3.0	3.0	4.2		
On 30*30cm GP	3.0	1.5	2.9	3.7	3.6	3.7	6.5		
Average Gain									
Free Space	-0.7	-1.1	-1.7	-0.2	-0.5	-0.2	-0.7		
On 30*30cm GP	-0.3	-1.0	-1.2	-0.4	-0.6	-0.4	-0.4		
Efficiency									
Free Space	86%	78%	67%	82%	89%	55%	60%		
On 30*30cm GP	90%	68%	75%	82%	86%	70%	72%		
Impedance		50Ω							
Polarization		Linear							
Radiation Pattern		Omnidirectional							
Input Power		10W							
MECHANICAL									
Casing			UV Resistant, PC/ABS						
Connecto		SMA Male							
ENVIRONMENTAL									
Temperature Range			-40°C to 85°C						
Humidity			Non-condensing 65°C 95% RH						



	LI E I	LTE BANDS							
Band Number	LTE / LTE-Advanced ,	/ WCDMA / HSPA / HSPA+ / TD-SCDMA							
	Uplink	Downlink	Covered						
1	UL: 1920 to 1980	DL: 2110 to 2170	✓						
2	UL: 1850 to 1910	DL: 1930 to 1990	✓						
3	UL: 1710 to 1785	DL: 1805 to 1880	✓						
4	UL: 1710 to 1755	DL: 2110 to 2155	✓						
5	UL: 824 to 849	DL: 869 to 894	✓						
7	UL: 2500 to 2570	DL:2620 to 2690	✓						
8	UL: 880 to 915	DL: 925 to 960	✓						
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓						
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	×						
12	UL: 699 to 716	DL: 729 to 746	✓						
13	UL: 777 to 787	DL: 746 to 756	✓						
14	UL: 788 to 798	DL: 758 to 768	✓						
17	UL: 704 to 716	DL: 734 to 746 (LTE only)	✓						
18	UL: 815 to 830	DL: 860 to 875 (LET only)	✓						
19	UL: 830 to 845	DL: 875 to 890	✓						
20	UL: 832 to 862	DL: 791 to 821	✓						
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	×						
22	UL: 3410 to 3490	DL: 3510 to 3590	×						
23	UL:2000 to 2020	DL: 2180 to 2200 (LTE only)	✓						
24	UL:1625.5 to 1660.5	DL: 1525 to 1559 (LTE only)	✓						
25	UL: 1850 to 1915	DL: 1930 to 1995	✓						
26	UL: 814 to 849	DL: 859 to 894	✓						
27	UL: 807 to 824	DL: 852 to 869 (LTE only)	✓						
28	UL: 703 to 748	DL: 758 to 803 (LTE only)	✓						
29	UL: -	DL: 717 to 728 (LTE only)	✓						
30	UL: 2305 to 2315	DL: 2350 to 2360 (LTE only)	✓						
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5 (LTE only)	×						
32	UL: -	DL: 1452 - 1496	×						
35	1850 to	✓							
38	2570 to	✓							
39	1880 to	✓							
40	2300 t	✓							
41	2496 t	✓							
42	3400 to	×							
43	3600 to 3800 ×								


<sup>\*</sup>Covered bands represent an efficiency greater than 20%

US Patent No.: 9559423 SPE-12-8-119/F/WY Page 4 of 21




### 3. Antenna Characteristics

#### 3.1 Return Loss

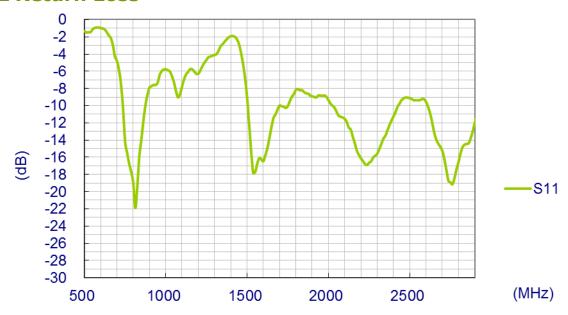


#### 3.2 Peak Gain

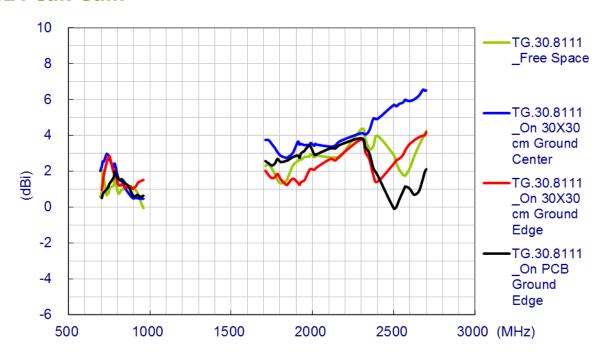




### 3.3 Average Gain

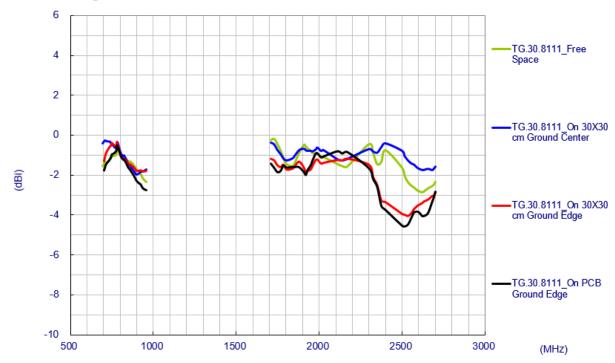

### 3.4 Efficiency

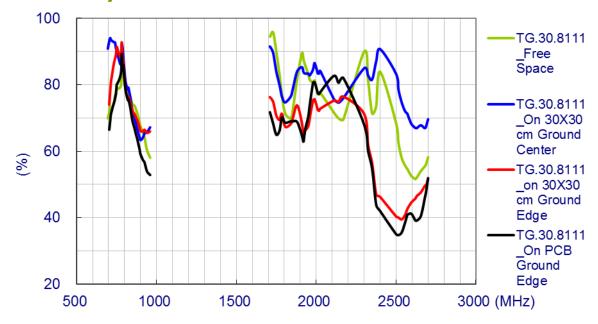


US Patent No.: 9559423



## 4. Antenna Radiation Patterns

### 4.1 Antenna setup (Free Space)

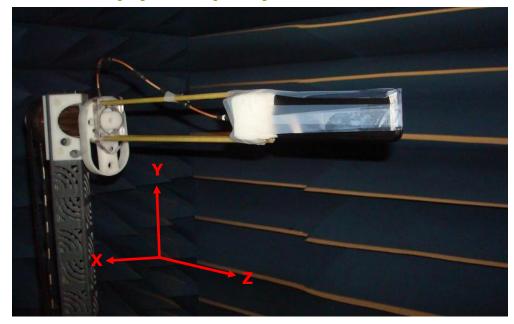



US Patent No.: 9559423 SPE-12-8-119/F/WY Page 7 of 21



### 4.2 Radiation Patterns (Free Space)


#### XY Plane

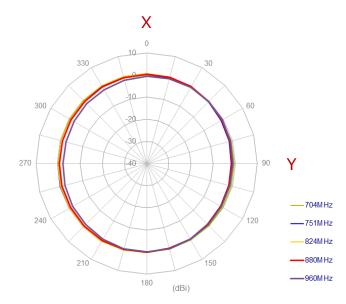


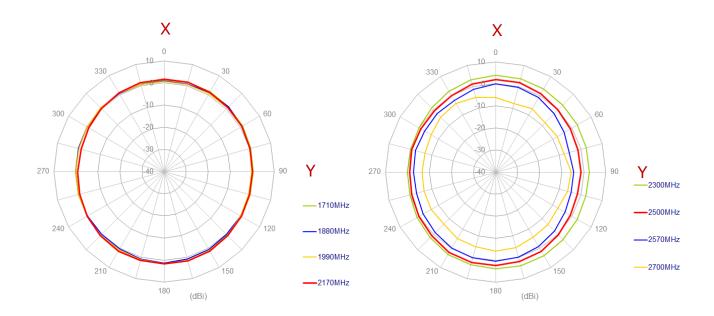



#### XZ Plane

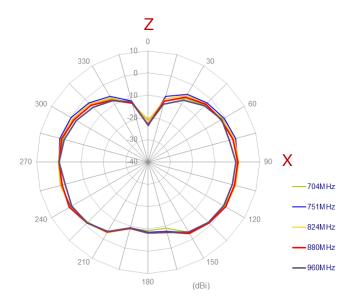


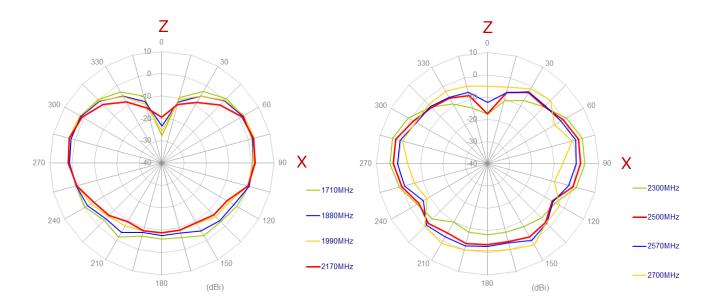

US Patent No.: 9559423 SPE-12-8-119/F/WY Page 9 of 21



## 4.3 Antenna setup (On 300\*300mm ground center)

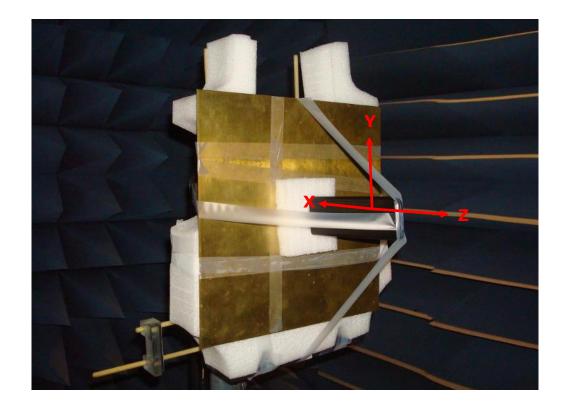



US Patent No.: 9559423 SPE-12-8-119/F/WY Page 10 of 21



## 4.4 Radiation Patterns (On 300\*300mm ground center)

#### **XY Plane**

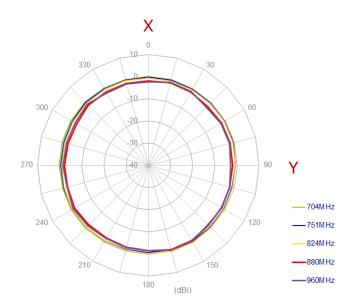


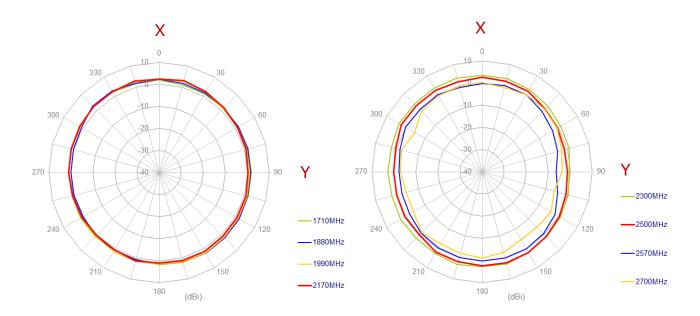


US Patent No.: 9559423



#### **XZ Plane**

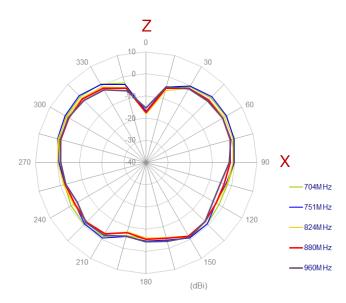

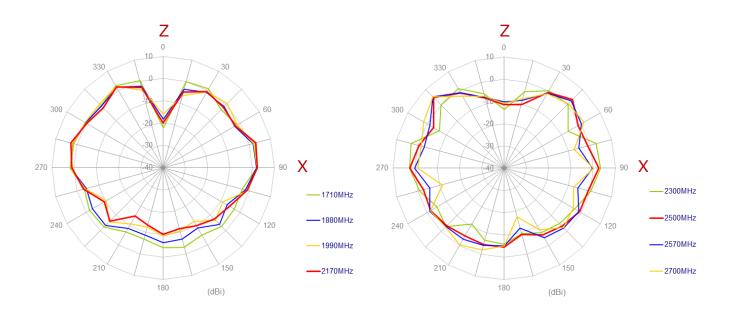

## 4.5 Antenna setup (On 300\*300mm ground edge)







US Patent No.: 9559423 SPE-12-8-119/F/WY Page 13 of 21



## 4.6 Radiation Patterns (On 300\*300mm ground edge)

#### **XY Plane**

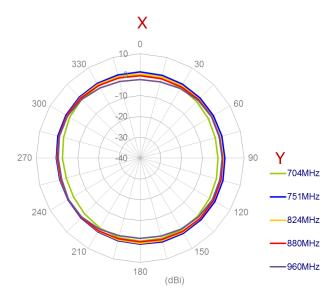


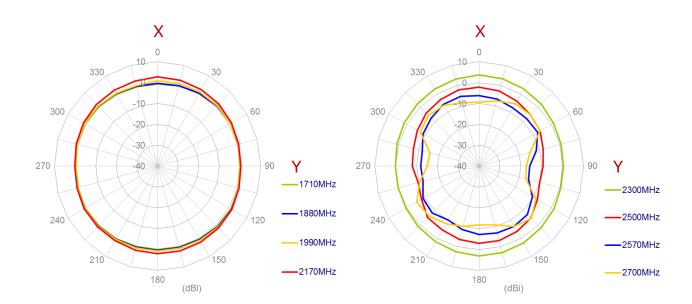


US Patent No.: 9559423



#### **XZ Plane**

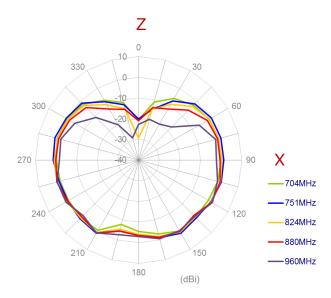


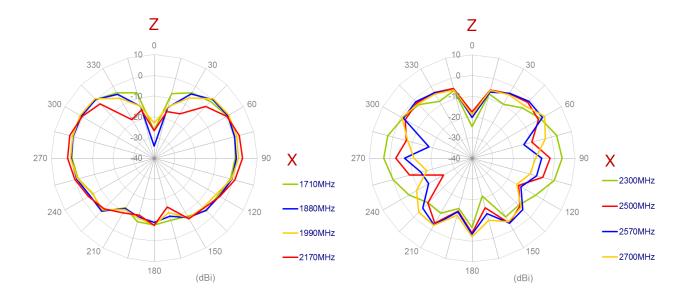

US Patent No.: 9559423



## 4.7 Antenna setup (On ground edge)

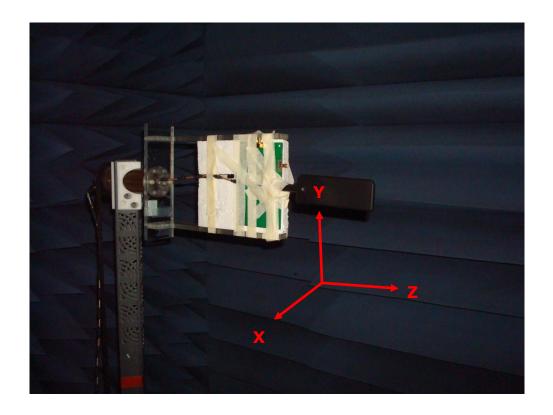



US Patent No.: 9559423 SPE-12-8-119/F/WY Page 16 of 21



## 4.8 Radiation Patterns (On ground edge)


#### **XY Plane**

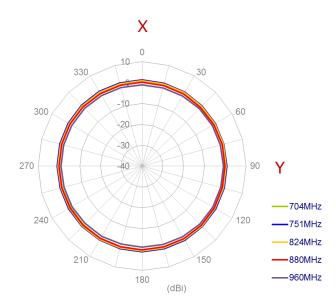


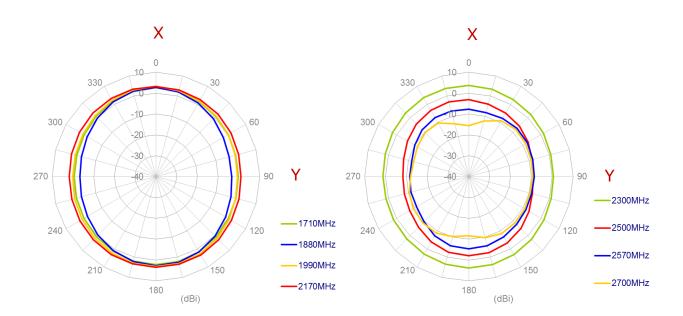



#### **XZ Plane**

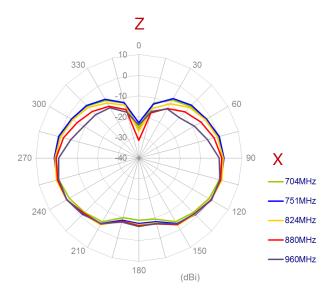


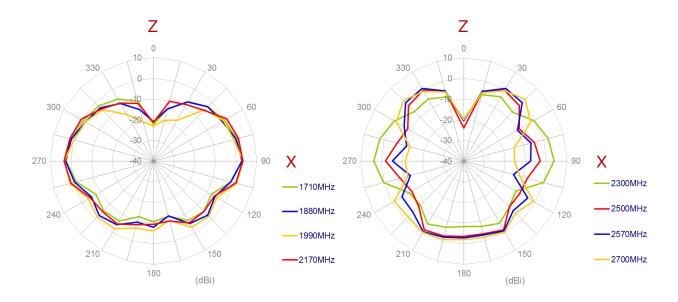

US Patent No.: 9559423 SPE-12-8-119/F/WY Page 18 of 21



# 5 Drawing (Unit: mm)

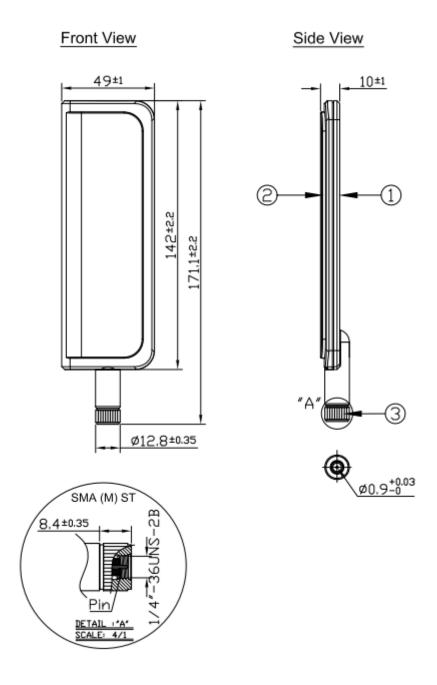

US Patent No.: 9559423 SPE-12-8-119/F/WY Page 19 of 21




# 6 Packaging (Unit: mm)

1pc TG.30.8111W per Small PE Bag Small PE Bag Dimensions - 230\*130mm Weight - 127g

50pcs TG.30.8111W per Large PE Bag Large PE Bag Dimensions - 395\*338mm Weight - 6.35Kg

200pcs TG.30.8111W per carton Carton Dimensions - 315\*380\*290mm Weight - 6.5Kg

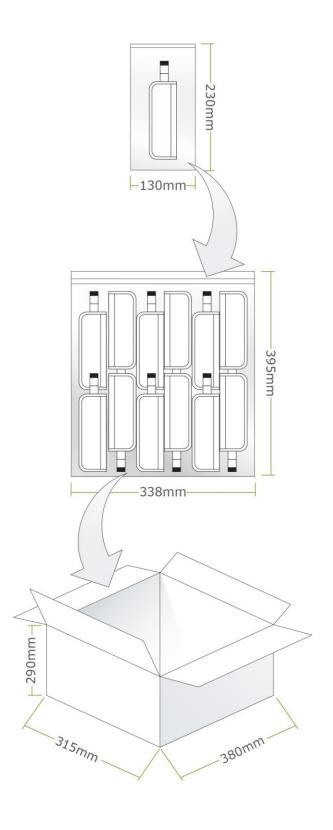

US Patent No.: 9559423 SPE-12-8-119/F/WY Page 20 of 21



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Taoglas manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352