

Common mode Filters for CAN(Contoller Area Network)

FEATURES

- Operating temperature range from -40°C to +125°C.
- Non-soldered internal construction provides excellent heat resistance – to ensure effective circuit board mounting.
- Robust lead frame termination – provides sound and flexible mechanical construction.
- Lead free soldering applicable
- AEC-Q200 compliant

APPLICATION


This SMD type product is effective in reducing noise associated with the internal communication networks used within automotive vehicles. (CAN-bus system)

PRODUCT IDENTIFICATION

ACT45C - 510 - 2P - TL - 000
 (1) (2) (3) (4) (5)




- (1) Series name
- (2) Inductance typ. Value
- (3) Numbers of lines
2P : 2 lines
- (4)Packing style
TL : Taping \varnothing 330mm reel 2,500pcs.
- (5)Control mark

EQUIVALENT CIRCUIT




No directionality

SHAPES AND DIMENSIONS



Unit : mm

RECOMMENDED PATTERN

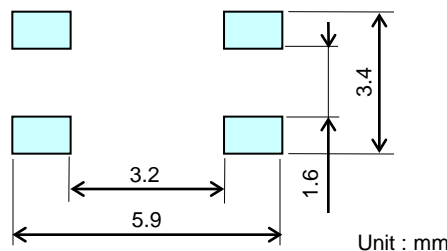





Unit : mm

ELECTRICAL CHARACTERISTICS

Part No.	Common-mode Z/(\u039b) at10MHz	Common-mode L (\u03bcH) typ. at100kHz	Stray L (\u03bcH) typ. at100kHz	DC resistance (\u039b)max.	Rated current DC(A)max.	Rated voltage DC(V)max.	Insulation Resistance (M\u039b)min.
ACT45C-110-2P	300min.(600typ.)	11+50/-30%	0.05	0.6	0.25	50	10
ACT45C-220-2P	500min. (1200typ.)	22+50/-30%	0.08	1.0	0.2	50	10
ACT45C-510-2P	1000min. (2800typ.)	51+50/-30%	0.15	1.0	0.2	50	10
ACT45C-101-2P	2000min.(5800typ.)	100+50/-30%	0.20	2.0	0.15	50	10

Common mode Filters for CAN(Contoller Area Network)

|Z| vs. FREQUENCY CHARACTERISTICS

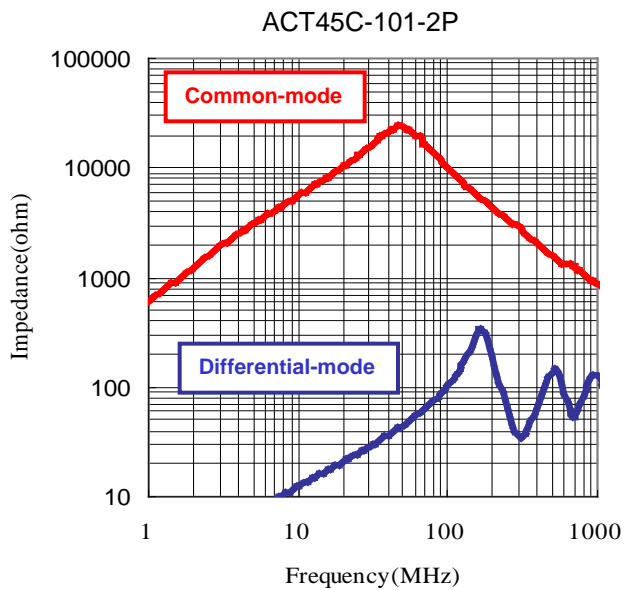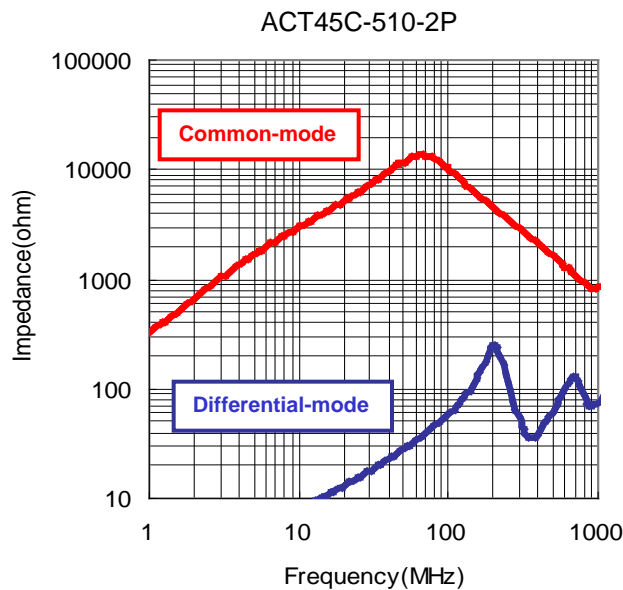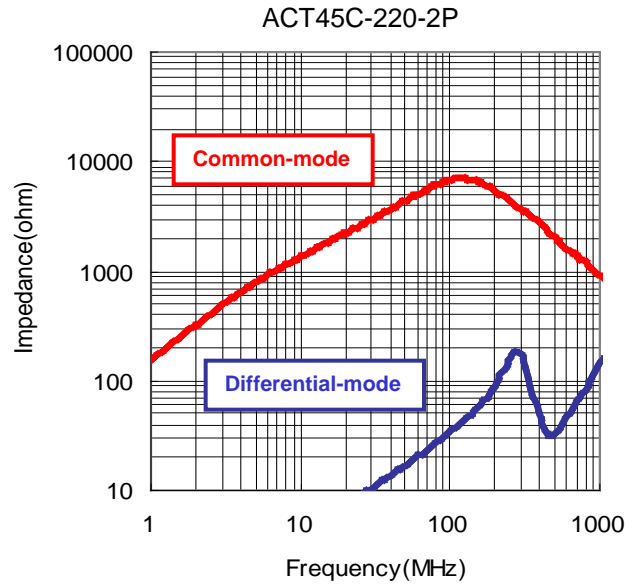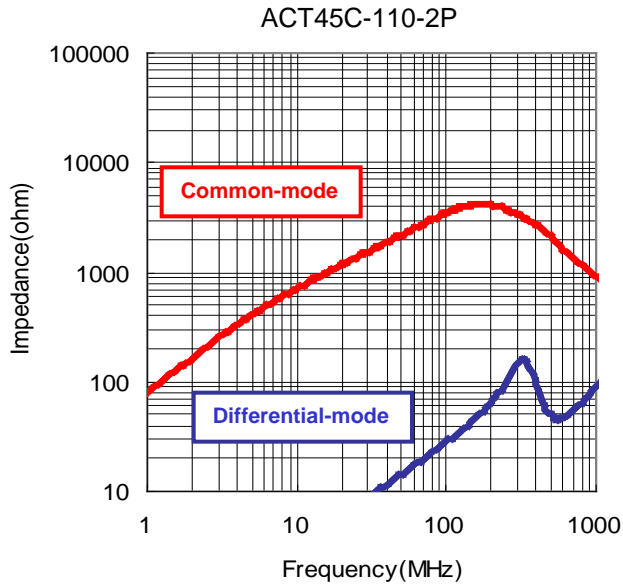

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [TDK](#) manufacturer:

Other Similar products are found below :

[RGCMF1210900H3T](#) [B82722A2102N001](#) [UAL21V07012500](#) [UAL24VR06500CH](#) [UALSC0220G0000](#) [UALSC058000000](#)
[UALSC0580J0000](#) [UALSC1520JH000](#) [UALSU10VR15019](#) [UALSU10VR20010](#) [UALSU16VD30030](#) [UALSU16VD40010](#)
[UALSU9H0305000](#) [UALSU9HF030600](#) [UALSU9HF060300](#) [UALSU9HR050340](#) [UALSU9VD070100](#) [UALSU9VR070170](#) [5701610000](#)
[CM7060M132R-10](#) [UALW21HS200290](#) [UALW21HS072450](#) [UALSU9VD070400](#) [UALSU9V0701000](#) [UALSU9HR030900](#)
[UALSU9HF050500](#) [UALSU9H0701000](#) [UALSU9H0208000](#) [UALSU9H0110000](#) [UALSCF25081300](#) [UALSC0305GS000](#)
[UALSC0120G0000](#) [UAL24VK06450CH](#) [UAL11VL1105000](#) [RN112-3.6-02-0M4](#) [RN114-1.2-02-10M](#) [RN122-0.6-02-47M](#) [RN122-3-02-4M5](#)
[RN142-1-02-33M](#) [RN214-2.5-02-3M3](#) [RN112-2-02-1M0](#) [RN143-6-02-1M8](#) [RN214-0.8-02-27M](#) [RN242-1.4-02-27M](#) [EXC-X4CH120X](#)
[DLW5BTM102TQ2L](#) [CMF16-153131](#) [CMF23H-273141](#) [744252510](#) [B82793C0253N201](#)