

# Disc Type Capacitors with Lead

High Voltage Ceramic Capacitors  
Commercial Grade

Safety Standard Approved  
CD series

Issue date: February 2013

- All specifications are subject to change without notice.
  - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

# Disc Type Capacitors with Lead

Conformity to RoHS Directive

High Voltage Ceramic Capacitors  
Commercial Grade

Safety Standard Approved  
CD Series

**REINFORCED INSULATION TYPE**  
**CLASS 2 HIGH DIELECTRIC**

## FEATURES

- Compliant with IEC and the safety standards of various countries.
- This ceramic capacitor meets reinforced insulation's Safety Standards.  
Since it is rated at a withstand voltage of AC.4000V, it can be used in single-unit configurations within European Class II devices.
- Flame-resistant reinforced outer insulation prevents fires, electrical shock, and other potential hazards.
- Compatible with halogen-free external resin coating.

**OPERATING TEMPERATURE RANGE: -25 to +125°C**

## TEMPERATURE CHARACTERISTICS AND TOLERANCE

Temperature characteristics	Test temperature range	Capacitance tolerance
SL (+350 to -1000ppm/°C)	+20 to +85°C	J (±5%)
B (±10%)	-25 to +85°C	K (±10%)
Z5U (+22, -56%)	+10 to +85°C	M (±20%)

## PRODUCT IDENTIFICATION

CD	90	ZU	2GA	222	M	Y	N	K	A
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)

- Type
- Shape
- Temperature characteristics
- Rated voltage
- Nominal capacitance
- Capacitance tolerance
- Class
- Lead type
- Safety standard
- Halogen-free compatible product

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

## CAPACITANCE AND DIMENSIONS

Part No.	Temperature characteristics	Capacitance (pF)	Capacitance tolerance	Dimensions (mm)			
				D max.	T max.	F	d
CD45SL2GA100JY□*KA	SL (+350 to -1000ppm/°C)	10	J (±5%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD45SL2GA150JY□*KA		15	J (±5%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD45SL2GA220JY□*KA		22	J (±5%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD45SL2GA330JY□*KA		33	J (±5%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD45SL2GA470JY□*KA		47	J (±5%)	8.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD45SL2GA680JY□*KA		68	J (±5%)	9.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD70-B2GA101KY□*KA	B (±10%)	100	K (±10%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD70-B2GA151KY□*KA		150	K (±10%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD70-B2GA221KY□*KA		220	K (±10%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD75-B2GA331KY□*KA		330	K (±10%)	7.5	7.0	10.0+2.0, -1.0	0.6±0.05
CD85-B2GA471KY□*KA		470	K (±10%)	9.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD65ZU2GA681MY□*KA		Z5U (+22, -56%)	680	M (±20%)	7.0	7.0	10.0+2.0, -1.0
CD70ZU2GA102MY□*KA	1,000		M (±20%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD80ZU2GA152MY□*KA	1,500		M (±20%)	8.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD90ZU2GA222MY□*KA	2,200		M (±20%)	9.5	7.0	10.0+2.0, -1.0	0.6±0.05
CD11ZU2GA332MY□*KA	3,300		M (±20%)	12.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD12ZU2GA472MY□*KA	4,700		M (±20%)	13.5	7.0	10.0+2.0, -1.0	0.6±0.05


\* □ : Lead shape symbol

## LIST OF STANDARD LEAD SHAPES

The lead type is indicated by the letter which is the 15th character of the product name.

Example) TDK Product Name: **CD90ZU2GA222MYNKA**

└ N: Lead type (Vertical kink, Short)

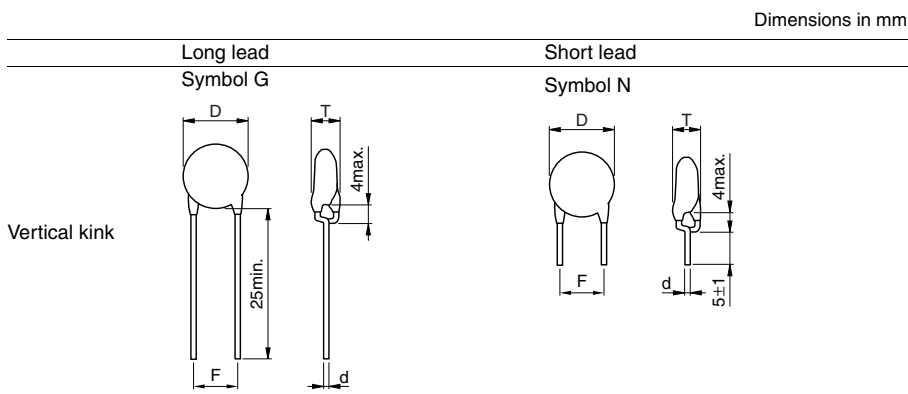

- We recommend using a vertical kink type.
- For bulk products, we recommend a short lead type with the symbol N.

## MARKINGS

Item	Markings	Specifications	Marking examples
1. Series	CD	CD series	<p>(Marking position is reference.)</p>
2. Nominal capacitance	222	2200pF	
3. Capacitance tolerance	M	±20%	
4. Rated voltage Eac	440~X1	X1: AC.440V	
5. TDK's logogram	400~Y1	Y1: AC.400V	
6. Date code	29	Production base code 2012.9*	

\* Year and month of production: last digit of year + month denoted by 1, 2, 3, 4, 5, 6, 7, 8, 9, O (October), N (November), or D (December).

\* The expression has become simplified due to a revision in the standards.

• For more information about products with other capacitance or other data, please contact us.

• All specifications are subject to change without notice.

**CERTIFIED STATUS OF VARIOUS COUNTRIES**

Safety standard	Standard No.	Temperature characteristics	Insulation sub-class	Rated voltage	Approval report No.	
					Taiwan	Xiamen
BSI	BS EN60384-14	SL, B, Z5U	X1, Y1	X1: AC.440V Y1: AC.400V	KM37103	KM37103
VDE	EN 60384-14				40017931	40017931
SEV	EN 60384-14				12.0223	12.0223
SEMKO	EN 60384-14				1125241	1125241
NEMKO	EN 60384-14				P12215264	P12215264
DEMKO	EN 60384-14				D-01094	D-01094
FIMKO	EN 60384-14				FI 27387	FI 27387
IMQ	EN 60384-14				V3691	V3691
SAA	AS3250				CS6268	CS6268
UL	UL 60384-14				E37861	E37861
CSA	CAN/CSA-E60384-14				1785504	1785504
CQC	GB/T14472-1998				CQC12001082617	CQC10001052863

- Certificate numbers shall be changed owing to the revisions of the related standards.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ceramic Disc Capacitors](#) category:*

*Click to view products by [TDK](#) manufacturer:*

Other Similar products are found below :

[5AU100JCECA](#) [5AU220JCGCA](#) [5AU560JCJCA](#) [DEF2CLH020CA3B](#) [DEF2CLH030CJ3B](#) [101GHR102K](#) [564RC0GBA302EJ470K](#)  
[NCD102K1KVY5FF](#) [NCD103M1KVZ5UF](#) [NCD331K1KVY5FF](#) [440LT68AP-R](#) [CK60AX471M](#) [AOL-1502-02](#) [NCD103M1KVZ5UJTBF](#)  
[DEF2CLH040CN3A](#) [DEF2CLH080DA3B](#) [0811-040-X7R0-102K](#) [8903D0](#) [90410-10](#) [CK61BX471K](#) [YV101103Z060HAND5P](#)  
[SL102101J060BAND5P](#) [YP202102K080D04A7H](#) [ZU501103M090B20C6P](#) [ZU102103M100X05B0P](#) [YP102271K050B20C6P](#)  
[YP102391K050BAND5P](#) [YP501101K040BAND5P](#) [ZU102103M100BAND5H](#) [YP102681K060B20C6P](#) [YP501121K040B20C6P](#)  
[SL102181J070HAND5P](#) [YP501471K040B20C6P](#) [SL102151J070HAND5P](#) [YP501102K050HAND5P](#) [ZU501102M050B20C6P](#)  
[YP501472K100B20C6P](#) [ZU102103M100B20C0P](#) [YV500223Z080HAND5P](#) [F121K25S3NN63J5R](#) [F121K25S3NP63K7R](#)  
[F121K25S3NR63K7R](#) [F122K47S3NP63K7R](#) [F681K43S3NR63K7R](#) [S470J25SL0N6TJ5R](#) [HVCC103Y6P152MEAX](#) [S103Z43Y5VN6TJ5R](#)  
[DCH102K34Y5PP6FJ5A0](#) [CC1H220KA1EDCH4B1100](#) [CC3A222MC1GEF45H31MF](#)