



Application & Main Feature

Commercial Grade (Low Dissipation)

Series

CK45-RR

Dimensions

- 8.5mm Max. D
- 6.0mm Max.
- 7.5mm +/-1.5mm
- 0.6mm +/-0.05mm
- 21.0mm Min.

Temperature Characteristic

R(+15,-30%)

Rated Voltage

3000Vdc

Withstanding Voltage

6000Vdc

Capacitance

330pF

Capacitance Tolerance

+/-10%

Dissipation Factor

0.2% Max.

Insulation Resistance


10000Mohm Min.


AEC-Q200


Not Applicable


Lead Length / Package Type

25mm for Bulk






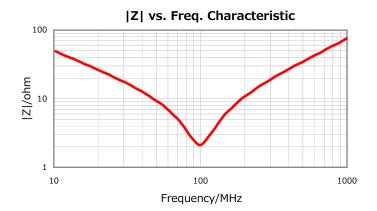

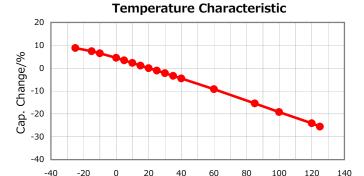

Temperature/degC





X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ceramic Disc Capacitors category:

Click to view products by TDK manufacturer:

Other Similar products are found below:

 009377XM
 5AS560JCFCA
 5AU100JCECA
 5AU470JCJCA
 DEF2CLH020CA3B
 HSE102MAQBF0KR
 432202101621
 432202282431

 DEF2CLH030CJ3B
 W1X223MCVCF0KR
 564RC0GBA302EJ470K
 5AS270JCDCA
 5AS330JCDCA
 5AU330JCGCA

 DE1E3KX222MJ4BN01F
 440LT68AP-R
 JN222MQ47FAAAAKPLP
 H8000090-245
 H8000090-225RY
 H8000090-309RY
 H8000090

 291RY
 F471K39S3NR63K7R
 DEF2CLH040CN3A
 DEF2CLH080DA3B
 564R3DF0T22
 CC2150KY5P1KVB5LS-LF

 CC2180KY5P1KVB5LS-LF
 CC2470KY5P1KVB5LS-LF
 CC2820KY5P1KVB5LS-LF
 0838-040-X7R0-220K
 JN102MQ35FAAAAKPLP

 0841-040-X5U0-103M
 CCH-100N/1000V
 CCH-6K8-5/1000V
 140-50N2-101J-TB-RC
 ECK-DGL102ME
 562R5GAD47RR

 S103K75Y5PN8BT0R
 615R100GAD10
 615R150GAD10
 NCD100K1KVSLF
 NCD682M1KVZ5UF
 CCK-100N
 CCK-100P
 CCK-22N

 CCK-2N2
 CCK-47N
 CCK-4N7
 CCK-4P7
 CCK-4P7