

# Multilayer Diplexers

For GSM850/PCS Tx & Rx

## DPX Series

**Type:**            **DPX205850DT-4032A1 (2.0×1.25×0.95mm)**  
                      **DPX201990DT-4114A2 (2.0×1.25×0.95mm)**  
                      **DPX201990DT-4014A2 (2.0×1.25×0.95mm)**

**Issue date:**     December 2010


- All specifications are subject to change without notice.
  - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

# Multilayer Chip Diplexers For GSM850/PCS Tx & Rx


Conformity to RoHS Directive

DPX Series DPX205850DT-4032A1

## SHAPES AND DIMENSIONS

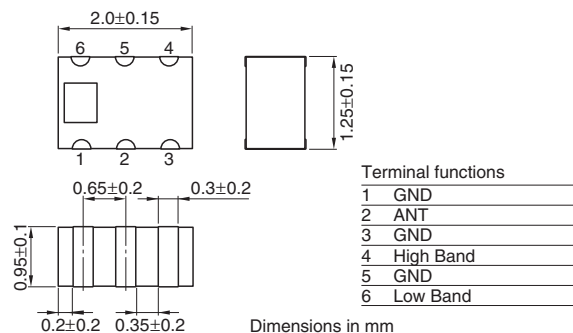

## RECOMMENDED PC BOARD PATTERNS

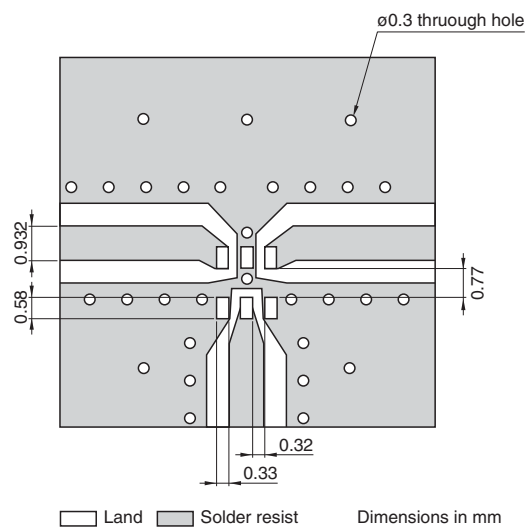

## ELECTRICAL CHARACTERISTICS

Item	Port	Frequency range		Minimum value	Typical value	Maximum value
Insertion loss	ANT Lo-band	800 to 2170MHz	(dB)	—	1.51	3.0
	ANT Hi-band	2400 to 5850MHz	(dB)	—	1.36	3.0
Attenuation	ANT Lo-band	2400 to 5850MHz	(dB)	8.0	12.7	—
	ANT Hi-band	800 to 2170MHz	(dB)	8.0	11.5	—
Temperature range	Operating		(°C)	-40	—	+85
	Storage		(°C)	-40	—	+85


• Ta: +25°C

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

### FREQUENCY CHARACTERISTICS


#### Lo-BAND PORT ATTENUATION S21

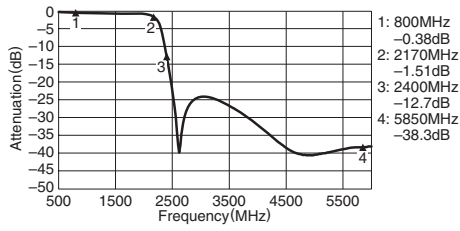


#### Hi-BAND PORT ATTENUATION S31

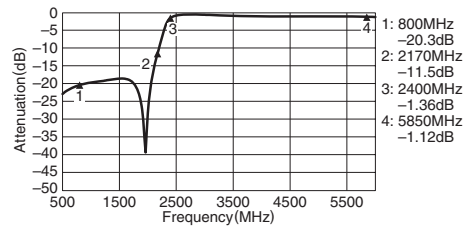


#### COMMON PORT RETURN LOSS S11

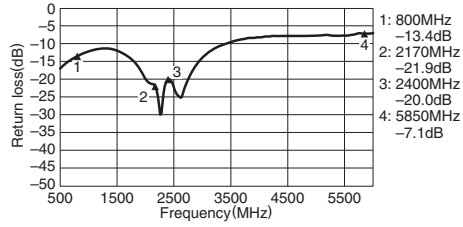


#### ISOLATION S23

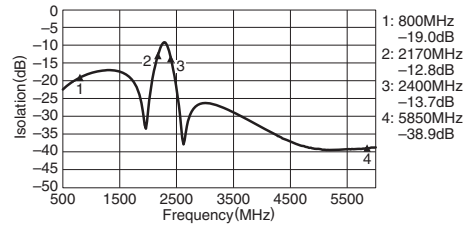

#### Lo-BAND PORT RETURN LOSS S22

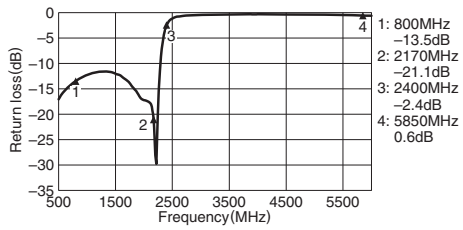

#### Hi-PORT RETURN LOSS S33

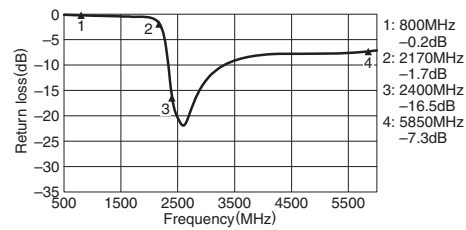


# Multilayer Chip Diplexers For GSM850/PCS Tx & Rx


Conformity to RoHS Directive

DPX Series DPX201990DT-4114A2

## SHAPES AND DIMENSIONS

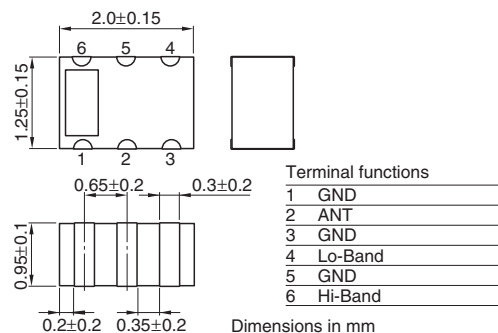

## RECOMMENDED PC BOARD PATTERNS

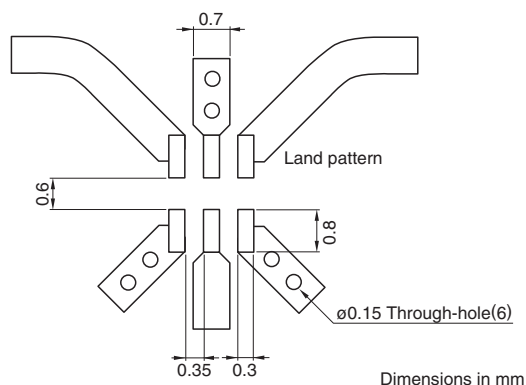

Line width be designed to match 50Ω characteristic impedance depending on PCB material and thickness.

## ELECTRICAL CHARACTERISTICS


Item	Port	Frequency range	Minimum value	Typical value	Maximum value
Insertion loss	Lo-band	[−40 to +85°C] 824 to 894MHz	(dB) —	—	0.5
	Hi-band	[−40 to +85°C] 1850 to 1990MHz	(dB) —	—	0.55
	Lo-band	[25°C] 824 to 894MHz	(dB) —	—	0.45
	Hi-band	[25°C] 1850 to 1990MHz	(dB) —	—	0.5
Return loss	ANT	824 to 894, 1850 to 1990MHz	(dB) 10.0	—	—
	Hi-band	824 to 894MHz	(dB) 19.0	—	—
Attenuation	Lo-band	1850 to 1990MHz	(dB) 20.0	—	—
	Lo-band	1648 to 1788MHz(AGSM 2fo)	(dB) 10.0	—	—
	Lo-band	2472 to 2682MHz(AGSM 3fo)	(dB) 28.0	—	—
Power capability			(W) —	—	3.0
Temperature range		Operating	(°C) −40	—	+85
		Storage	(°C) −40	—	+85

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

### FREQUENCY CHARACTERISTICS


#### Hi-BAND PORT S21

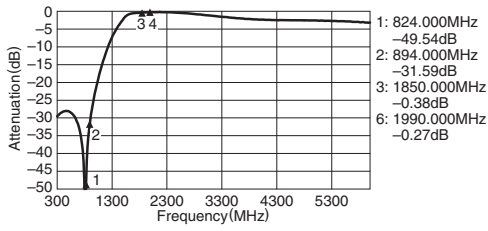


#### Lo-BAND PORT S31

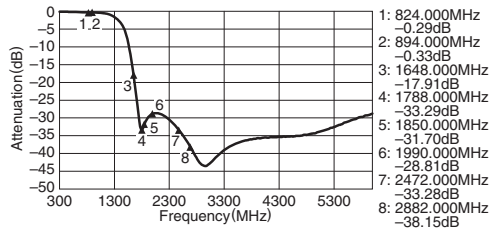


#### COMMON PORT RETURN LOSS S11

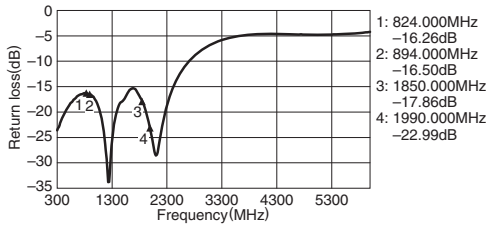


#### ISOLATION S23

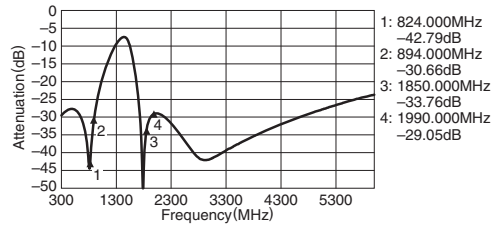


#### Hi-BAND PORT RETURN LOSS S22

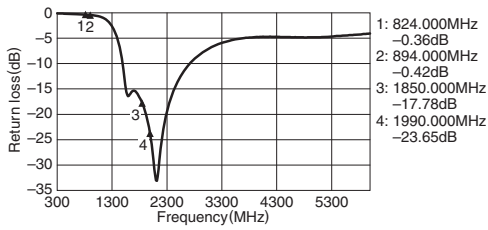


#### Lo-PORT RETURN LOSS S33

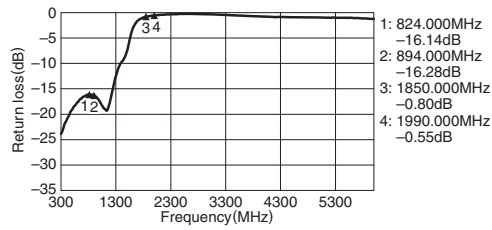


#### SMITH CHARTS




S11




S22



S33



S21




S31

# Multilayer Chip Diplexers For AGSM/PCS Tx/Rx


Conformity to RoHS Directive

DPX Series DPX201990DT-4014A2

## SHAPES AND DIMENSIONS

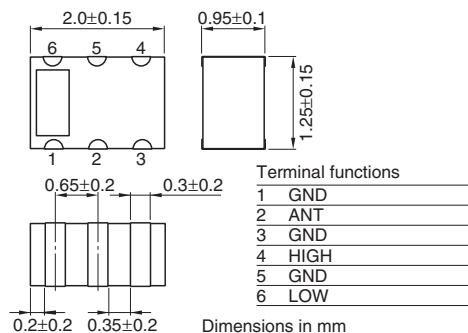

## RECOMMENDED PC BOARD PATTERNS

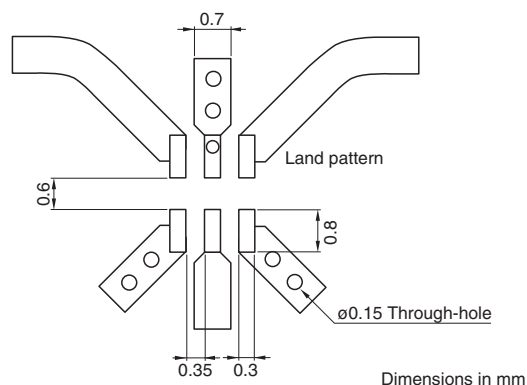

Line width be designed to match 50Ω characteristic impedance depending on PCB material and thickness.

## ELECTRICAL CHARACTERISTICS


Item	Port	Frequency range	Minimum value	Typical value	Maximum value
Insertion loss	Lo-band	[−40 to +85°C] 824 to 894MHz	(dB) —	—	0.5
	Hi-band	[−40 to +85°C] 1850 to 1990MHz	(dB) —	—	0.55
	Lo-band	[25°C] 824 to 894MHz	(dB) —	—	0.45
	Hi-band	[25°C] 1850 to 1990MHz	(dB) —	—	0.5
Return loss	ANT	824 to 894, 1850 to 1990MHz	(dB) 10.0	—	—
	Hi-band	824 to 894MHz	(dB) 19.0	—	—
Attenuation	Lo-band	1850 to 1990MHz	(dB) 20.0	—	—
	Lo-band	1648 to 1788MHz(AGSM 2fo)	(dB) 10.0	—	—
	Lo-band	2472 to 2682MHz(AGSM 3fo)	(dB) 28.0	—	—
Power capability			(W) —	—	3.0
Temperature range		Operating	(°C) −40	—	+85
		Storage	(°C) −40	—	+85

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

### FREQUENCY CHARACTERISTICS


#### Lo-BAND PORT S21

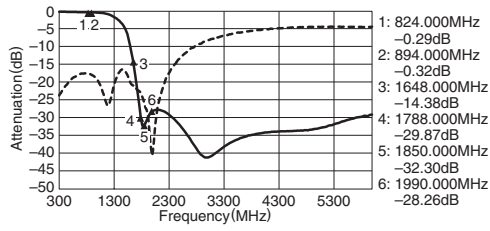


#### Hi-BAND PORT S31

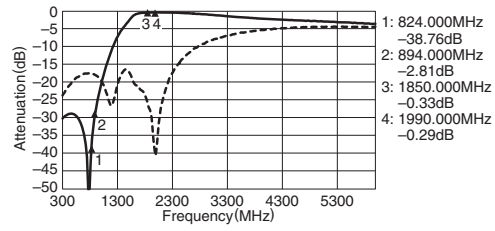


#### COMMON PORT RETURN LOSS S11

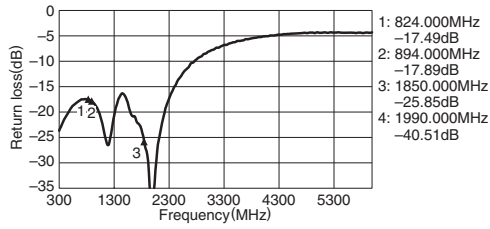


#### ISOLATION S23

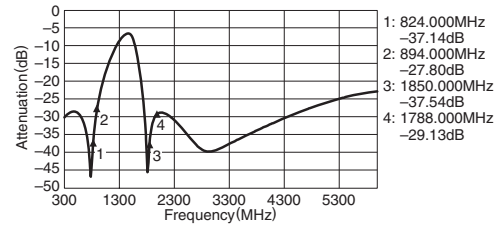


#### Lo-BAND PORT RETURN LOSS S22

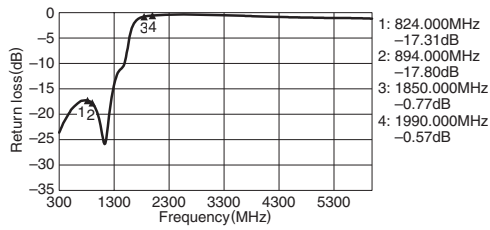


#### Hi-PORT RETURN LOSS S33

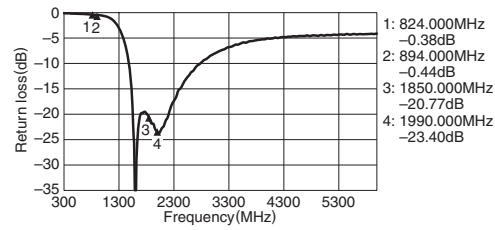


### SMITH CHARTS




S11




S22



S33



S21



S31

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning category](#):*

*Click to view products by [TDK manufacturer](#):*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)