

# SMD Inductors(Coils) For Power Line(Wound, Magnetic Shielded)

Conformity to RoHS Directive

## NLFC Series NLFC3225

### FEATURES

- The product has good heat durability that withstands lead-free compatible reflow soldering conditions.
- Lead-free material is used for the plating on the terminal.
- The NLFC series features magnetic shielding and is recommended for power supply line applications.
- It is a product conforming to RoHS directive.

### APPLICATIONS


- Audio-visual equipment including TVs, VCRs and digital cameras.
- Electronic equipment used in communication infrastructures including xDSL and mobile base stations.
- Other electronic equipment including HDDs and ODDs.

### SPECIFICATIONS


Operating temperature range	-40 to +105°C [Including self-temperature rise]
Storage temperature range	-40 to +105°C

### RECOMMENDED SOLDERING CONDITIONS

#### REFLOW SOLDERING

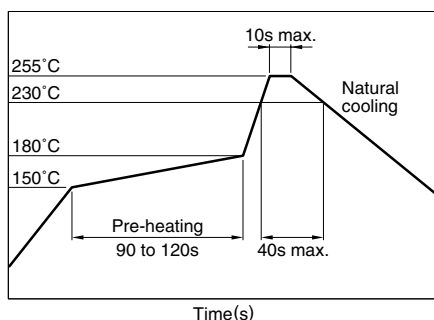

#### FLOW SOLDERING

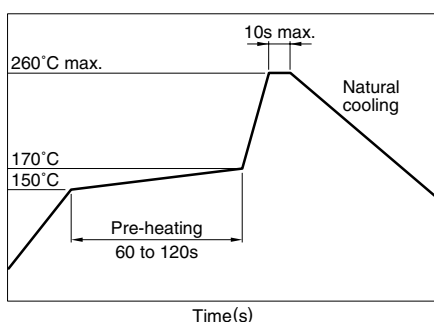

### IRON SOLDERING

Tip temperature	300 to 350°C
Heating time	3 seconds/soldering
Soldering rod specifications	Output: 30W Tip diameter: 1mm

- Based on the above conditions, use a maximum product temperature of 260°C and a maximum accumulated heating time of 10 seconds as a guideline.
- Please contact us for details.

### PRODUCT IDENTIFICATION

NLFC	322522	T	2R2	M	-PF
(1)	(2)	(3)	(4)	(5)	(6)

(1) Series name

(2) Dimensions

322522	3.2×2.5×2.2mm (L×W×T)
--------	-----------------------

(3) Packaging style

T	Taping (reel)
---	---------------

(4) Inductance value

1R0	1μH
100	10μH
101	100μH
102	1000μH

(5) Inductance tolerance

K	±10%
M	±20%

(6) Lead-free compatible product

PF	Lead-free compatible product
----	------------------------------


### PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	2000 pieces/reel

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

**SHAPES AND DIMENSIONS/RECOMMENDED PC BOARD PATTERN**

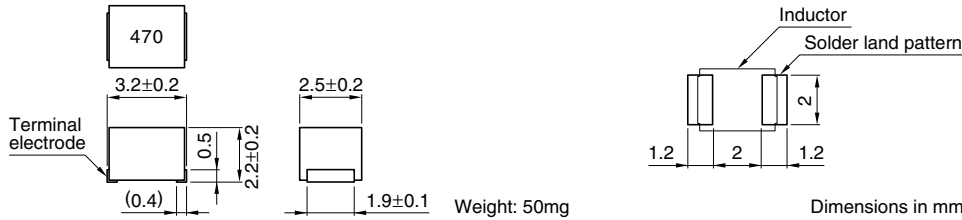

Weight: 50mg

Dimensions in mm

**ELECTRICAL CHARACTERISTICS**


Inductance (μH)	Inductance tolerance	Q ref.	Test frequency L, Q (MHz)	Self-resonant frequency (MHz)min.	DC resistance (Ω)±30%	Rated current* (mA)max.	Part No.
1	±20%	5	7.96	100	0.06	500	NLFC322522T-1R0M-PF
1.5	±20%	5	7.96	80	0.08	400	NLFC322522T-1R5M-PF
2.2	±20%	5	7.96	68	0.09	340	NLFC322522T-2R2M-PF
3.3	±20%	5	7.96	54	0.11	270	NLFC322522T-3R3M-PF
4.7	±20%	5	7.96	46	0.13	240	NLFC322522T-4R7M-PF
6.8	±20%	5	7.96	38	0.17	195	NLFC322522T-6R8M-PF
10	±10%	10	2.52	30	0.26	165	NLFC322522T-100K-PF
15	±10%	10	2.52	26	0.32	145	NLFC322522T-150K-PF
22	±10%	10	2.52	21	0.5	115	NLFC322522T-220K-PF
33	±10%	10	2.52	17	0.75	95	NLFC322522T-330K-PF
47	±10%	10	2.52	14	0.95	85	NLFC322522T-470K-PF
68	±10%	10	2.52	12	1.5	70	NLFC322522T-680K-PF
100	±10%	10	0.796	10	2.5	55	NLFC322522T-101K-PF
150	±10%	10	0.796	8	3.2	45	NLFC322522T-151K-PF
220	±10%	10	0.796	7	5.4	35	NLFC322522T-221K-PF
330	±10%	10	0.796	5	7	30	NLFC322522T-331K-PF
470	±10%	10	0.796	4	16	25	NLFC322522T-471K-PF
680	±10%	10	0.796	3	20	20	NLFC322522T-681K-PF
1000	±10%	10	0.252	2.4	24	15	NLFC322522T-102K-PF

\* Rated current: Value obtained when current flows and the temperature has risen to 20°C or when DC current flows and the initial value of inductance has fallen by 10%, whichever is smaller.


- Test equipment L, Q: YHP4194A IMPEDANCE ANALYZER+YHP16085A+YHP16093B+TF-1, or equivalent  
 SRF: HP8753C NETWORK ANALYZER (Z<sub>in</sub>=Z<sub>out</sub>=50Ω), or equivalent  
 Rdc: MATSUSHITA VP-2941A DIGITAL MILLIOHM METER, or equivalent

**TYPICAL ELECTRICAL CHARACTERISTICS**

**INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS**

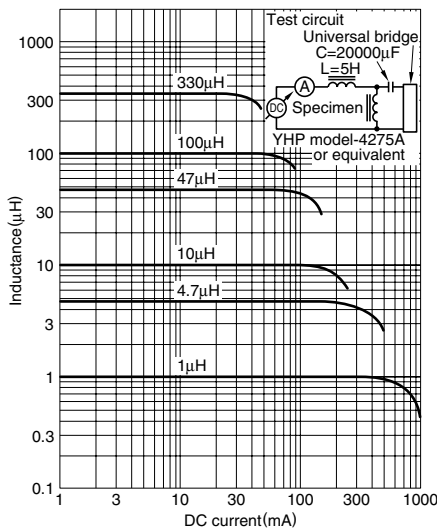

**IMPEDANCE vs. FREQUENCY CHARACTERISTICS**

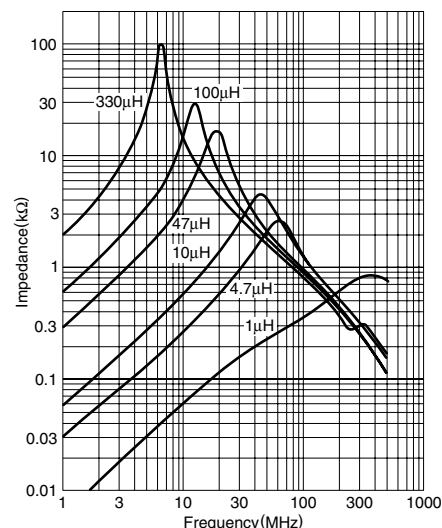

• All specifications are subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [TDK](#) manufacturer:*

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)