

Inductors for High-frequency Circuits

Wound/STD

Conformity to RoHS Directive

NLHV Series NLHV25

FEATURES

- High Q-factor is provided in frequency band more than 30MHz in comparison with existing NLV25 series.
- Land pattern is compatible with an existing series product.
- Lead-free material is used for the plating on the terminal

APPLICATIONS


Power supply lines, audio visual systems, IT equipment

SPECIFICATIONS


Operating temperature range	-40 to +105°C [Including self-temperature rise]
Storage temperature range	-40 to +105°C

RECOMMENDED SOLDERING CONDITIONS

REFLOW SOLDERING

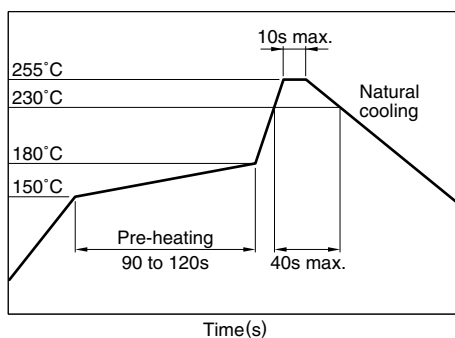

FLOW SOLDERING

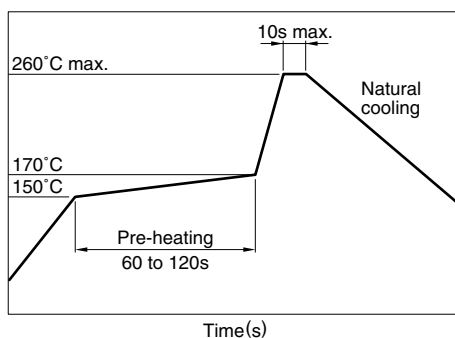

IRON SOLDERING

Tip temperature	300 to 350°C
Heating time	3 seconds/soldering
Soldering rod specifications	Output: 30W Tip diameter: 1mm

- Based on the above conditions, use a maximum product temperature of 260°C and a maximum accumulated heating time of 10 seconds as a guideline.
- Please contact us for details.

PRODUCT IDENTIFICATION

NLHV	25	T	R12	J	PF
(1)	(2)	(3)	(4)	(5)	(6)

(1) Series name

(2) Dimensions

25	2.5×2.0×1.8mm(L×W×T)
----	----------------------

(3) Packaging style

T	Taping (reel)
---	---------------

(4) Inductance

R12	0.12μH
-----	--------

(5) Inductance tolerance

J	±5%
---	-----


(6) Lead-free compatible product

PF	Conformity to RoHS directive, exemption regulations apply
EF	Conformity to RoHS directive

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

SHAPES AND DIMENSIONS/RECOMMENDED PC BOARD PATTERN

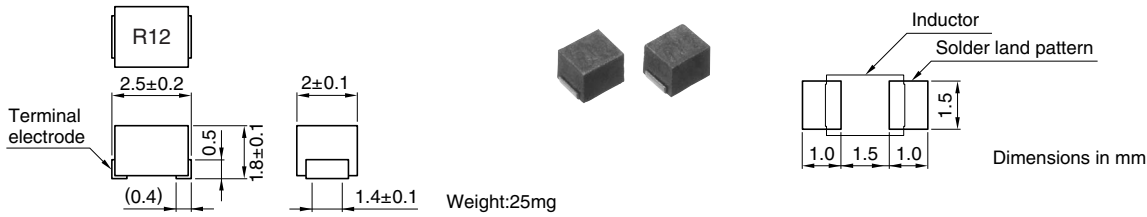


ELECTRICAL CHARACTERISTICS

Inductance (μH)	Inductance tolerance	Q min.	Test frequency L,Q (MHz)	Self-resonant frequency (MHz)min.	DC resistance (Ω)max.	Rated current (mA)max.	Part No.
0.12	±5%	30	25.2	700	0.38	550	NLHV25T-R12J-□*
0.15	±5%	30	25.2	550	0.42	500	NLHV25T-R15J-□
0.18	±5%	35	25.2	500	0.45	475	NLHV25T-R18J-□
0.22	±5%	35	25.2	450	0.5	450	NLHV25T-R22J-□
0.27	±5%	35	25.2	425	0.58	425	NLHV25T-R27J-□
0.33	±5%	40	25.2	400	0.68	400	NLHV25T-R33J-□
0.39	±5%	40	25.2	375	0.73	375	NLHV25T-R39J-□
0.47	±5%	40	25.2	350	0.83	350	NLHV25T-R47J-□
0.56	±5%	40	25.2	325	0.93	325	NLHV25T-R56J-□
0.68	±5%	40	25.2	180	0.98	300	NLHV25T-R68J-□
0.82	±5%	40	25.2	120	1.05	280	NLHV25T-R82J-□


* □: Please specify lead-free compatible product, PF (Conformity to RoHS directive, exemption regulations apply) or EF (Conformity to RoHS directive)

TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. FREQUENCY CHARACTERISTICS

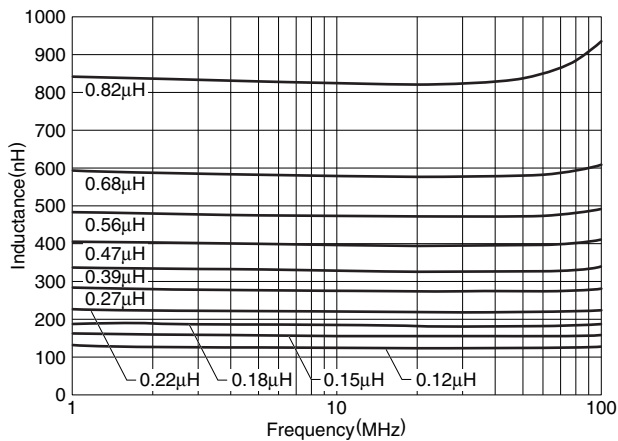

Q vs. FREQUENCY CHARACTERISTICS

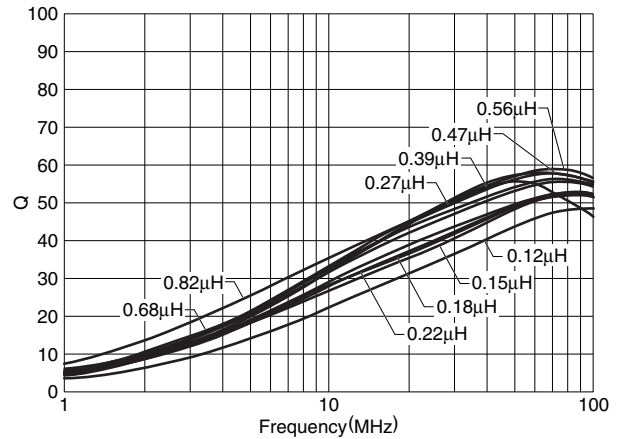

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [TDK](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#)
[MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#)
[PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#)
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)