

Inductors

For Power Line

SMD

VLF Series VLF3012A Type


FEATURES

- Miniature size
Mount area: 2.6×2.8mm
Low profile: 1.2mm max. height
- Generic use for portable DC to DC converter line
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.


APPLICATIONS

DVCs, DSCs, PDAs, LCD displays, Cellular phones, HDDs, etc.

SHAPES AND DIMENSIONS

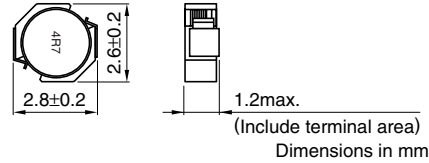

RECOMMENDED PC BOARD PATTERN



ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μH)	Inductance tolerance(%)	Test frequency (kHz)	DC resistance(Ω)		Rated current(A)*	
				max.	typ.	Based on inductance change max.	Based on temperature rise typ.
VLF3012AT-1R5N1R2	1.5	±30	100	0.068	0.059	1.2	1.6
VLF3012AT-2R2M1R0	2.2	±20	100	0.1	0.088	1.0	1.3
VLF3012AT-3R3MR87	3.3	±20	100	0.13	0.11	0.87	1.2
VLF3012AT-4R7MR74	4.7	±20	100	0.19	0.16	0.74	0.98
VLF3012AT-6R8MR59	6.8	±20	100	0.27	0.23	0.59	0.83
VLF3012AT-100MR49	10	±20	100	0.41	0.36	0.49	0.67
VLF3012AT-150MR41	15	±20	100	0.62	0.54	0.41	0.54
VLF3012AT-220MR33	22	±20	100	0.76	0.66	0.33	0.49
VLF3012AT-330MR27	33	±20	100	1.3	1.1	0.27	0.38
VLF3012AT-470MR22	47	±20	100	2.2	1.9	0.22	0.29


* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

- Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLF3012AT-1R5N1R2

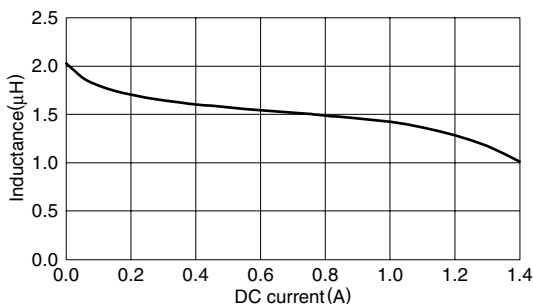

VLF3012AT-2R2M1R0

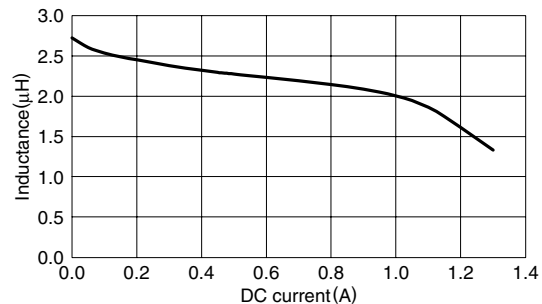

Inductors


For Power Line SMD

VLF Series VLF3012A Type


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS


VLF3012AT-3R3MR87

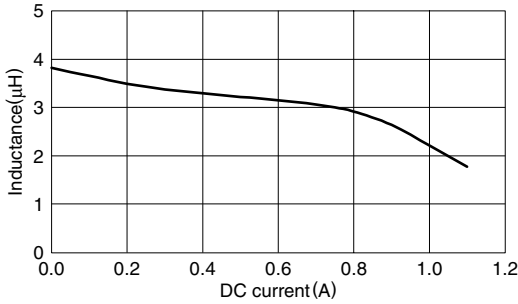


VLF3012AT-4R7MR74

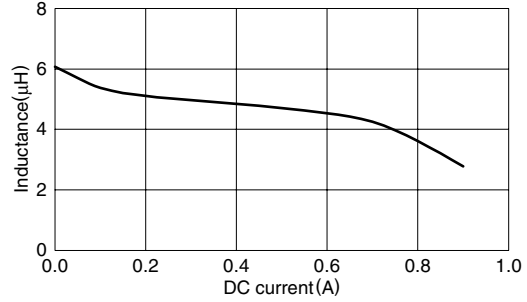


VLF3012AT-6R8MR59

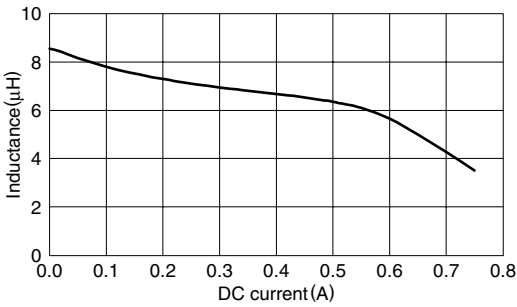


VLF3012AT-100MR49

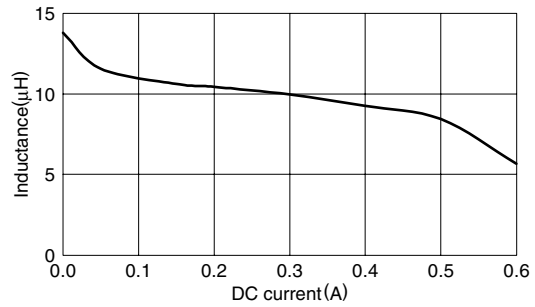


VLF3012AT-150MR41

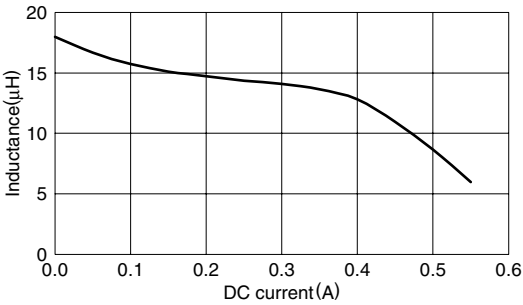


VLF3012AT-220MR33

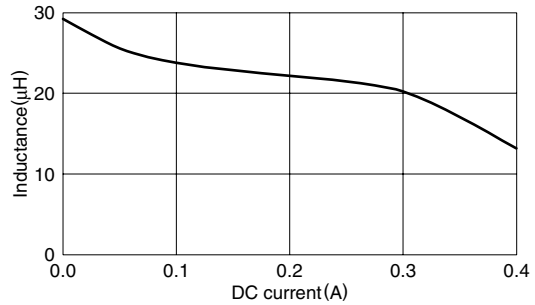


VLF3012AT-330MR27

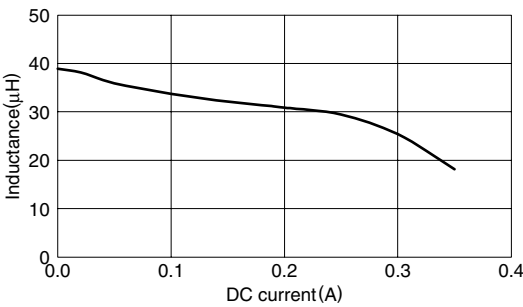

VLF3012AT-470MR22

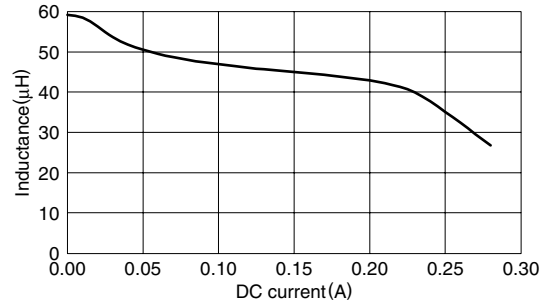

TEST CIRCUIT



1: LCR meter 4285A=100kHz
2: DC constant current

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [TDK](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#)
[MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#)
[PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#)
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)