

# SMD Inductors(Coils) For Power Line(Wound, Magnetic Shielded)

Conformity to RoHS Directive

## VLS Series VLS252012



### FEATURES

- Miniature size  
Mount area: 2.5×2mm  
Height: 1.2mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

### APPLICATIONS

DVCs, DSCs, PDAs, LCD displays, cellular phones, HDDs, etc.


### SHAPES AND DIMENSIONS



Dimensions in mm



### RECOMMENDED PC BOARD PATTERN



Dimensions in mm

### ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μH)	Inductance tolerance (%)	Test frequency (MHz)	DC resistance (Ω)		Rated current(A)*		
				max.	typ.	Based on inductance change		Based on temperature rise typ.
VLS252012T-R47N2R1	0.47	±30	1	0.056	0.047	3.3	3.7	2.2
VLS252012T-1R0N1R7	1	±30	1	0.088	0.073	2.4	2.7	1.8
VLS252012T-1R5N1R4	1.5	±30	1	0.126	0.105	2	2.2	1.5
VLS252012T-2R2M1R3	2.2	±20	1	0.155	0.129	1.8	2	1.3
VLS252012T-3R3MR99	3.3	±20	1	0.272	0.227	1.4	1.6	1
VLS252012T-4R7MR81	4.7	±20	1	0.406	0.338	1.2	1.3	0.8
VLS252012T-6R8MR66	6.8	±20	1	0.612	0.51	0.99	1.1	0.66
VLS252012T-100MR59	10	±20	1	0.756	0.63	0.81	0.9	0.59


\* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

- Operating temperature range: -40 to +105°C (Including self-temperature rise)


### TYPICAL ELECTRICAL CHARACTERISTICS

#### INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

##### VLS252012T-R47N2R1

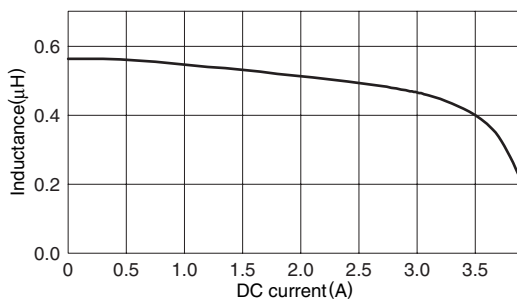


##### VLS252012T-1R0N1R7

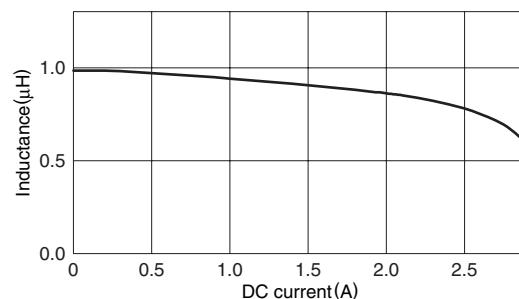


- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.


**TYPICAL ELECTRICAL CHARACTERISTICS**  
**INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS**  
**VLS252012T-1R5N1R4**

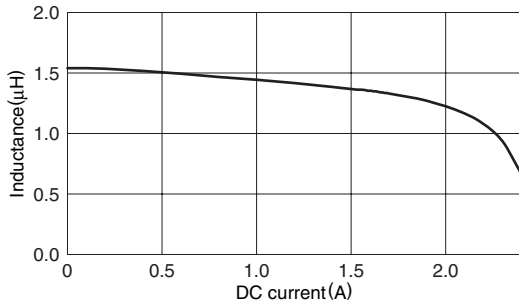


**VLS252012T-2R2M1R3**

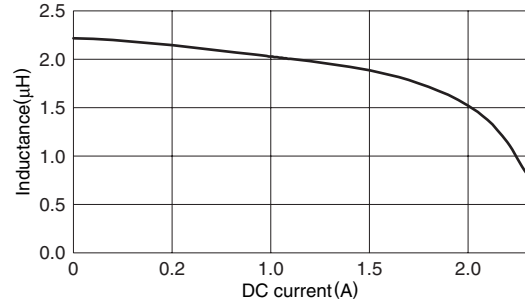


**VLS252012T-3R3MR99**

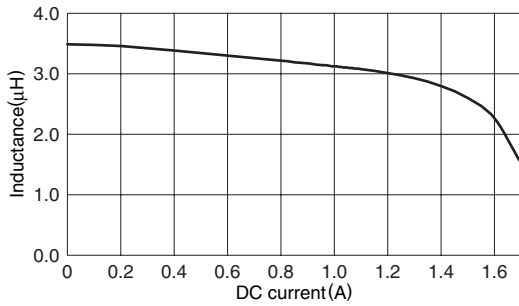


**VLS252012T-4R7MR81**

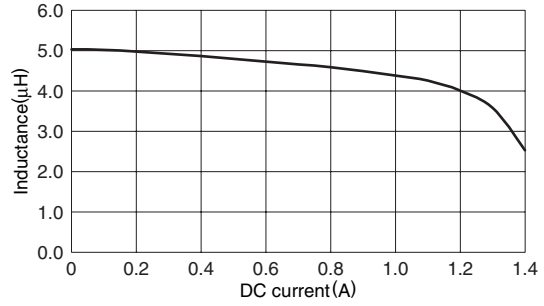


**VLS252012T-6R8MR66**

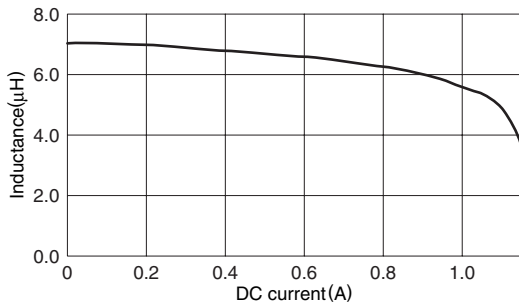

**VLS252012T-100MR59**

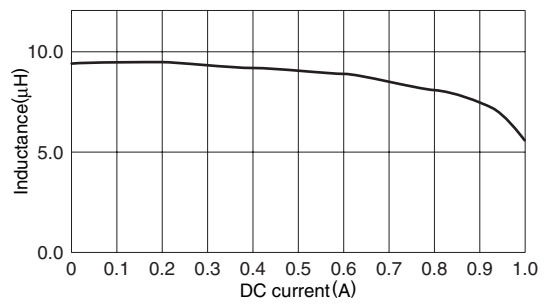

**TEST CIRCUIT**



- 1: LCR meter 4285A f=1MHz
- 2: DC constant current

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [TDK](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#)  
[MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#)  
[PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#)  
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)  
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)  
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)