

SMD Inductors(Coils) For Power Line(Wound, Magnetic Shielded)

Conformity to RoHS Directive

VLS Series VLS3015


FEATURES

- Miniature size
Mount area: 3×3mm
Height: 1.5mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.


APPLICATIONS

DVCs, DSCs, PDAs, LCD displays, cellular phones, HDDs, etc.

SHAPES AND DIMENSIONS

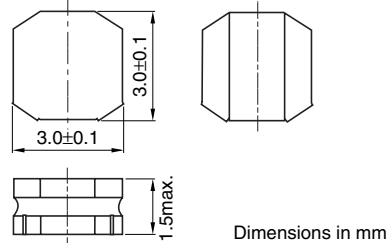

RECOMMENDED PC BOARD PATTERN

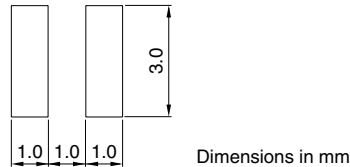

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μH)	Inductance tolerance (%)	Test frequency (MHz)	DC resistance (Ω)		Rated current(A)* Based on inductance change		Based on temperature rise typ.
				max.	typ.	max.	typ.	
VLS3015T-1R0N2R0	1	±30	1	0.058	0.048	2	2.2	2.2
VLS3015T-1R5N1R6	1.5	±30	1	0.074	0.062	1.6	1.8	2
VLS3015T-2R2M1R4	2.2	±20	1	0.084	0.07	1.4	1.5	1.8
VLS3015T-3R3M1R2	3.3	±20	1	0.112	0.093	1.2	1.3	1.6
VLS3015T-4R7MR99	4.7	±20	1	0.136	0.113	0.99	1.1	1.4
VLS3015T-6R8MR86	6.8	±20	1	0.211	0.176	0.86	0.96	1.1
VLS3015T-100MR70	10	±20	1	0.276	0.234	0.7	0.78	1
VLS3015T-150MR58	15	±20	1	0.422	0.352	0.58	0.64	0.8
VLS3015T-220MR45	22	±20	1	0.622	0.518	0.45	0.5	0.6
VLS3015T-330MR36	33	±20	1	0.959	0.799	0.36	0.4	0.5
VLS3015T-470MR31	47	±20	1	1.406	1.172	0.31	0.34	0.4


* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

- Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS3015T-1R0N2R0

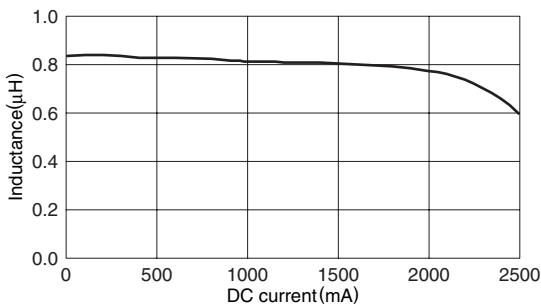


VLS3015T-1R5N1R6

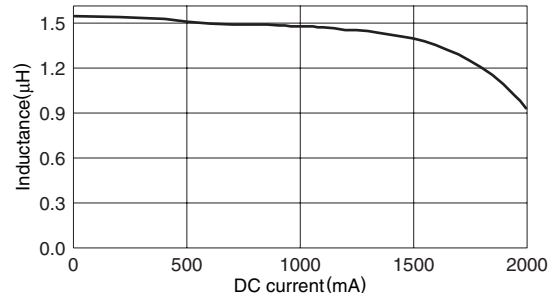


- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.


TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS3015T-2R2M1R4

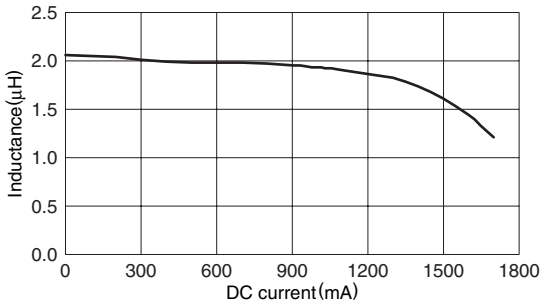


VLS3015T-3R3M1R2

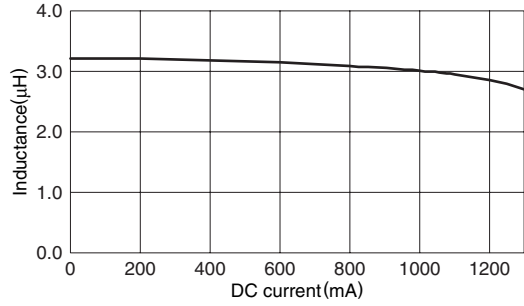


VLS3015T-4R7MR99

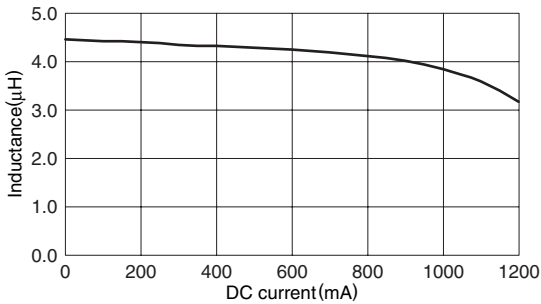


VLS3015T-6R8MR86

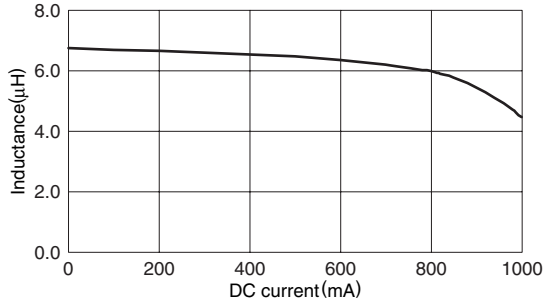


VLS3015T-100MR70

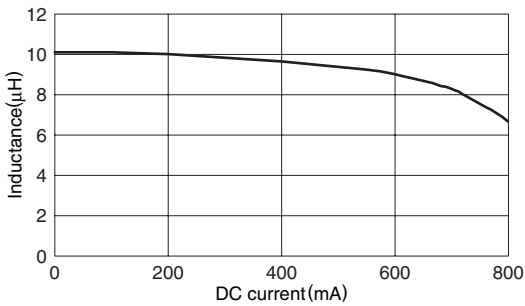


VLS3015T-150MR58

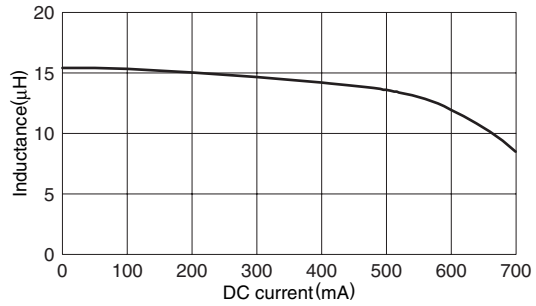


VLS3015T-220MR45

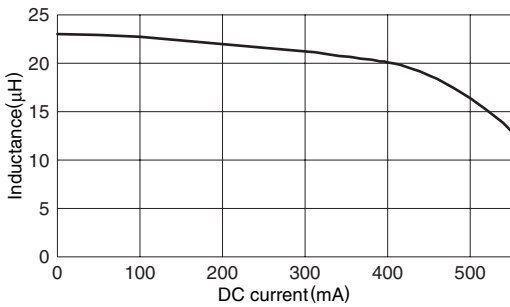


VLS3015T-330MR36

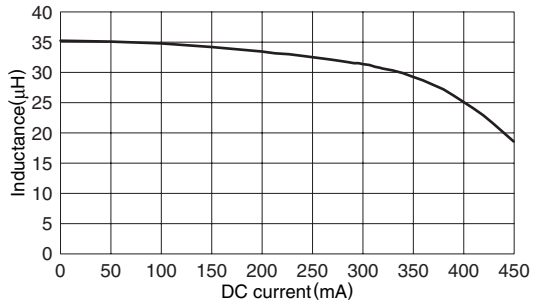

VLS3015T-470MR31

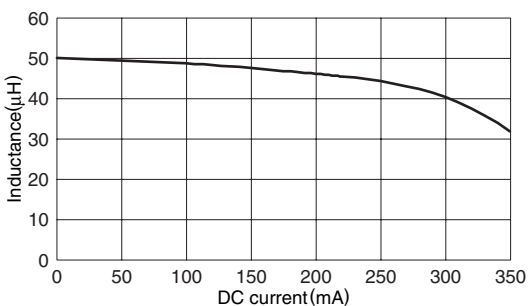

TEST CIRCUIT



• All specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [TDK](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#)
[MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#)
[PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#)
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)