


720-1000W Conduction Cooled Power Supplies

<https://product.tdk.com/en/power/cpfe>
<https://www.emea.lambda.tdk.com/uk/products/cpfe1000fi>

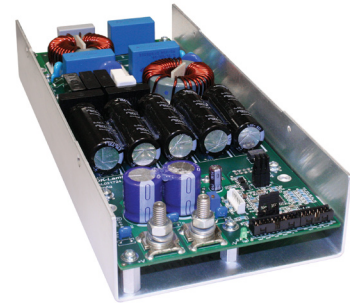


The CPFE1000Fi series industrial AC-DC power supplies offer output power up to 1008W in a conduction cooled low profile package. Features include voltage and current programming, remote on/off, remote sense, a standby supply, i²C communication, and wide operating temperature range of -40°C to +70°C. The CPFE1000Fi is designed to meet MIL-STD-810F vibration and shock.

Features	Benefits
• Smaller Size Than CPFE1000F	• Easier Integration For Industrial Systems
• Base Plate Cooled, No Fan Required	• Quiet Operation, Long Field Life
• Protective Coating Option	• Enables Use In Harsh Environments
• I ² C Interface	• Allows Remote Monitoring

Model Selector				
Model	Nominal Output Voltage (V)	Adjustment Range (V)	Maximum Current (A)	Max Power (W) @ 45°C
CPFE1000FI-12	12	9.6 - 14.4	60	720
CPFE1000FI-28	28	22.4 - 33.6	36	1008
CPFE1000FI-48	48	38.4 - 57.6	21	1008

Part Numbering Scheme

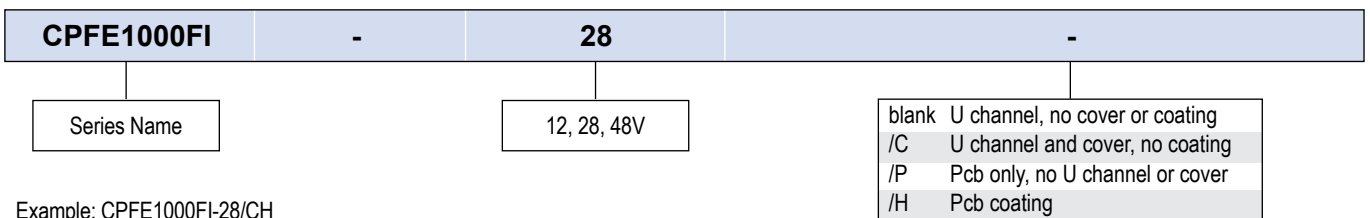

Derating Ambient Temperature ⁽¹⁾					
Model	Input Voltage	Output Power (W)			
		45°C	50°C	60°C	70°C
CPFE1000FI-12	85Vac to 170Vac	720	720	720	720
	170Vac to 265Vac	720	720	720	720
CPFE1000FI-28	85Vac to 170Vac	1008	980	952	896
	170Vac to 265Vac	1008	1008	1008	1008
CPFE1000FI-48	85Vac to 170Vac	1008	1008	1008	1008
	170Vac to 265Vac	1008	1008	1008	1008

Specification				
Model		CPFE1000FI-12	CPFE1000FI-28	CPFE1000FI-48
Input				
Input Voltage range	Vac	90 - 265		
Input Frequency	Hz	47 - 63		
Input Current (110 / 220Vac)	A	13.6 / 6.6 (Model dependent)		
Inrush Current (110 / 220Vac)	A	23 / 46 peak		
Leakage Current (at 230Vac, 50Hz)	uA	<1.5		
Power Factor	-	0.95 typical (meets EN61000-3-2)		
Hold Up Time (typ) at 230Vac Input	ms	20 @ 25°C and warmer		
Efficiency (Typical, 100% load, 110 / 220Vac)	%	79 / 81	83 / 86	83 / 86
Conducted & Radiated EMI	-	Conducted: EN55032/EN55011 Class B, Radiated: Class A		
Immunity	-	See Immunity table		
Line Dip	-	Complies with SEMI F47 (200Vac line only)		
Safety Certifications and Markings	-	IEC/UL/CSA/EN62368-1, 60950-1, CE Mark and UKCA Mark		

Immunity				
Test	Standard	Test Level	Criteria	Notes
ESD	IEC 61000-4-2	±8 kV air discharge, ±4 kV contact discharge	B	See test report
Radiated Susceptibility	IEC 61000-4-3	10 V/m from 80-1000 MHz (80% AM at 1kHz)	A	
Electrical Fast Transient Burst	IEC 61000-4-4	Power line pulses of ± 2kV; I/O line pulses of ± 1kV	B	
Surge	IEC 61000-4-5	±2kV common mode, ±1kV differential mode	B	
Conducted Susceptibility	IEC 61000-4-6	10 Vrms, 150 kHz - 80 MHz 1 kHz 80% AM	B	
Magnetic fields	IEC 61000-4-8	Inductive loop at 50 Hz, to 1.0 amps (rms) per meter	A	
Voltage Dips and Input Interruptions	IEC 61000-4-11	Voltage Dips of 30% and >95%; Interruptions of >95%.	B / C	
Ring Wave	IEC 61000-4-12	±1kV, ±2kV common mode surges. ±0.5kV, ±1kV differential mode surges.	B	
Voltage Fluctuation	EN 61000-4-14	Level 3 ΔU=12% Un	A	


Specification				
Model		CPFE1000FI-12	CPFE1000FI-28	CPFE1000FI-48
Output				
Line Regulation	mV	48	56	96
Load Regulation	mV	48	56	96
Temperature Coefficient	ppm/°C	200		
Ripple & Noise (20MHz BW) (2)	%	1 (2 below 0°C)		
Minimum Load	A	None		
Overcurrent Protection	%	105 - 140 (Automatic Recovery)		
Overvoltage Protection	%	125 - 145 (Automatic Recovery)		
Overtemperature Protection	°C	Shuts down between 90 - 115 (Auto Recovery)		
Remote Sense	-	Yes, compensates up to 500mV cable drop		
Remote On/Off (Opto Isolated)	-	High = ON		
Power On Signal (ENA)	-	Open Collector (10mA sink current). Low (on) when output is present		
Auxiliary Supply	-	10 - 14V, 20mA		
Parallel Operation	-	Yes, single wire		
Series Operation	-	Possible, see installation manual		

Specification		CPFE1000FI-12	CPFE1000FI-28	CPFE1000FI-48
Environmental				
Operating Temperature	°C	-40 to +70 ambient, (85 baseplate maximum) (see installation manual for derating)		
Storage Temperature	°C	-40 to +100		
Humidity (non condensing)	%RH	Operating: 20 - 90, Non operating: 10 - 95 (PCB assembly protective coated)		
Cooling	-	Conduction cooled		
Altitude	m	3000		
Withstand Voltage	Vdc	Input to Ground 2121, Input to Output 4242, Output to Ground 500		
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & 500Vdc		
Vibration (Non operating)	-	MIL-STD-810F, Method 514.5, Proc I, Category 4, 10		
Shock	-	MIL-STD-810F, Method 516.5, Procedure I, IV & VI		
Other				
Weight (Typ)	g	1240 (without cover)		
Size (WxHxD)	mm	112 x 43 x 254 (262mm including AC connector)		
Size (WxHxD)	Inches	4.4 x 1.69 x 9.9		
MTBF - Telcordia	Hours	98,173 hours Method 1, Ground Benign, 25C, 100Vac input, 85C baseplate		
Warranty	Years	2		



I ² C Interface	
Output Voltage Monitoring	
Output Current Monitoring	
Base Plate Temperature Monitoring	
Remote On/Off Programming	
IOG, DC Good, over temperature warning	
Reading Manufacturing Related Data	

- (1) Models mounted in the horizontal orientation. See instruction manual for alternative mounting positions and the corresponding derating guidelines.
- (2) Warm up period of 30 minutes below -30°C for ripple. Jeita RC-9131C Method, see instruction manual for test methods.

Outline Drawing U Channel

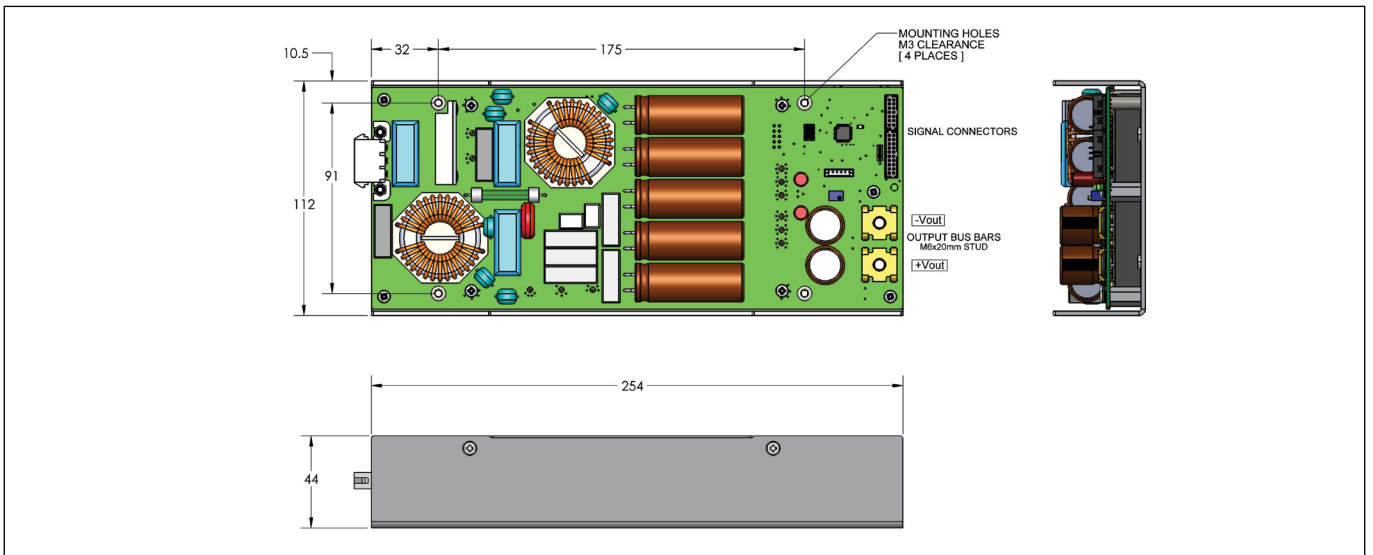




Outline Drawing with Cover (IC)

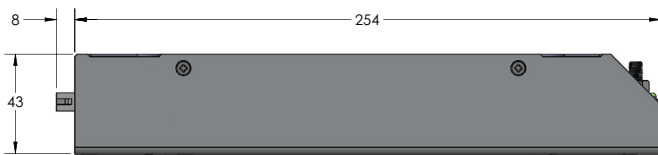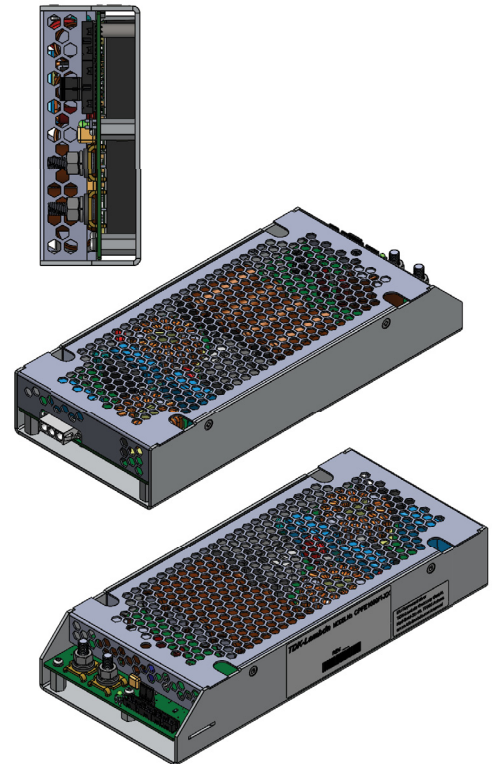

CONDUCTION COOLED POWER SUPPLY:
720W TO 1000W
(SHOWN WITH OPTIONAL COVER)

12V (9.6V-14.4V) @ 60A MAX.
28V (22.4V - 33.6V) @ 36A MAX.
48V (38.4V - 57.6V) @ 21A MAX.

Outline Drawing Open Frame (IP)

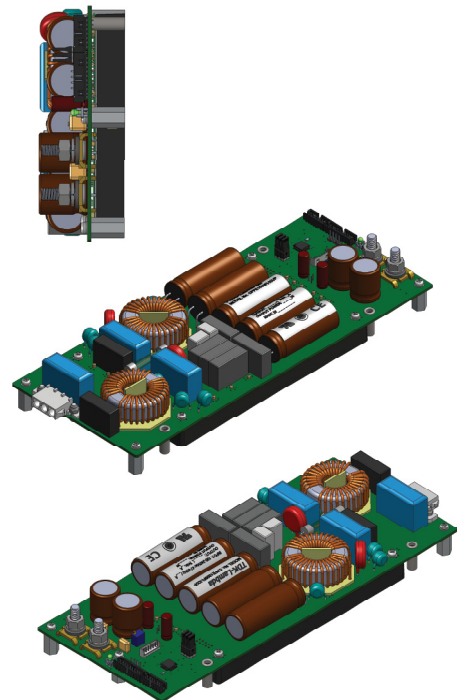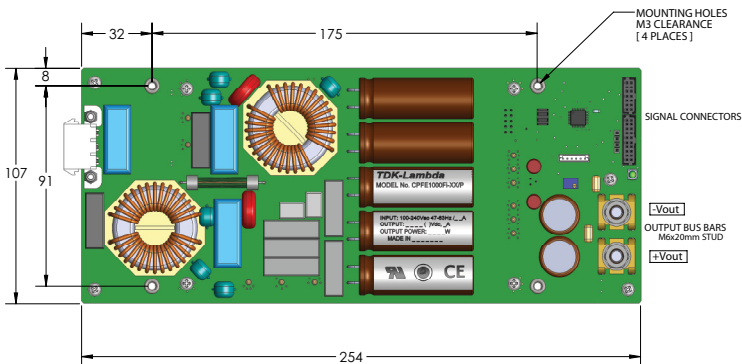

CONDUCTION COOLED POWER SUPPLY:
720W TO 1000W
(/P OPTION SHOWN)

12V (9.6V-14.4V) @ 60A MAX.
28V (22.4V - 33.6V) @ 36A MAX.
48V (38.4V - 57.6V) @ 21A MAX.



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
france@fr.tdk-lambda.com
www.emea.lambda.tdk.com/fr



Italy Sales Office

Tel: +39 02 61 29 38 63
info.italia@it.tdk-lambda.com
www.emea.lambda.tdk.com/it



Netherlands

info@nl.tdk-lambda.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Tel: +49 7841 666 0
info@de.tdk-lambda.com
www.emea.lambda.tdk.com/de



Austria Sales Office

Tel: +43 2256 655 84
info@at.tdk-lambda.com
www.emea.lambda.tdk.com/at



Switzerland Sales Office

Tel: +41 44 850 53 53
info@ch.tdk-lambda.com
www.emea.lambda.tdk.com/ch



Nordic Sales Office

Tel: +45 8853 8086
info@dk.tdk-lambda.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
info@uk.tdk-lambda.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
info@tdk-lambda.co.il
www.emea.lambda.tdk.com/il



C.I.S.

Commercial Support:

Tel: +7 (495) 665 2627

Technical Support:

Tel: +7 (812) 658 0463
info@tdk-lambda.ru
www.emea.lambda.tdk.com/ru



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
powersolutions@us.tdk-lambda.com
www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation

Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
powersolutions@cn.tdk-lambda.com
www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
tts.mkt@sg.tdk-lambda.com
www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
mathew.philip@in.tdk-lambda.com
www.sg.lambda.tdk.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)