

SPECIFICATIONS

A233-01-01A

ITEMS		MODEL	HWS80 -3	HWS80 -5	HWS80 -12	HWS80 -15	HWS80 -24	HWS80 -48	
1	Nominal Output Voltage	V	3.3	5	12	15	24	48	
2	Maximum Output Current	A	16	16	6.7	5.4	3.4	1.7	
3	Maximum Output Power	W	52.8	80	80.4	81	81.6	81.6	
4	Efficiency (Typ) (*1)	100VAC	%	77	82	82	82	83	84
		200VAC	%	79	85	85	85	85	86
5	Input Voltage Range (*2)	-	85 ~ 265VAC (47 ~ 63Hz) or 120 ~ 370VDC						
6	Input Current (100/200VAC)(Typ) (*1)	A	0.72/0.36	1.04/0.52					
7	Inrush Current(Typ) (*3)	-	14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start						
8	PFHC	-	Built to meet IEC61000-3-2						
9	Power Factor (100/200VAC)(Typ) (*1)	-	0.98/0.90	0.99/0.95					
10	Output Voltage Range	V	2.97~3.96	4.0~6.0	9.6~14.4	12.0~18.0	19.2~28.8	38.4~52.8	
11	Maximum Ripple & Noise (*4)	0≤Ta<70°C	mV	120	120	150	150	150	200
		-10≤Ta<0°C	mV	160	160	180	180	180	240
12	Maximum Line Regulation (*5)	mV	20	20	48	60	96	192	
13	Maximum Load Regulation (*6)	mV	40	40	96	120	192	384	
14	Temperature Coefficient	-	Less than 0.02% / °C						
15	Over Current Protection (*7)	A	16.8 ~	16.8 ~	7.04 ~	5.67 ~	3.57 ~	1.79 ~	
16	Over Voltage Protection (*8)	V	4.13~4.95	6.25~7.25	15.0~17.4	18.8~21.8	30.0~34.8	55.2~64.8	
17	Hold-up Time (Typ) (*9)	-	20ms						
18	Leakage Current (*10)	-	Less than 0.5mA. 0.2mA(Typ) at 100VAC / 0.4mA(Typ) at 230VAC						
19	Remote Sensing	-	Possible						
20	Parallel Operation	-	-						
21	Series Operation	-	Possible						
22	Operating Temperature (*11)	-	-10 ~+70°C (-10 ~+50°C:100%,+60°C:60%,+70°C:20%)						
23	Operating Humidity	-	30 ~ 90%RH (No dewdrop)						
24	Storage Temperature	-	-30 ~ +85°C						
25	Storage Humidity	-	10 ~ 95%RH (No dewdrop)						
26	Cooling	-	Convection Cooling						
27	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (100mA) for 1min						
28	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC						
29	Vibration	-	At no operating, 10 ~ 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.						
30	Shock (In package)	-	Less than 196.1m/s ²						
31	Safety (*12)	-	Approved by UL60950-1, CSA60950-1, EN60950-1, EN50178 Built to meet UL508, DENAN						
32	Line DIP	-	Built to meet SEMI-F47 (200VAC Line only)						
33	Conducted Emission	-	Built to meet EN55011/EN55022-B, FCC-B, VCCI-B						
34	Radiated Emission	-	Built to meet EN55011/EN55022-B, FCC-B, VCCI-B						
35	Immunity	-	Built to meet IEC61000-4-2(Level 2,3), -3(Level 3), -4(Level 3), -5(Level 3,4), -6(Level 3), -8(Level 4), -11						
36	Weight(Typ.)	-	450g						
37	Size (W x H x D)	mm	28 x 82 x 160 (Refer to Outline Drawing)						

*Read instruction manual carefully, before using the power supply unit.


=NOTES=

- *1. At 100/200VAC, Ta=25°C and maximum output power.
- *2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 ~ 240VAC(50/60Hz).
- *3. Not applicable for the in-rush current to Noise Filter for less than 0.2ms.
- *4. Measure with JEITA RC-9131A probe, Bandwise of scope :100MHz.
- *5. 85 ~ 265VAC , constant load.
- *6. No load-Full load, constant input voltage.
- *7. Constant current limit and Hiccup with automatic recovery.
Not operate at over load or dead short condition for more than 30seconds.
- *8. OVP circuit will shutdown output, manual reset (Re power on).
- *9. At 100/200VAC , nominal output voltage and maximum output current.
- *10. Measured by the each measuring method of UL,CSA,EN and DENAN(at 60Hz).
- *11. Ratings - Derating at standard mounting.
- Load (%) is percent of maximum output power or maximum output current, whichever is greater.
- As for other mountings, refer to derating curve (A233-01-02_).
- *12. As for DENAN, built to meet at 100VAC.

OUTPUT DERATING

A233-01-02

Ta(°C)	LOAD(%)	
	MOUNTING A	MOUNTING B,C,D
-10 ~+40	100	100
50	100	80
60	60	60
70	20	20

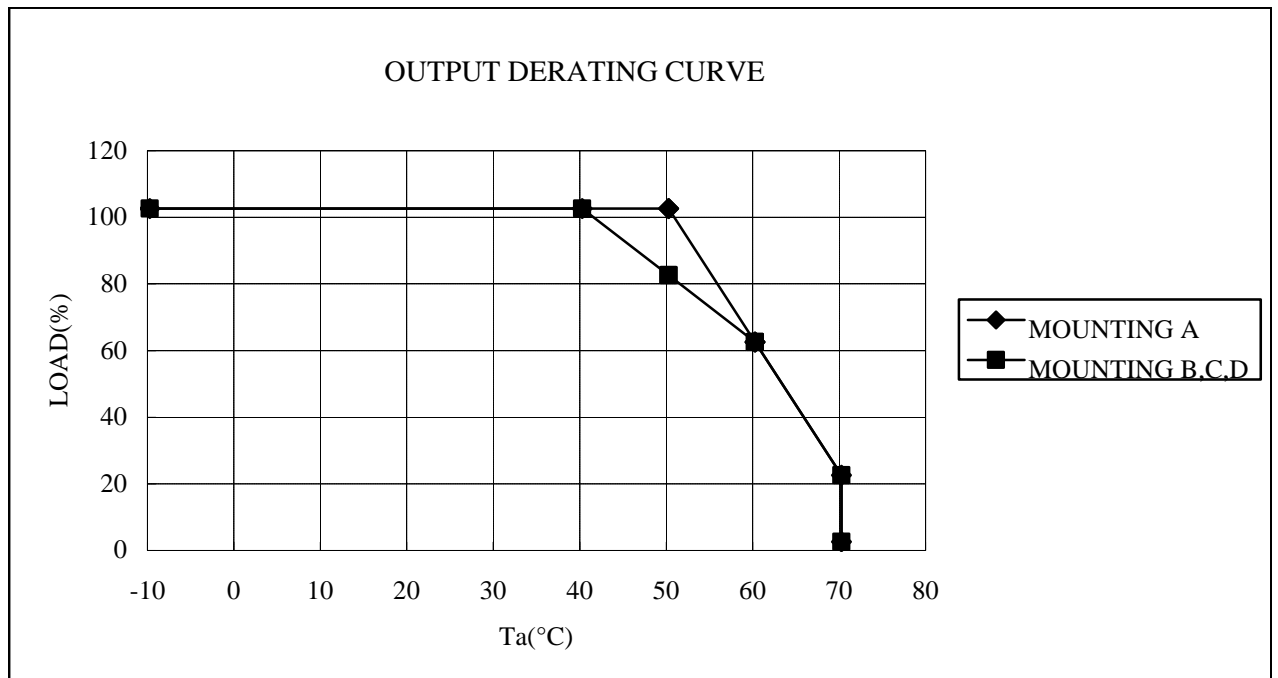

MOUNTING A


MOUNTING B

MOUNTING C

MOUNTING D

DON'T USE

(STANDARD MOUNTING)

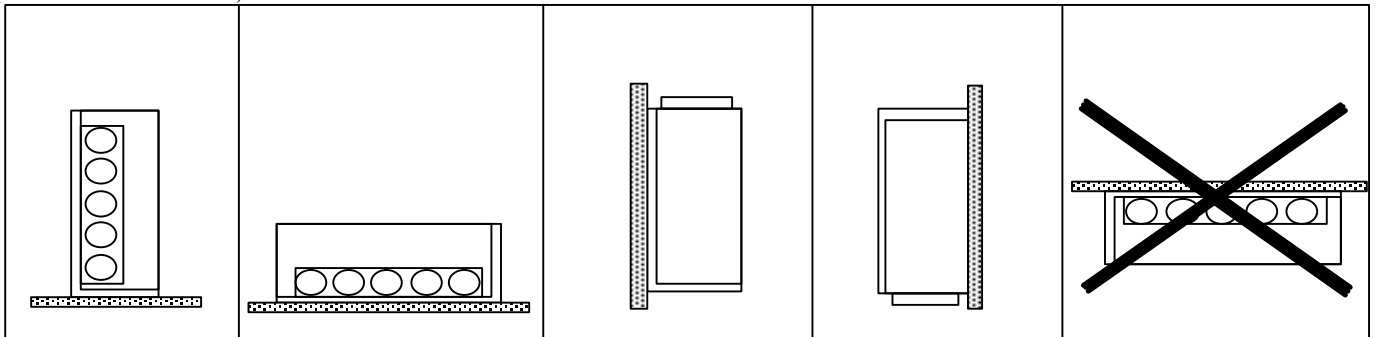

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [S-15F-12](#) [LDIN100150](#) [LPM000-BBAR-01](#) [LPX17S-C](#) [EVS57-10R6/R](#)
[FDC40-24S12](#) [FP80](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#) [432703037161](#) [WRB01X-U](#)
[LPX140-C](#) [08-30466-1040G](#) [09-160CFG](#) [70841004](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#)
[LPM124-OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [DMB-EWG](#) [TVQF-](#)
[1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [XPFM201A+](#) [MAP80-4000G](#) [LFP300F-24-TY](#) [SMP21-L20-DC24V-5A](#) [VI-MUL-ES](#) [08-30466-](#)
[0065G](#) [CME240P-24](#) [VI-RU031-EWWX](#) [08-30466-0028G](#)