


## 110W, 20A Non-isolated SMT Point Of Load

### Features

- ◆ DOSA Compatible Footprint
- ◆ Surface Mountable
- ◆ Constant Switching Frequency
- ◆ Edge Plated Castellations (EPC)
  - Inspectable Solder Joints
- ◆ No external loop tuning components needed
- ◆ Excellent Transient Response

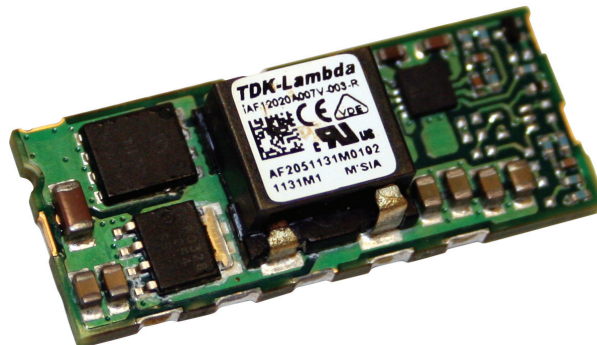

### Key Market Segments & Applications




Specifications			
Model		iAF05	iAF12
DC Output Voltage	V	0.6 - 3.63	0.7 - 5.5
DC Input Voltage	V	2.4 - 5.5	4.5 - 14
Efficiency	%	85 - 93.5	82 - 93.5
Output Voltage Tolerance	%		±3
Switching Frequency	kHz		600
Line Regulation	mV	4	3
Load Regulation	mV	7	7
External Load Capacitance	uF		200 - 2000
Output Ripple and Noise	mVpp	20	10
Overcurrent Protection	A		Hiccup Type
Remote On / Off	-		Negative Logic (For Positive Logic Contact Factory)
Remote Sense	-		(+) Sense, compensating up to 0.5V
Power Good	-	Not available	Yes, Low on fail
Operating Temp	°C		-40 to 115 (see thermal data on website)
Storage Temperature	°C		-55 to 125
Safety Agency Approvals	-		IEC/UL/CSA/EN62368-1, 60950-1, CE Mark
Weight	g / oz		5.5g / 0.194 oz
Size (LxWxH)	mm / in.		33 x 13.46 x 7.75 / 1.3 x 0.53 x 0.305
Warranty	yrs		3 years

## Model Selector

Model	Input Voltage (V)	Output Current (A)	Output Voltage (V)	Positive Logic On/Off	Negative Logic On/Off	Sequencing	Solder Bumping
iAF05020A006V-003-R	2.4 - 5.5	20	0.6 - 3.63	-	yes	-	EPC
iAF05020A006V-007-R	2.4 - 5.5	20	0.6 - 3.63	-	yes	-	LGA
iAF12020A007V-003-R	4.5 - 14	20	0.7 - 5.5	-	yes	-	EPC
iAF12020A007V-007-R	4.5 - 14	20	0.7 - 5.5	-	yes	-	LGA

## Preferred Model

## Outline Drawing (EPC Type)

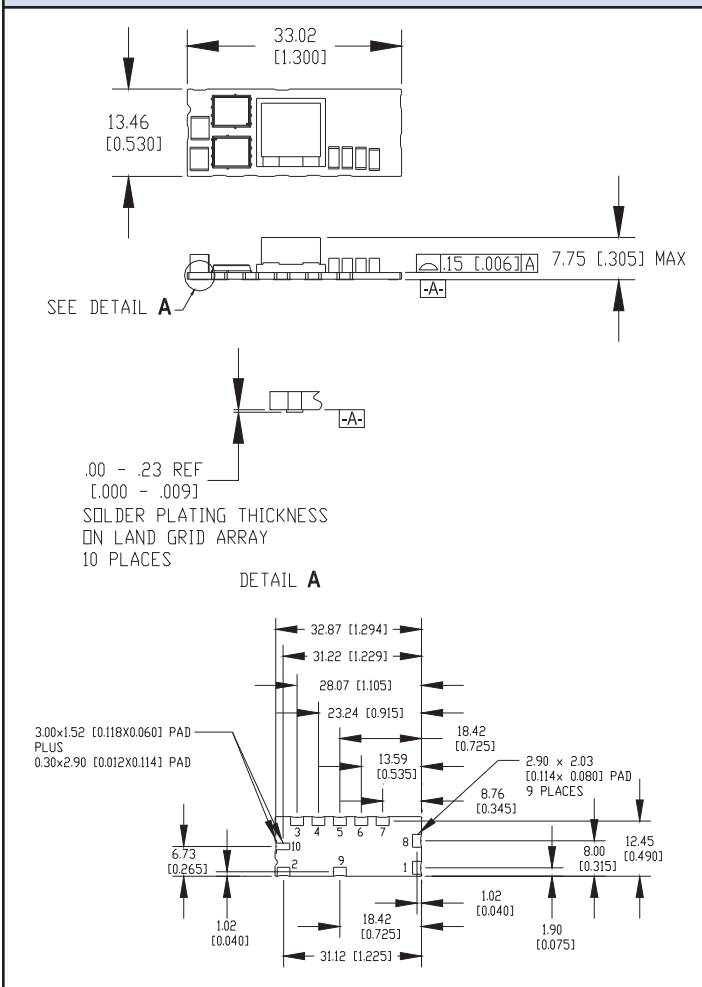

## Pinout

PIN	Function	PIN	Function
1	ON / OFF	6	TRIM
2	VIN	7	SENSE (+)
3	Reserved	8	Reserved
4	GND	9	PWR GOOD
5	VOUT	10	Reserved

## Other Industrial Products

CC-E	1.5 - 30W 5, 12, 24 or 48V input isolated DC-DC converters
PX	10 - 60W 12, 24 or 48V input isolated DC-DC converters
iBF, iCF, iCG	3 - 12A DOSA2 non isolated DC-DC converters

For Additional Information, please visit  
<https://product.tdk.com/en/power/>



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Non-Isolated DC/DC Converters](#) category:*

*Click to view products by [TDK-Lambda](#) manufacturer:*

Other Similar products are found below :

[PSR152.5-7IR](#) [APTH003A0X-SRZ](#) [SPM1004-3V3C](#) [R-785.0-05](#) [10E24-P15-10PPM](#) [1E24-P4-25PPM-SHV-5KV](#) [PROPOWER-3.3V](#)  
[MYGTM01210BZN](#) [JRCS016A0S4-HZ](#) [40C24-N250-I5-H](#) [40A24-P30-E](#) [10C24-N250-I10-AQ-DA](#) [4AA24-P20-M-H](#) [3V12-N0.8](#) [3V24-P1](#)  
[3V24-N1](#) [BMR4672010/001](#) [BMR4652010/001](#) [6AA24-P30-I5-M](#) [6AA24-N30-I5-M](#) [BM2P101X-Z](#) [ROF-78E12-0.5SMD-R](#) [RPMA5.0-](#)  
[8.0/OF](#) [PTV03010WAD](#) [PTV05020WAH](#) [PTV12010LAH](#) [PTV12020WAD](#) [R-7212D](#) [R-7212P](#) [R-78AA5.0-1.0SMD](#) [30A24-N15-E](#) [10A12-](#)  
[P4-M](#) [10C24-N250-I5](#) [10C24-P125](#) [10C24-P250-I5](#) [6A24-P20-I10-F-M-25PPM](#) [1A24-P30-F-M-C](#) [TSR 1-24150SM](#) [1/2AA24-N30-I10](#)  
[1C24-N125](#) [12C24-N250](#) [V7806-1500](#) [PTV12020LAH](#) [PTV05010WAH](#) [PTN04050CAZT](#) [PTH12020WAD](#) [PTH12020LAS](#)  
[PTH05050YAH](#) [PTH05T210WAH](#) [PTH05030WAZ](#)