

150W, 40A Non-isolated SMT Point of Load

Features

- ◆ DOSA Compatible Footprint
- ◆ Surface Mountable
- ◆ Constant Switching Frequency
- ◆ No external loop tuning components needed
- ◆ Excellent Transient Response



Key Market Segments & Applications



Specifications


Model		iAH12
DC Output Voltage	V	0.7 - 5.5
DC Output Current	A	40A max (Vo, set ≤ 2.5V and Vin > 4.5V. Observe max. power limit) 30A max (Vo, set > 2.5V or Vin < 4.5V. Observe max. power limit)
DC Output Power (max)	W	150
DC Input Voltage	V	3.5 - 17
Efficiency	%	84 - 96
Output Voltage Tolerance	%	±3
Switching Frequency	kHz	600
Line Regulation	mV	4
Load Regulation	mV	7
External Load Capacitance	uF	200 - 2000
Output Ripple and Noise	mVpp	20
Overcurrent Protection	A	50A typical
Remote On / Off	-	Yes, see model selector table
Remote Sense	-	(+) Sense, compensating up to 0.5V
Power Good	-	Yes, Low on fail
Operating Temperature	°C	-40 to 115 (see thermal data on website)
Storage Temperature	°C	-55 to 125
Safety Agency Certifications	-	IEC/UL/CSA/EN62368-1, 60950-1, CE Mark
Weight	g/oz	12g / 0.42 oz
Size (LxWxH)	mm/in.	33 x 13.5 x 10.2 / 1.3 x 0.53 x 0.4
Warranty	yrs	3 years

Model Selector


Input Model	Input Voltage (V)	Output Current (A)	Output Voltage (V)	Positive Logic On/Off	Negative Logic On/Off	Sequencing
iAH12040A007V-006-R	3.5 - 17	40	0.7 - 5.5	yes	-	-
iAH12040A007V-007-R	3.5 - 17	40	0.7 - 5.5	-	yes	-

Preferred

Outline Drawing

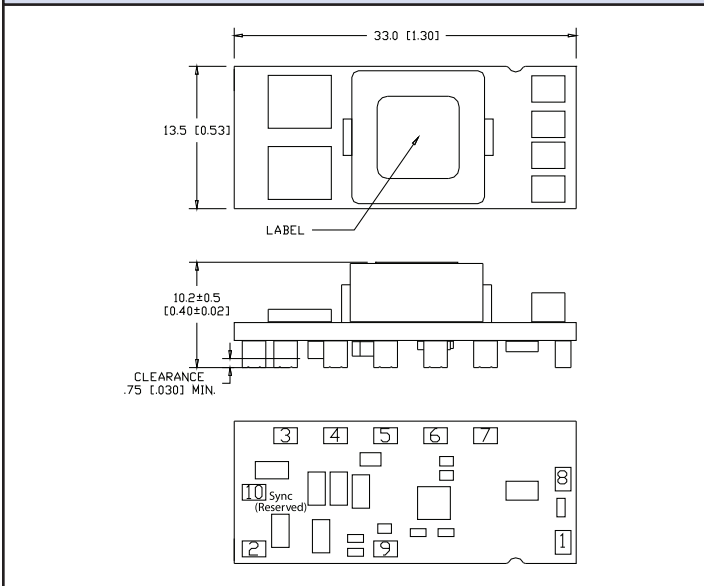

Voltage Operating Range

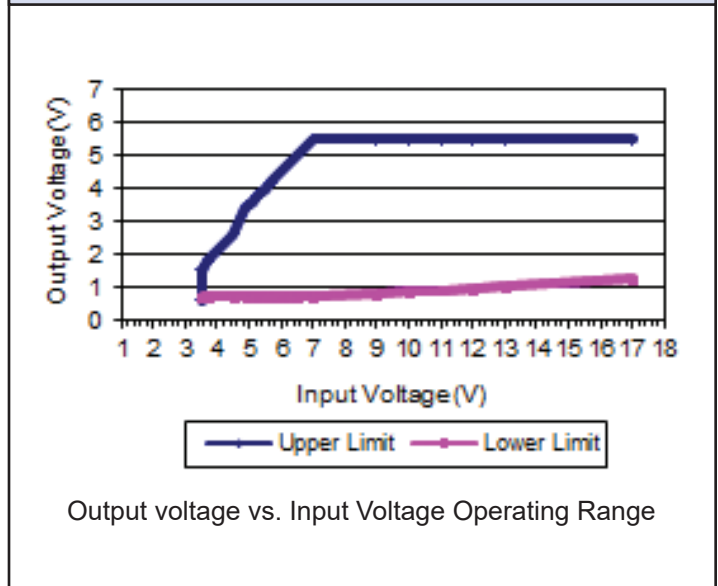

Pinout

PIN	Function	PIN	Function
1	ON / OFF	6	TRIM
2	VIN	7	SENSE (+)
3	SEQ (Option)*	8	SENSE (-) (Reserved)**
4	GND	9	PWR GOOD
5	VOUT	10	Sync (Reserved)**

* Contact Technical Support . Pin 3 is not populated if SEQ option is not selected.

** SMT pins are not populated

For Additional Information, please visit <https://product.tdk.com/en/power/>



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Non-Isolated DC/DC Converters](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[PSR152.5-7IR](#) [APTH003A0X-SRZ](#) [SPM1004-3V3C](#) [R-785.0-05](#) [10E24-P15-10PPM](#) [1E24-P4-25PPM-SHV-5KV](#) [PROPOWER-3.3V](#)
[MYGTM01210BZN](#) [JRCS016A0S4-HZ](#) [40C24-N250-I5-H](#) [40A24-P30-E](#) [10C24-N250-I10-AQ-DA](#) [4AA24-P20-M-H](#) [3V12-N0.8](#) [3V24-P1](#)
[3V24-N1](#) [BMR4672010/001](#) [BMR4652010/001](#) [6AA24-P30-I5-M](#) [6AA24-N30-I5-M](#) [BM2P101X-Z](#) [ROF-78E12-0.5SMD-R](#) [RPMA5.0-](#)
[8.0/OF](#) [PTV03010WAD](#) [PTV05020WAH](#) [PTV12010LAH](#) [PTV12020WAD](#) [R-7212D](#) [R-7212P](#) [R-78AA5.0-1.0SMD](#) [30A24-N15-E](#) [10A12-](#)
[P4-M](#) [10C24-N250-I5](#) [10C24-P125](#) [10C24-P250-I5](#) [6A24-P20-I10-F-M-25PPM](#) [1A24-P30-F-M-C](#) [TSR 1-24150SM](#) [1/2AA24-N30-I10](#)
[1C24-N125](#) [12C24-N250](#) [V7806-1500](#) [PTV12020LAH](#) [PTV05010WAH](#) [PTN04050CAZT](#) [PTH12020WAD](#) [PTH12020LAS](#)
[PTH05050YAH](#) [PTH05T210WAH](#) [PTH05030WAZ](#)