


36-83W Sixteenth Brick Converter

Features

- ◆ Standard Sixteenth Brick Footprint (DOSA)
- ◆ 36 - 75VDC Input
- ◆ 1.2V 30A - 12V 6.5A Nominal Outputs
- ◆ Through Hole Mounting
- ◆ Low 12.7mm Profile
- ◆ 1500VDC Basic Isolation
- ◆ High operating efficiency (up to 90%)
- ◆ Constant switching frequency
- ◆ 44% smaller than eighth bricks

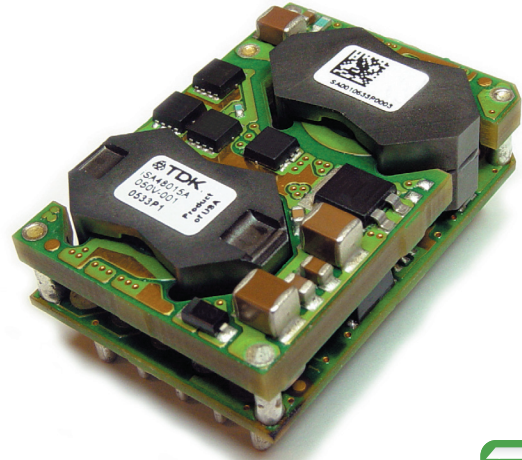

Key Market Segments & Applications



Specifications		iSA480					
Model		1.2	1.5	1.8	3.3	5	12
Nominal Output Voltage	VDC	1.2	1.5	1.8	3.3	5	12
Input Voltage Range	VDC	36 - 75					
Input Current (max)	A	4					
Output Voltage Tolerance	VDC	1.164-1.236	1.45-1.55	1.74-1.86	3.20-3.40	4.85-5.15	11.58-12.42
Ripple & Noise (max) (pk - pk)	mV	75mV		100mV		200mV	
Line Regulation (typical)	mV	2		7		10	
Load Regulation (typical)	mV	3		8		10	
Overload Protection (typ)	A	39		40		22	
Overvoltage Protection	VDC	1.5 - 2.0V	1.7 - 2.3	2.1 - 2.6	3.75-4.65	5.7-6.7	13.6-15.7
Remote Sense	-	Yes					
Remote On / Off	-	Yes					
Temperature (operating)	°C	-40 to 125					
Temperature (storage)	°C	-55 to 125					
Humidity (operating)	-	20-95% RH Non condensing					
Humidity (storage)	-	10-95% RH Non condensing					
Cooling	-	Convection or forced air					
Isolation Voltage	VDC	1500					
Vibration (non operating)	-	5 to 50Hz @ 0.5g (4.9m/s ²), and 50 to 500Hz @ 1.5g (14.7m/s ²) per Bellcore TR-EOP-000063-5.4.4					
Shock	-	196.1m/s ²					
Safety Agency Approvals	-	IEC/UL/CSA/EN62368-1, 60950-1, CE Mark					
Weight	g	30.4					
Size	mm	33 x 22.9 x 12.7					
Warranty	-	3 Years					


Notes: See website for detailed specifications

Model Selector

Model	Output Voltage (V)	Output Adjust (V)	Output Curr. (A)	Max. Output Power (W)	Efficiency at Full Load (%)	Pos. Logic On/Off	Neg. Logic On/Off	Pin Length
iSA48030A012V-000-R	1.2	1.08 - 1.32	30	36	75	X	-	0.145
iSA48030A012V-001-R	1.2	1.08 - 1.32	30	36	75	-	X	0.145
iSA48030A015V-001-R	1.5	1.35 - 1.65	30	45	79	-	X	0.145
iSA48030A018V-001-R	1.8	1.62 - 1.98	30	54	82	-	X	0.145
iSA48025A025V-001-R	2.5	2.25 - 2.75	25	62.5	85	-	X	0.145
iSA48025A033V-000-R	3.3	2.97 - 3.63	25	82.5	88	X	-	0.145
iSA48025A033V-001-R	3.3	2.97 - 3.63	25	82.5	88	-	X	0.145
iSA48015A050V-001-R	5	4.5 - 5.5	15	75	90	-	X	0.145
iSA48007A120V-001-R	12	10.8 - 13.2	6.5	78	90	-	X	0.145
iSA48007A120V-007-R	12	10.8 - 13.2	6.5	78	90	-	X	0.180

Preferred Model

Recommended Footprint (Top View)

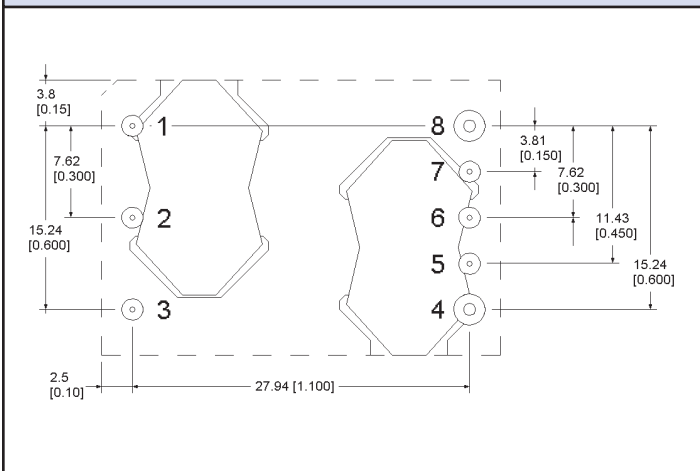

Pinout

PIN	Function
1	Vin (+)
2	On / Off
3	Vin (-)
4	Vout (-)
5	Sense (-)
6	Trim
7	Sense (+)
8	Vout (+)

For Additional Information, please visit
<https://product.tdk.com/en/power/>



Other DC-DC Products

Series	Isolation	Rating	Output	Input
CC-E	Isolated	1.5 - 30W	1 -2 Outputs	5 - 48VDC
PX	Isolated	10 - 60W	1 -3 Outputs	12 - 48VDC
iSA	Isolated	36 - 82.5W	1.2 - 12V	36 - 75VDC
iEA	Isolated	48 - 78W	5 - 28V	36 - 75VDC
iEH	Isolated	300 - 317W	9.6 - 12V	36 - 75VDC
PAE50/100	Isolated	50 - 100W	1.8 - 5V	36 - 76VDC
iQL	Isolated	72 - 308W	1.2 - 28V	18 - 75VDC
iQE	Isolated	49.4 - 204W	3.3 - 12V	18 - 75VDC
iQG	Isolated	300 - 450W	9.6 - 12V	36 - 75VDC
iHG	Isolated	300 - 456W	12V	36 - 75VDC
PAH	Isolated	30 - 450W	2.5 - 48V	18 - 76VDC
PAF	Isolated	450 - 700W	3.3 - 48V	36 - 75VDC
iJB	POL, Digital	60A	0.6 - 2.0V	8 - 14VDC
i6A	POL	250W	3.3 - 20V	9 - 40VDC
iA,iB,iC	POL	3,6,12,20A	0.6 - 5.5V	2.4 - 14VDC

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-](#)
[2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-2405](#) [XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-](#)
[R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [VI-LJ11-iz](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#)