


JWS-P-SERIES

Peak current / Single output 70 ~ 480W

LAMBDA
DENSEI-LAMBDA

Unit Type Power Supply

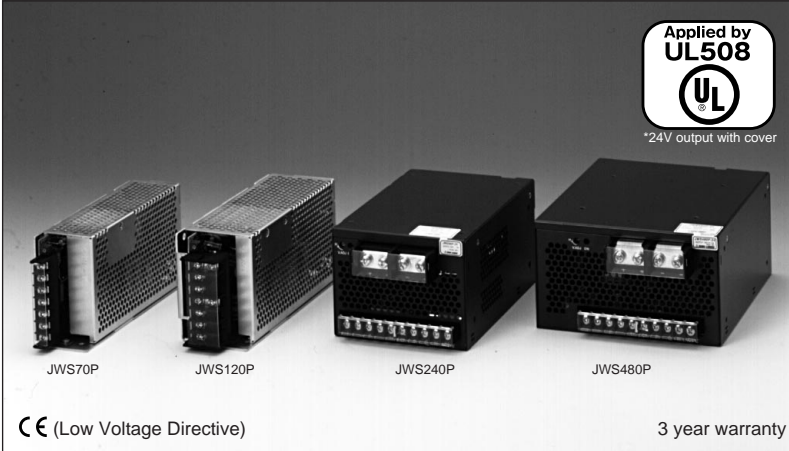

Model name

JWS120P - 24

Series name Nominal output voltage Average output power

Features

- CE marking (Low Voltage Directive)
- Applicable to peak output current, compact package
- Universal Input (85 ~ 265VAC)
- Power Factor & Harmonic Correction (Conform to EN61000-3-2)
- EMI (Built to meet EN55011-A, EN55022-A, VCCI-A, FCC-A)
- Remote ON/OFF control (JWS240P & JWS480P)

Specifications

1. Input voltage range	85 ~ 265VAC (47 ~ 63Hz) Universal input
2. Power Factor	0.99 (typ) at 100VAC Average load, 0.92 (typ) at 200VAC Average load
3. Cooling	JWS70P, JWS120P: Convection cooling, JWS240P, JWS480P: Forced air by built-in blower
4. Operating Temperature	-10 ~ +60°C (-10 ~ +50°C: 100%, +60°C: 60%)
5. Withstand Voltage	Input to output: 3kVAC (20mA), Input to FG: 2kVAC (20mA), Output to FG: 500VAC (100mA) for 1 min.
6. Conducted emission noise	Built to meet EN55011-A, EN55022-A, FCC class A, VCC I class A
7. Radiated emission noise	Built to meet EN55011-A, EN55022-A, FCC class A, VCC I class A
8. PFHC	Built to meet EN61000-3-2
9. Safety standard	Approved by UL1950 , CSA950 , EN60950 , VDE0160 and UL508 (optional, Note)
10. Functions	OVP, OCP, Thermal protection, JWS240P, JWS480P: Remote ON/OFF control

Note: JWS150P 24V output with cover model - UL508 approval is expented to be confirmed in August 2002

Line-up




Model		Output Voltage	Average Output Current	Average Output Power	Peak output Current (*1)	Peak output Power (*1)	UL	CSA	EN
JWS70P	JWS70P-24	24V	3.0A	72W	6.0A	144W	○	○	○
	JWS70P-48	48V	1.5A	72W	3.0A	144W	○	○	○
JWS120P	JWS120P-24	24V	5.0A	120W	10.0A	240W	○	○	○
	JWS120P-48	48V	2.5A	120W	5.0A	240W	○	○	○
JWS240P	JWS240P-24	24V	10.0A	240W	20.0A	480W	○	○	○
	JWS240P-36	36V	6.65A	239.4W	13.3A	478.8W	○	○	○
	JWS240P-48	48V	5.0A	240W	10.0A	480W	○	○	○
JWS480P	JWS480P-24	24V	20.0A	480W	40.0A	960W	○	○	○
	JWS480P-48	48V	10.0A	480W	20.0A	960W	○	○	○

(*1) Operating time at peak output is less than 10 seconds. (Duty \leq 0.5)

○ : Safety standard approved

Outline drawing

JWS70P

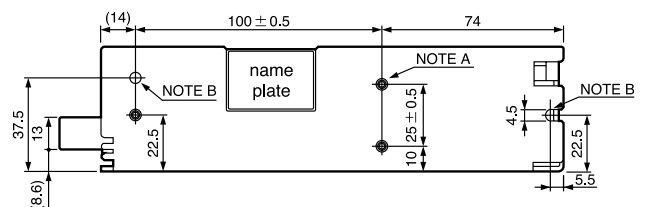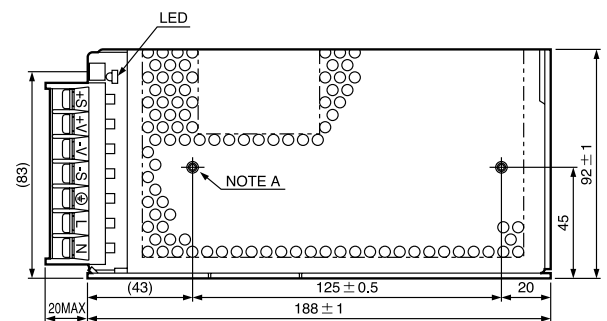

NOTES

- A: M4 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (5) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6m/m.
 B: ϕ 4.5 HOLES (2) FOR CUSTOMER CHASSIS MOUNTING. (USE M4 MOUNTING SCREWS.)

Recommended Noise Filter

MAW-1202-22





Recommended Power Supply Fixture P198

(Unit: mm)

JWS-P-SERIES

Outline drawing

JWS120P

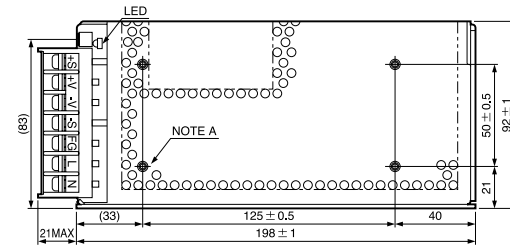

NOTES

- A: M4 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (7) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6m/m.
- B: $\phi 4.5$ HOLES (2) FOR CUSTOMER CHASSIS MOUNTING. (USE M4 MOUNTING SCREWS.)

- Recommended Noise Filter
- Recommended Power Supply Fixture

MAW-1202-22




P134



P198





P198

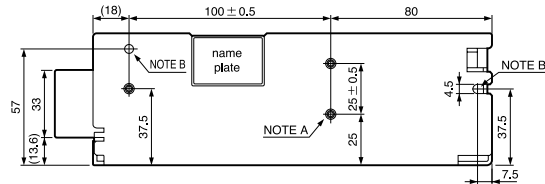


(Unit: mm)

JWS240P

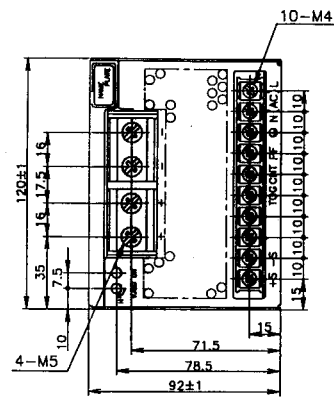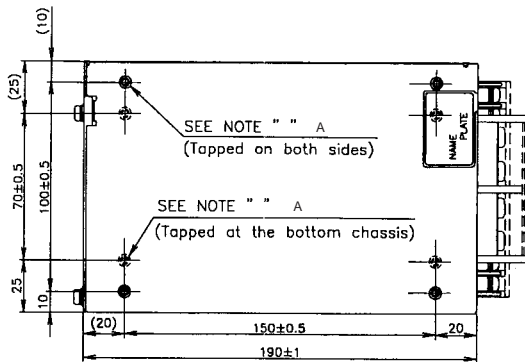

NOTE A: M4 tapped holes (20) for customer chassis mounting. [Screws must not protrude into power supply by more than 6m/m.]

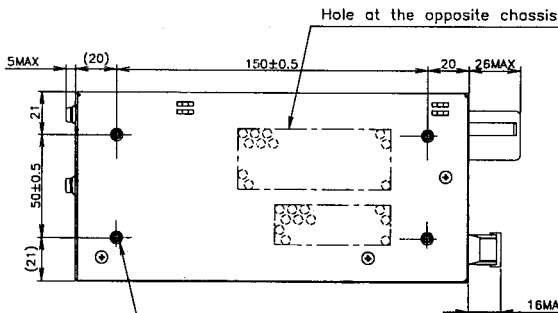

- Recommended Noise Filter

MAW-1205-22





P134




(Unit: mm)

JWS480P

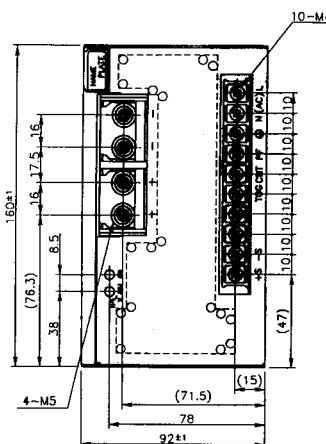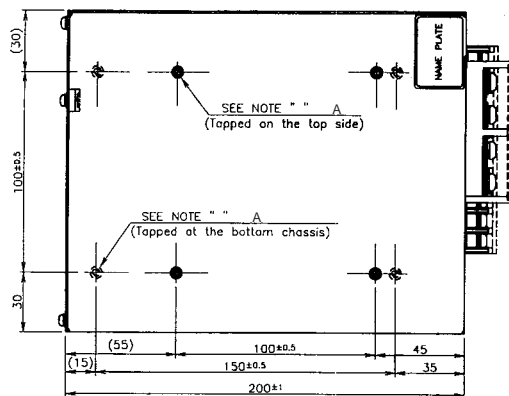

NOTE A: M4 tapped holes (16) for customer chassis mounting. [Screws must not protrude into power supply by more than 6m/m.]

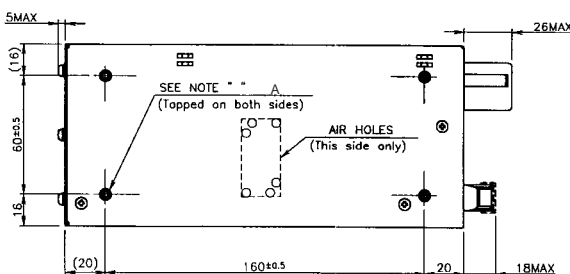

(Unit: mm)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)