

Low Profile Triple Output

Features

- ◆ 26mm height
- ◆ Outputs 2 and 3 isolated from output 1
- ◆ Universal Input (85 - 265VAC)
- ◆ Low Profile
- ◆ Wattbox design on LWT




Key Market Segments & Applications



Specifications		LWT15H	LWT30H	LWT50H
Max Output Power (typ)	W	17	30	50
Efficiency (Typ)	%	72	73	72
AC Input Voltage range	-	85 - 265VAC (47 - 440Hz)		
DC Input Voltage range	-	110 - 350VDC	110 - 330VDC	
Input Current Typ (100/200VAC)	A	0.4/0.22	0.7/0.42	1.2/0.7
Inrush Current (110/200VAC)	A	14/28	16/32	16/32
Output 1 Voltage Adjustment	-	5V: 5 to 5.25V, 12V: 12 to 12.6V, 15V: 15V to 15.75V		
Output Voltage Accuracy	-	Output 2 & 3 ±5%		
Temperature Coefficient	-	Output 1 < 1%, Output 2 or 3, <2% at 0 - 60°C		
Line Regulation	-	1%		
Load Regulation	-	2%		
Ripple & Noise	-	Output 1: 100mV, Outputs 2 & 3: 150mV		
Overcurrent Protection	-	>105%		
Overvoltage Protection	V	Main output only: 5.75 - 6.75V, manual reset		
Hold Up Time (Typ at 100VAC)	ms	20		
Series Operation	-	Possible		
Operating Temperature	-	LWT: 0°C to +60°C, derate as follows: 40°C: 100%, 50°C: 80%, 60°C: 60%		
Storage Temperature	°C	-30 to +85°C		
Operating Humidity	-	30 - 90% RH (Non condensing)		
Storage Humidity	-	10 - 95% RH (Non condensing)		
Cooling	-	Convection		
Withstand Voltage	-	Input to Gnd 2kVAC Input to Output 3kVAC (20mA)		
Isolation Resistance	-	>100M at 25C & 70%RH, Output to Ground 500VDC		
Vibration (non operating)	-	10-55Hz(1 min) <19.6m/s ² (1 hr)		
Shock	-	196.1m/s ²		
Safety Agency Approvals	-	IEC/UL/CSA/EN62368-1, 60950-1, CE Mark		
Conducted EMI	-	VDE Class B, FCC Class B		
Weight (Typ)	g	220	300	400
Size (WxHxD)	mm	Please refer to outline drawings		
Warranty	-	One Year		

Note: See Installation Manual for full details, test methods of parameters and application notes

Options				
Model	Output	Voltage	Min Current	Max Current
LWT15H-522	V1	5V	0.5	3.0
	V2	+12V	0.0	0.6
	V3	-12V	0.0	0.4
LWT15H-5FF	V1	5V	0.5	3.0
	V2	+15V	0.0	0.6
	V3	-15V	0.0	0.4
LWT15H-525	V1	5V	0.5	3.0
	V2	+12V	0.0	0.6
	V3	-5V	0.0	0.4
LWT30H-522	V1	5V	0.7	5.0
	V2	+12V	0.0	1.2
	V3	-12V	0.0	0.6
LWT30H-5FF	V1	5V	0.7	5.0
	V2	+15V	0.0	1.2
	V3	-15V	0.0	0.6
LWT30H-525	V1	5V	0.7	5.0
	V2	+12V	0.0	1.2
	V3	-5V	0.0	0.6
LWT50H-522	V1	5V	1.0	8.0
	V2	+12V	0.0	1.5
	V3	-12V	0.0	1.0
LWT50H-5FF	V1	5V	1.0	8.0
	V2	+15V	0.0	1.5
	V3	-15V	0.0	1.0
LWT50H-525	V1	5V	1.0	8.0
	V2	+12V	0.0	1.5
	V3	-5V	0.0	1.0

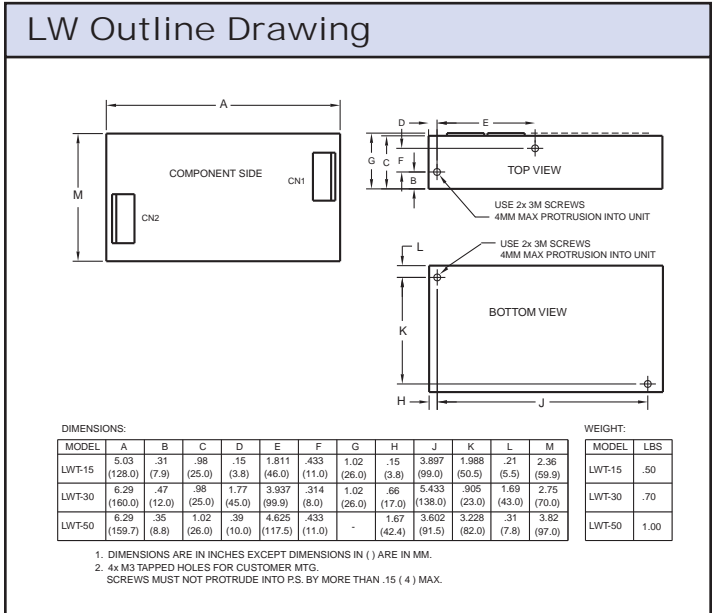

Other Industrial Products

HWS	15W-1500W Single output
ZWQ	80W-170W Quad output
ZP	20W-60W Single, dual & triple output
LS	25W-150W Single output, low cost
MTW	15W-60W Triple output

For additional information, please visit
<https://product.tdk.com/en/power/>



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)