RDEN SERIES

DC48V Line Filter



FEATURES

- Major applications : Information and Telecommunication equipment.
- High attenuation for noise from low frequency to high frequency.
- Large stud type terminals for easy connection.
- Cost effective design.
- RDEN series noise filters are for DC48V input only. (Use for AC power line is not available.)

SAFETY STANDARDS

UL60950-1 UL CSA C22.2 No. 60950-1 (cUL) UL EN60939-1/-2 (SEMKO) Ce


UL File No. E467819 UL File No. E467819 Certificate Ref. No. 1415643

PRODUCT IDENTIFICATION

RDEN -048 050 Rated current Number indicating the rated voltage Series name

CONFORMITY TO RoHS Directive

CIRCUIT DIAGRAM

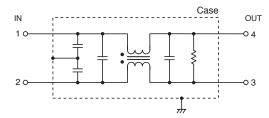


EMC filter

RDEN

ELECTRICAL CHARACTERISTICS

Part No.	Rated voltage (DC)	Rated current (DC)	Withstand voltage	Insulation resistance	Operating temperature range	With derating over	DC resistance (mΩ)	Attenuation frequency range (MHz)		Weight
								Common mode	Differential mode	(g)
								at 30dB	at 25dB	
RDEN-048050	48V (DC76V max)	50A	DC1500V 60s [Between line to ground]	500MΩ min. [DC.500V/1min]	-30 ~ +85℃	55℃	3 max.	0.2 ~ 10	0.7 ~ 30	310


DERATING GRAPH

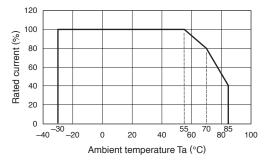


MECHANICAL


EMC

filter

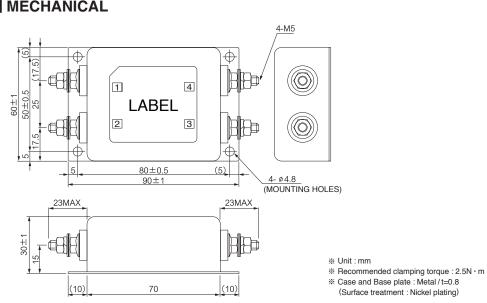

ATTENUATION vs. FREQUENCY CHARACTERISTICS



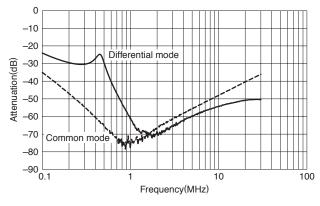

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Line Filters category:

Click to view products by TDK-Lambda manufacturer:

Other Similar products are found below :

6609019-3 6609026-5 6609030-6 6609973-2 D30A 7-1609090-5 F2810 F4456A F7382Z F7863Z FAHAV3100ZC000 806276 FN2020B-1-06 FN2080B-10-06 FN2410H-32-33 FP144 FS4153-20-06 FS4353-500-99 12-MMB-030-11-D DB4-393 15811T200 20B1 LC630 2B1 1609080-2 1609993-8 1-6609070-1 F1100AA02 F1150CC10 F1500CA10 F1500CA15 F4041Z F7585E 1B1 FN2070A-16-06 FN2090A-20-06 FN2090B-12-06 FN2090Z-1-06 FN2410H-25-33 FN2410H-60-34 FN2410H-8-44 FN2412H-8-44 FN323B-6-01 FN3258H-130-35 FN610R-3-06 20EHQ7 20EHZ7 20K1 30B6 3K1