


## 300W, 9 to 53V Input Non-Isolated Ruggedized DC-DC Buck-Boost Converters

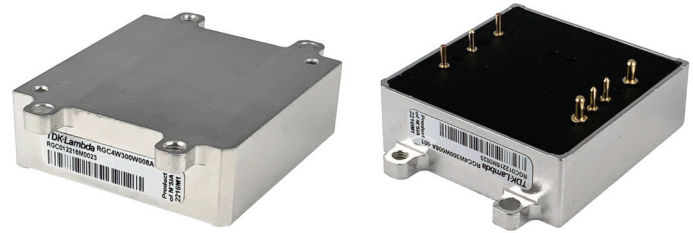

The rugged RGC non-isolated DC-DC step-up and step-down converters are encapsulated in a five-sided aluminum case and rated for up to 115°C operation. The modules have the industry standard 1/16th brick pin-out, are qualified to MIL-STD-810G (shock and vibration) and designed for fan-less, conduction cooled applications. The series accepts a wide input range to support multiple DC bus and battery voltages. Standard features include remote on/off, remote sense and output trim while a full feature adds power good, frequency synchronization and output current monitoring, making the modules a truly versatile board mount power solution. The wide output adjustment range allows one model to be used in multiple positions, assisting inventory and part number reduction.

Features	Benefits
• Up to 300W in a 1/16th Brick-Pin-Out	• High Power Density, Less Board Area Needed
• Encapsulated in a 5-sided Aluminum case	• Improves EMI
• 115°C maximum case temperature	• Rugged deployment in harsh environment with high shock & vibration exposure
• Efficiency - Up to 97%	• Longer Battery Life / Low Power Consumed
• Wide Output Adjustment from 5 up to 48V	• One Part Supports Multiple System Voltages
• Wide Input Range from 9 to 53V	• Can Operate from Different DC Input Source Voltages
• Buck-Boost - maintains output regulation even when input varies	• Extends run times on battery-powered equipment

Model Selector						
Model	Input Voltage (V)	Output Voltage (V)	Max Current (A)	Max Power (W)	Negative Logic On/Off	Feature Set
<a href="#">RGC4W300W008A-001</a>	9 - 53	9.6 - 48	8	300	Yes	Standard
<a href="#">RGC4W300W008A-003</a>	9 - 53	9.6 - 48	8	300	Yes	Full
<a href="#">RGC4W300W012A-001</a>	9 - 53	5.0 - 28	12.5	300	Yes	Standard
<a href="#">RGC4W300W012A-003</a>	9 - 53	5.0 - 28	12.5	300	Yes	Full

Contact factory for other upcoming part number suffix options.


Related Products		
Type	Part Number(s)	Size (mm) / Description
Ruggedized DC-DC Buck Converter	<a href="#">RGA</a>	250W, Input 9-40V and Output 3.3-24V or, 9-53V Input and 3.3V up to 40V Output
DC-DC Buck-Boost Converter	<a href="#">i7C</a>	300W, Input 9-53V or 9-36V, Output 9.6-48V 8A, 5-28V 12.5A or 8-24V 20A
DC-DC Buck Converter	<a href="#">i7A</a>	500-750W, Input 18-60V or 18-32V, Output 3.3-24V 33A or 3.3-18V 45A
DC-DC Buck Converter	<a href="#">i6A4W</a>	250W, Input 9 -53V, Output 3.3-40V 10A or 3.3-15V 20A
Isolated DC-DC Converter	<a href="#">GQA</a>	120W Industrial, Input 9-36V, Isolated Quarter Brick
Non-Isolated DC-DC Converter	<a href="#">iBH</a>	80W/20A, 3.5-14Vin, 0.7 - 5.5Vout, DOSA Compatible
Non-Isolated DC-DC Converter	<a href="#">iCH</a>	85W/12A, 4.5-14Vin, 0.7 - 8.5Vout, DOSA Compatible
Input Filter	<a href="#">iDQ</a>	75V / 10A Filter
Evaluation Board	<a href="#">i7X-C01-EVK-S0</a>	Evaluation board with no module. Order required RGC part number separately.

Specifications			
Model		RGC4W300W008A	RGC4W300W012A
<b>Input</b>			
Input Voltage Range	Vdc	9 - 53	
Input Current (max)	A	25	
Standby Input Current	mA	0.25	
No Load Input Current	mA	5	
Turn-ON Input Voltage	Vdc	9.5	
Turn-OFF Input Voltage	Vdc	8.5	
Efficiency (typ)	%	93 - 97%	91 - 96%
Safety Certifications and Markings	-	CE, UKCA Mark	
<b>Output</b>			
Output Voltage Initial Setpoint	%	±2.5	±2.5
Output Voltage Tolerance	%	±4.0	±4.0
Line Regulation	%	0.8	0.8
Load Regulation	%	0.5	0.8
Ripple & Noise <sup>(2)</sup>	(step-down)	60	100
	(step-up)	300	350
External Load Capacitance	µF	330 - 3000	
Switching Frequency	kHz	250	
Overcurrent Protection Threshold (typ)	A	15	17
Overtemperature Protection	°C	130 case, shutdown - autorecovery	
Output Voltage Adjustment Range		See full specification for output trim equation.	
Remote Sense		(+ Sense, compensating up to 5% of output voltage	
Remove On/Off		Negative Logic	
Frequency Synchronization		See full specifications	
Current Monitoring (I <sub>mon</sub> )		See full specifications	
<b>Environmental</b>			
Operating Temperature (T <sub>case</sub> )	°C	-40 to 115	
Storage Temperature	°C	-55 to 125	
Humidity (non condensing)	%RH	10 - 95	
Altitude <sup>(3)</sup>	m	2000	
Cooling	-	Conduction Cooling	
Shock	-	MIL-STD-810G 516.6 Procedure I & IV	
Vibration		MIL-STD-810G 514.6 Procedure I, Cat 10	
Thermal Cycling Test (TCT)		Qualified to 700 cycles / -40 to 125°C, 60°C/minute ramp, 30minute dwell time	
<b>Other</b>			
Weight (max)	g	68.1	
Size (LxWxH)	mm	38.1 x 49.5 x 13.0	
		38.1 x 39.4 x 13.0 (Mounting tab excluded)	
Size (LxWxH)	Inches	1.50 x 1.95 x 0.51	
		1.50 x 1.55 x 0.51 (Mounting tab excluded)	
MTBF - Telcordia SR-332 (100% Load, 40°C)	MHrs	> 10	
Warranty	yrs	3	






## Notes

- (1) See website for detailed product [specifications](#).  
(2) Measured with one 330 µF electrolytic and one 22 µF ceramic capacitors, BW = 20MHz.  
(3) Contact Technical Support for operation at higher altitudes.


## Operating Range (RGC4W300W008A-001)

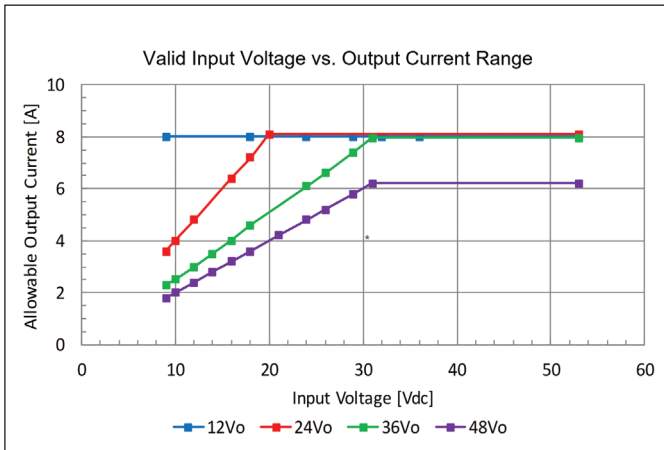


## Operating Range (RGC4W300W012A-001)

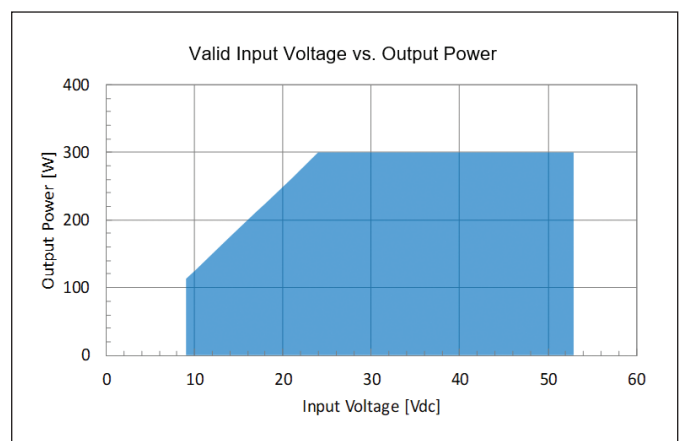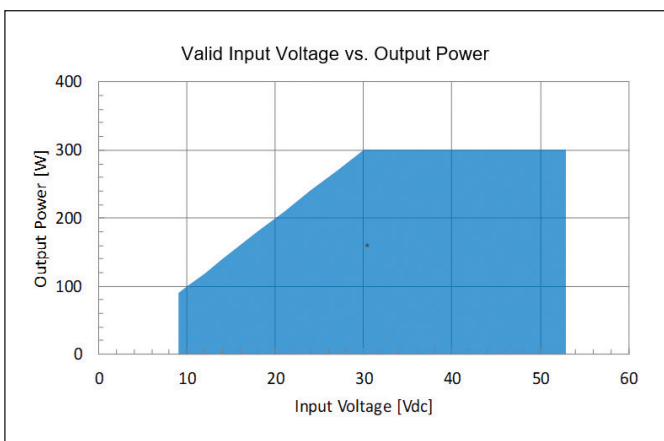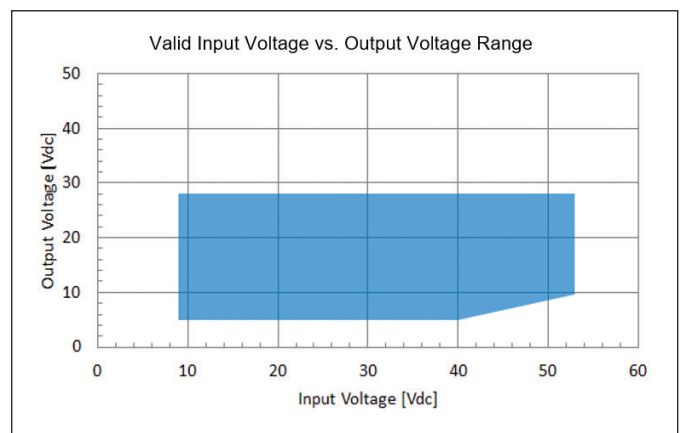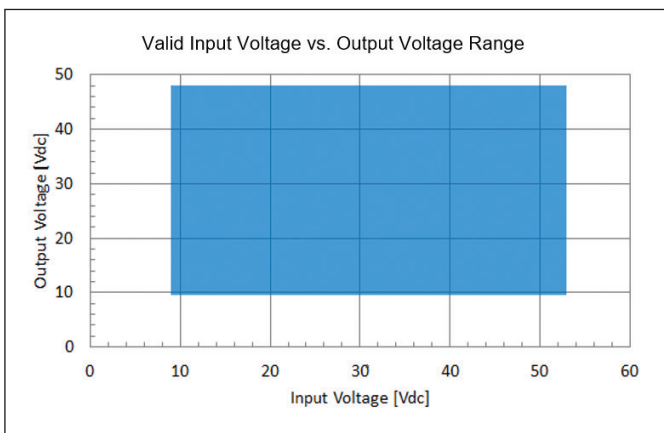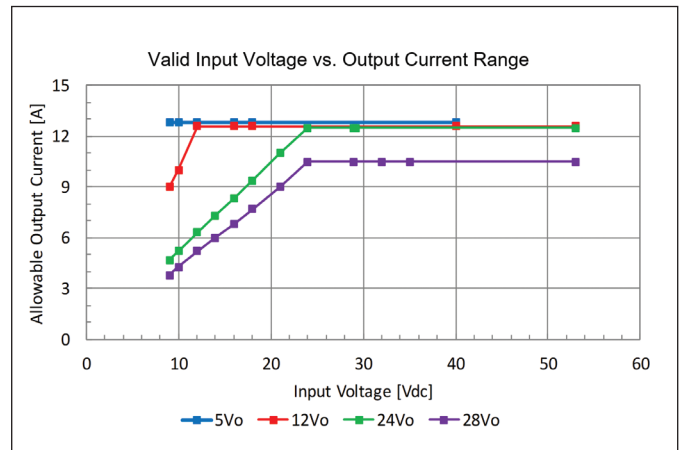


Typical Thermal Derating (RGC4W300W008A-001)

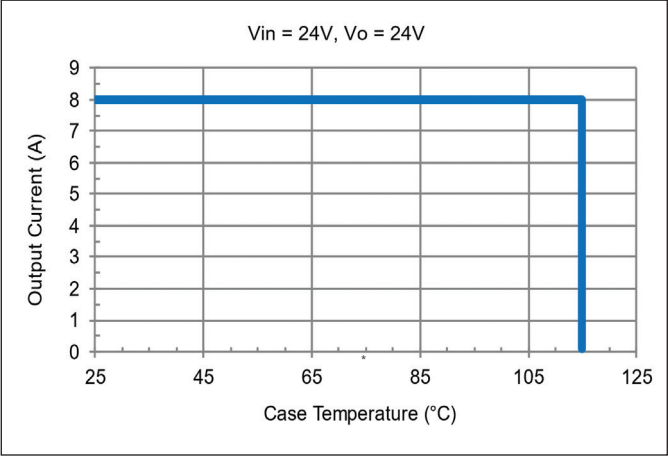

Typical Thermal Derating (RGC4W300W012A-001)

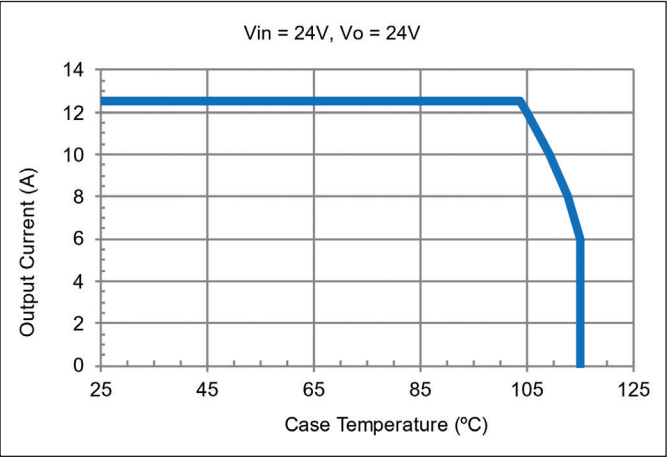


Typical Application Circuit

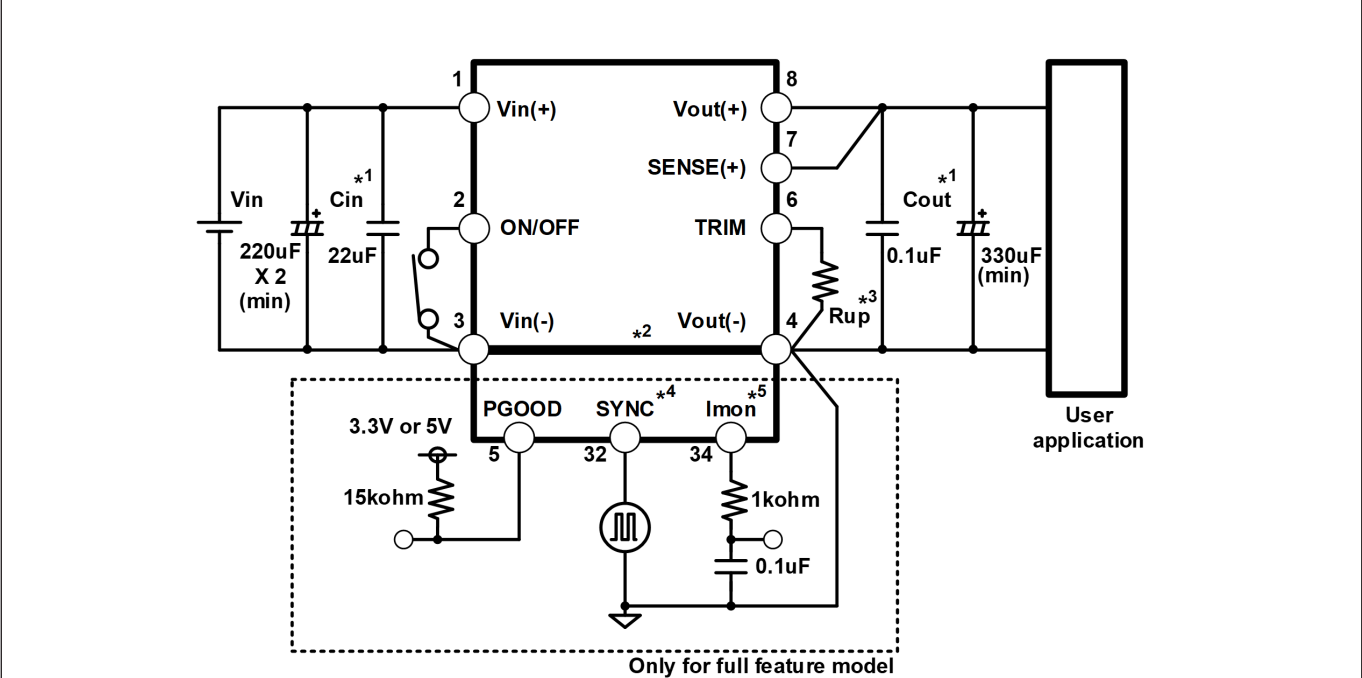


Recommendation

1. Cin/Cout MLCC should be connected to the RGC module as close as possible in order to reject high frequency noise.
2. Connect Vin(-) and Vout(-) to copper ground plane underneath the RGC module.
3. TRIM resistor "Rup" should be connected to the RGC module as close as possible.
4. SYNC must be connected to GND when not in use.
5. External R-C filter should be present when using Current Monitor.

## Mechanical Specification

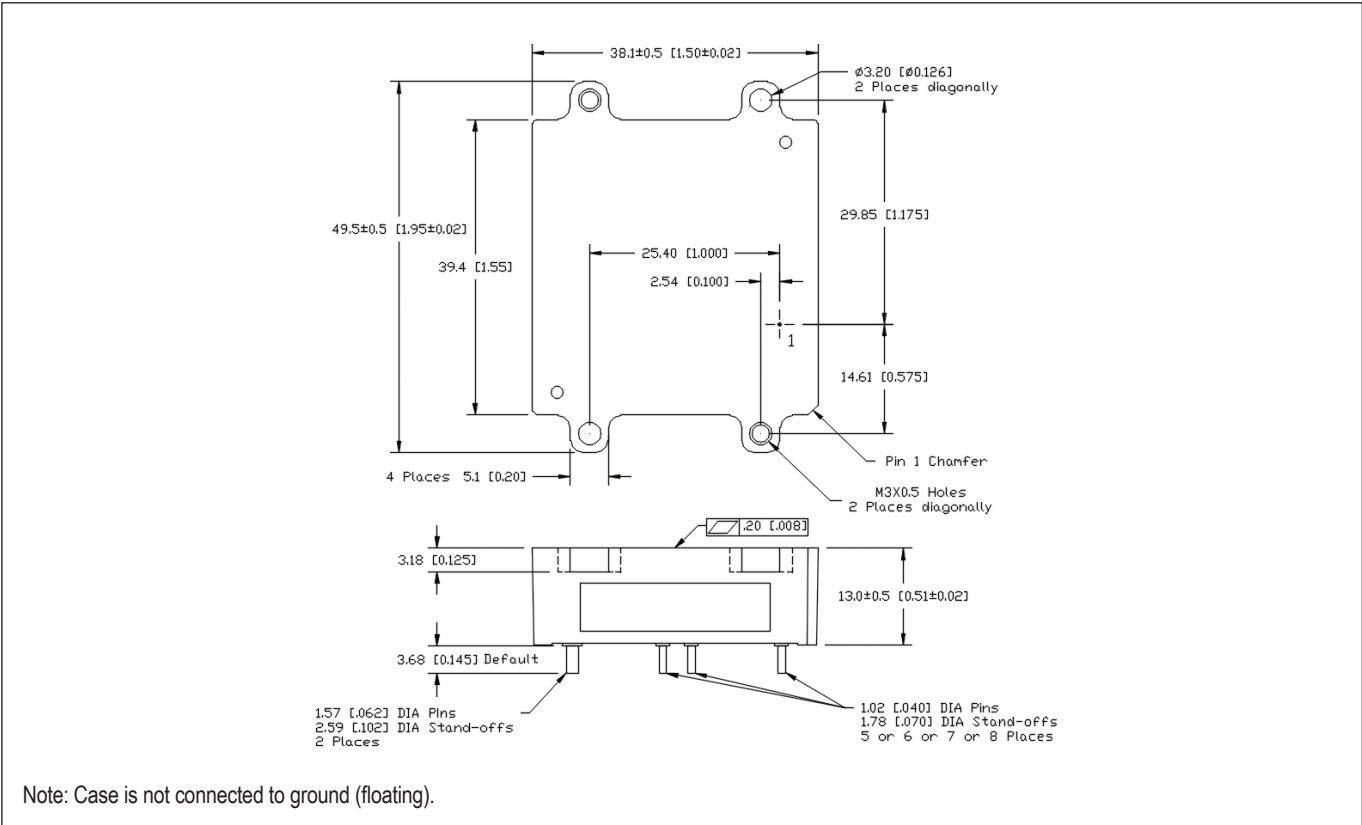

## Recommended PCB Hole Pattern

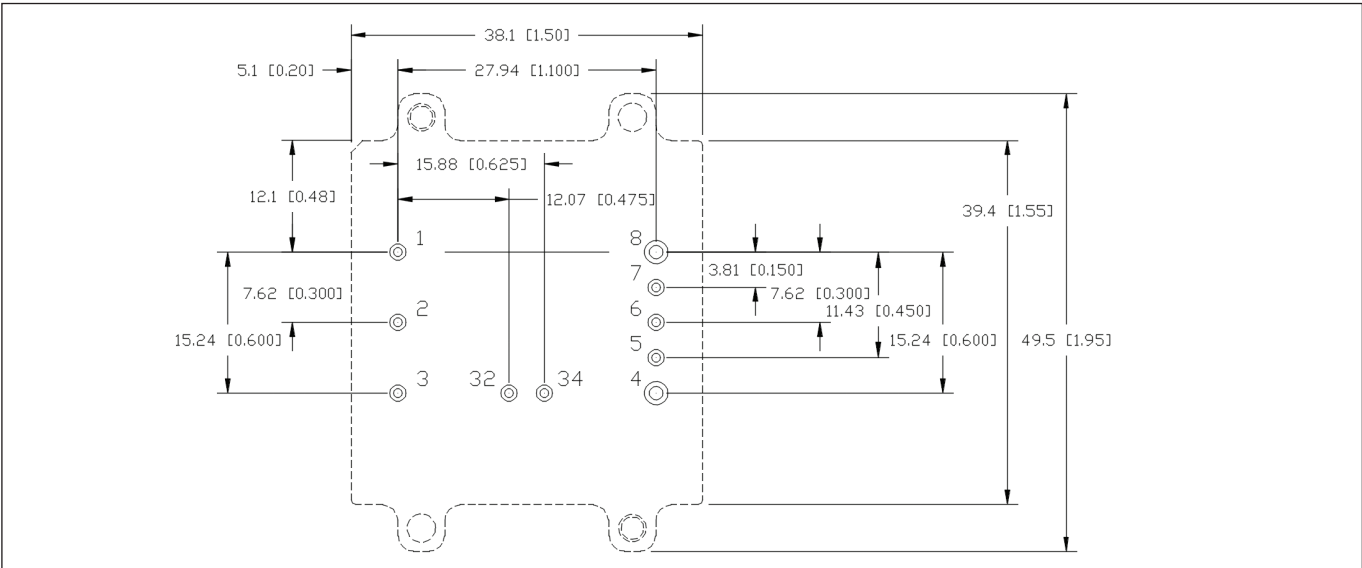

Pinout			
PIN	Function	PIN	Function
1	VIN(+)	6	TRIM
2	ON / OFF	7	SENSE (+)
3	VIN (-) / GND	8	VOUT (+)
4	VOUT (-) / GND	32	Sync (Option)
5	PWR GOOD (Option)	34	Current Monitor / Imon (Option)

Pin base material is brass or copper with gold over nickel plating.



**TDK-Lambda France SAS**

Tel: +33 1 60 12 71 65  
 ttf.fr.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/fr



**Italy Sales Office**

Tel: +39 02 61 29 38 63  
 ttf.it.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/it



**Netherlands**

ttf.nl.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/nl



**TDK-Lambda Germany GmbH**

Tel: +49 7841 666 0  
 tlg.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/de



**Austria Sales Office**

Tel: +43 2256 655 84  
 tlg.at.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/at



**Switzerland Sales Office**

Tel: +41 44 850 53 53  
 tlg.ch.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/ch



**Nordic Sales Office**

Tel: +45 8853 8086  
 tlg.dk.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/dk



**TDK-Lambda UK Ltd.**

Tel: +44 (0) 12 71 85 66 66  
 tlu.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/uk



**TDK-Lambda Ltd.**

Tel: +9 723 902 4333  
 tli.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/il-en



**TDK-Lambda Americas**

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
 tia.powersolutions@tdk.com  
 www.us.lambda.tdk.com



**TDK Electronics do Brasil Ltda**

Tel: +55 11 3289-9599  
 sales.br@tdk-electronics.tdk.com  
 www.tdk-electronics.tdk.com/en



**TDK-Lambda Corporation**

Tel: +81-3-6778-1113  
 www.jp.lambda.tdk.com



**TDK-Lambda (China) Electronics Co. Ltd.**

Tel: +86 21 6485-0777  
 tlc.powersolutions@tdk.com  
 www.lambda.tdk.com.cn



**TDK-Lambda Singapore Pte Ltd.**

Tel: +65 6251 7211  
 tis.marketing@tdk.com  
 www.sg.lambda.tdk.com



**TDK India Private Limited, Power Supply Division**

Tel: +91 80 4039-0660  
 mathew.philip@tdk.com  
 www.sg.lambda.tdk.com



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Non-Isolated DC/DC Converters](#) category:*

*Click to view products by [TDK-Lambda](#) manufacturer:*

Other Similar products are found below :

[DP8160G-S1-R1](#) [APTH003A0X-SRZ](#) [PROPOWER-3.3V](#) [JRCS016A0S4-HZ](#) [VI-920194B](#) [T31SN24005NMFA](#) [RPX-4.0-R](#) [RPM5.0-1.0-CT](#)  
[TPSM5D1806RDBR](#) [XC9291B33E0R-G](#) [R-78K3.3-0.5](#) [R-78K1.2-2.0L](#) [RPMGS12-20](#) [R-78K15-1.0](#) [R-78K2.5-2.0L](#) [R-78K15-2.0](#)  
[RGA4W250W010A-003](#) [R-78K5.0-0.5](#) [R-78K9.0-1.0](#) [RPX-0.5Q-R](#) [R-78K1.8-0.5](#) [RPMGQ12-20](#) [R-78K1.8-1.0](#) [R-78K2.5-0.5](#) [R-78K1.5-0.5](#)  
[RGC4W300W008A-001](#) [R-78K12-0.5](#) [R-78K2.5-2.0](#) [R-78K1.2-2.0](#) [R-78K9.0-2.0L](#) [R-78K1.8-2.0L](#) [R-78K1.5-2.0L](#) [RGA24250W014A-001](#)  
[RGC4W300W012A-001](#) [R-78K9.0-2.0](#) [RPMGS5.0-20](#) [RGC4W300W012A-003](#) [RPY-1.5Q-R](#) [R-78K3.3-1.0](#) [R-78K1.8-2.0](#)  
[RGA4W250W010A-001](#) [R-78K3.3-2.0L](#) [R-78CK12-0.5](#) [R-78K2.5-1.0](#) [R-78CK3.3-0.5](#) [R-78K12-1.0](#) [R-78K1.5-2.0](#) [R-78K5.0-2.0](#)  
[RGC4W300W008A-003](#) [RGA24250W014A-003](#)