

RTHC SERIES

High Attenuation Three-Phase Filter with Many Current Variations (Cube Type)




FEATURES

- 6 to 300A wide range lineup.
- Cube shape with L2 high attenuation .
- Small base and short connection width.
- Self-tightening screws and an open/close type cover make wiring work easier.
- Terminal block cover included for safety.

SAFETY STANDARDS


UL1283 UL File No. E62388 (Up to 150A)
 EN60939-1/-2 (ENEC14) Licence Ref. No. SE/07115-4

PRODUCT IDENTIFICATION

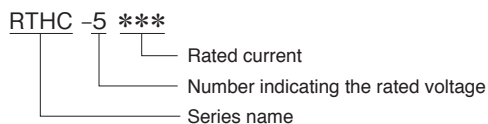

CONFORMITY TO RoHS Directive


CIRCUIT DIAGRAM

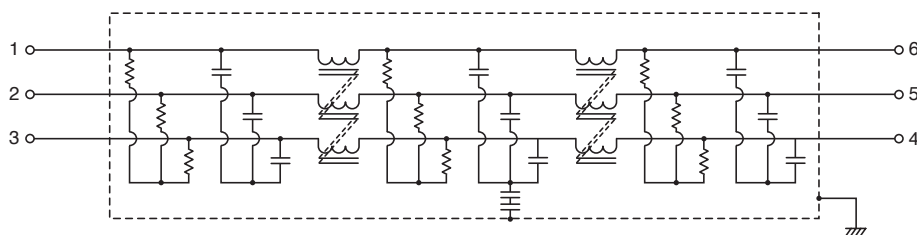

ELECTRICAL CHARACTERISTICS


Part No.	Rated voltage (AC/DC)	Rated current (AC/DC)	Withstand voltage	Insulation resistance	Leakage current	Operating temperature range	With derating over	DC resistance (mΩ)	Attenuation frequency range (MHz)		Weight (kg)
									Common mode	Differential mode	
									at 25dB	at 25dB	
RTHC-5006	500V	6A	AC.2500V 60s [Between line to ground]	100MΩ min. [DC.500V/ 1min]	2.5mA max. [250V/60Hz] 5mA max. [500V/60Hz]	-25 to +85°C	50°C	290 max.	0.1 to 10	0.2 to 30	0.80
RTHC-5010		10A						120 max.	0.1 to 10	0.2 to 30	0.82
RTHC-5020		20A						50 max.	0.1 to 10	0.2 to 30	1.20
RTHC-5030		30A						26 max.	0.2 to 10	0.2 to 30	1.20
RTHC-5040		40A						20 max.	0.2 to 10	0.2 to 30	2.26
RTHC-5050		50A						14 max.	0.2 to 10	0.2 to 30	2.26
RTHC-5060		60A						10 max.	0.2 to 10	0.2 to 30	2.26
RTHC-5080		80A						10 max.	0.1 to 10	0.2 to 30	7.40
RTHC-5100		100A						8 max.	0.1 to 10	0.2 to 30	7.80
RTHC-5150		150A						6 max.	0.1 to 10	0.2 to 30	12.00
RTHC-5200		200A						4 max.	0.3 to 10	0.2 to 30	16.30
RTHC-5250		250A						3 max.	0.3 to 10	0.2 to 30	15.60
RTHC-5300		300A						2 max.	0.5 to 6	0.2 to 30	14.80

DERATING GRAPH

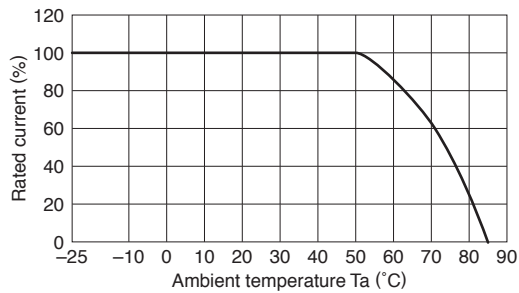


MECHANICAL

RTHC-5006/5010/5020/5030/5040/5050/5060/5080/5100/5150

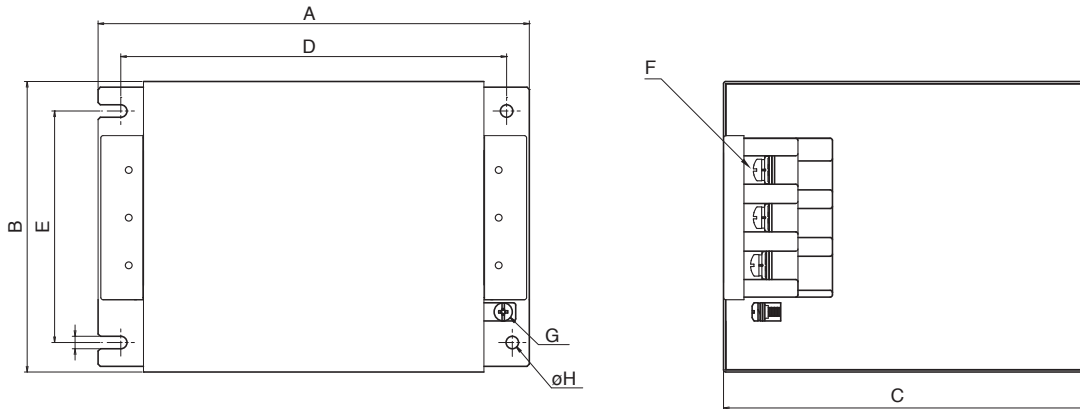

RTHC-5200/5250/2300

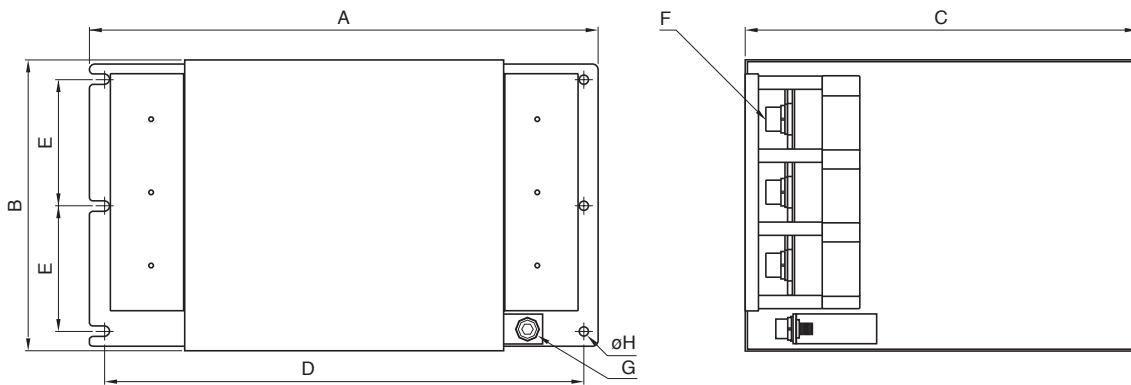


Dimensions in mm


Part No.	A	B	C	D	E	F	G	φ H	Recommended clamping torque
RTHC-5006	145	95	120	130	78	M4	M4	4.5	M4 : 1.27N · m M5 : 2.5N · m M6 : 4.8N · m M8 : 7.64N · m M10 : 11.8N · m
RTHC-5010									
RTHC-5020	160	105	135	145	85	M4	M4		
RTHC-5030									
RTHC-5040	190	128	160	170	102	M5	M4	5.5	
RTHC-5050									
RTHC-5060									
RTHC-5080	240	161	210	220	135	M8	M6	6.5	
RTHC-5100									
RTHC-5150	255	190	232	235	164	M8	M6	6.5	
RTHC-5200	340	195	262	320	84.5	M10	M8	6.5	
RTHC-5250									
RTHC-5300									

■ ATTENUATION vs. FREQUENCY CHARACTERISTICS


RTHC-5006

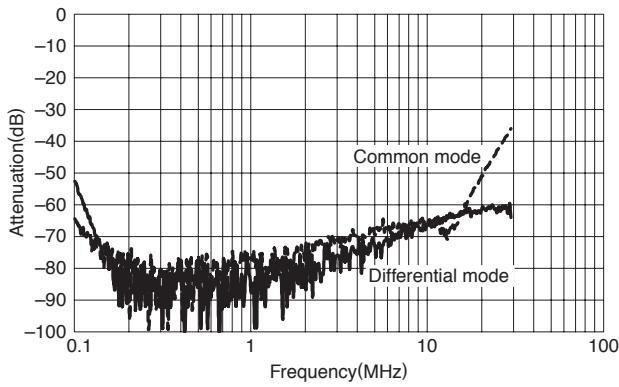


RTHC-5010

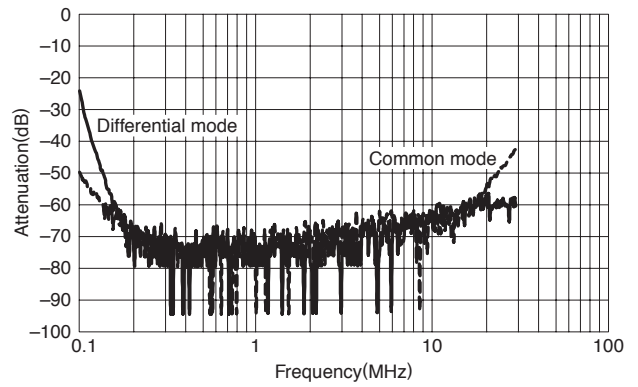


RTHC-5020

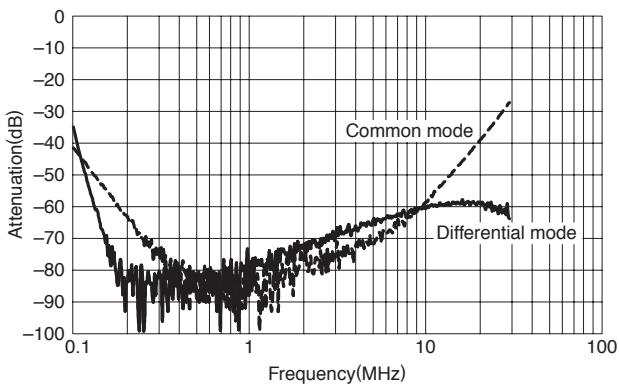


RTHC-5030

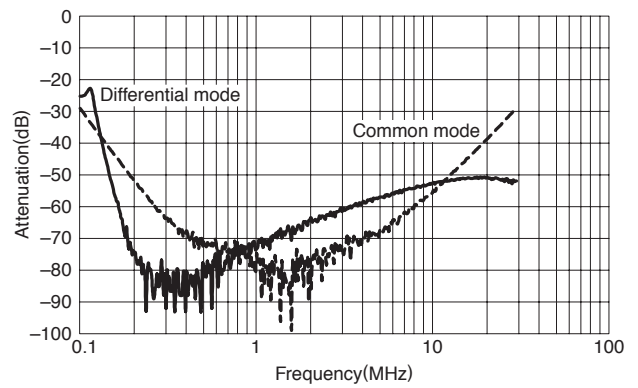


RTHC-5040

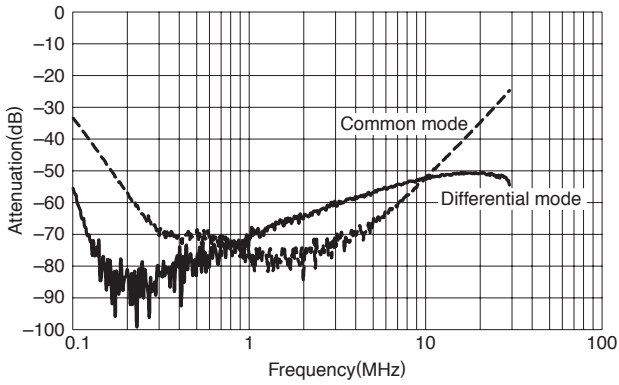


RTHC-5050

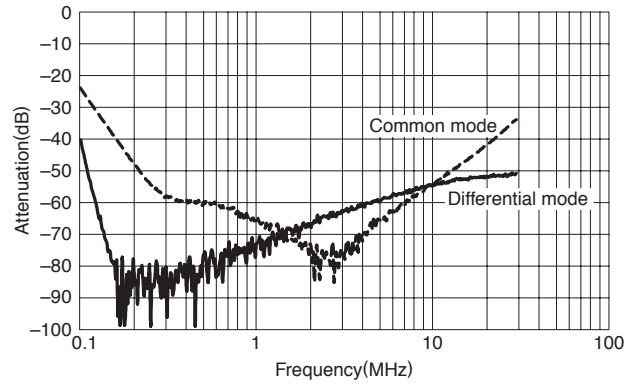


RTHC-5060

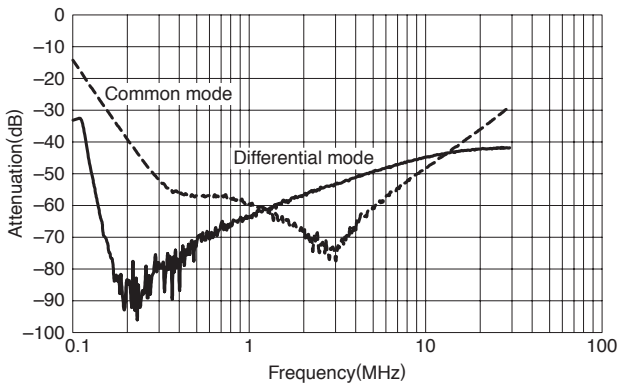


RTHC-5080

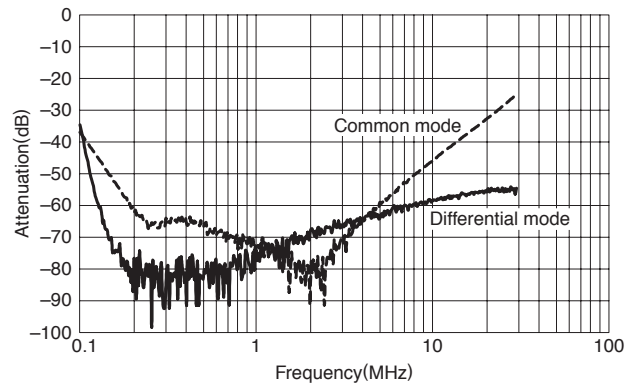


RTHC-5100

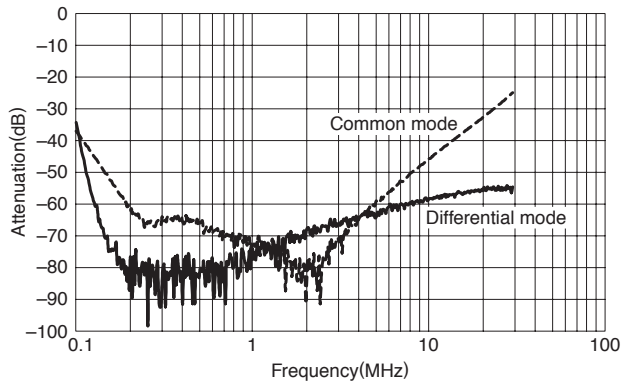


RTHC-5150

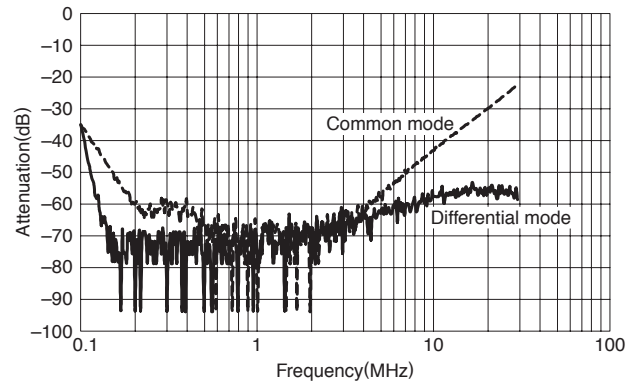


RTHC-5200

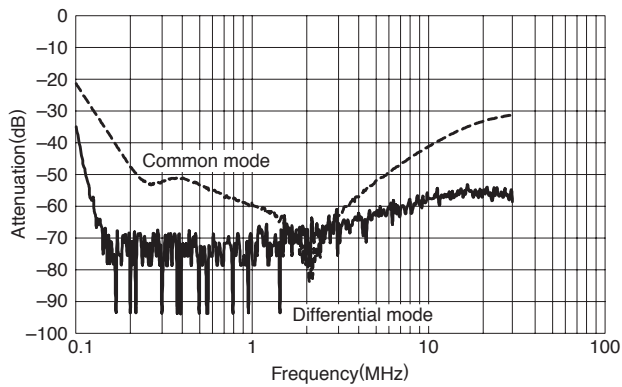

RTHC-5250

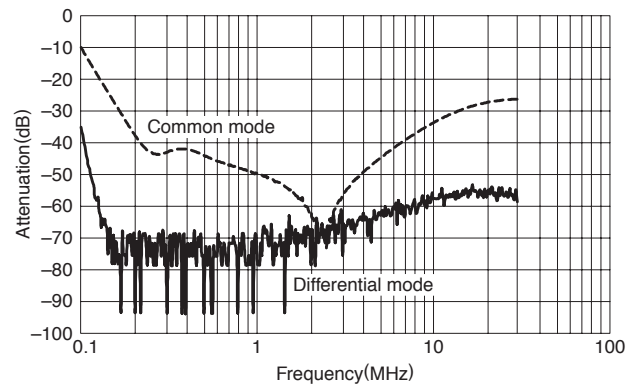

RTHC-5300

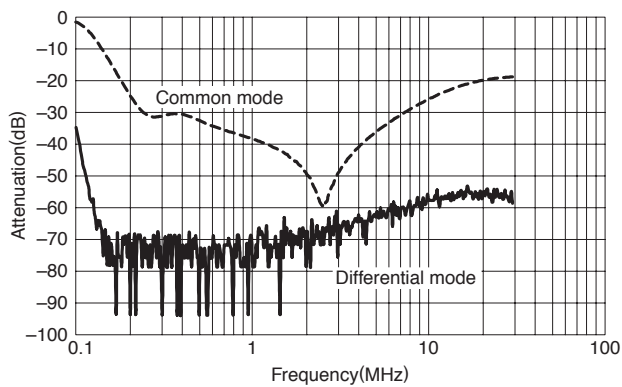

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Line Filters](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[6609019-3](#) [6609026-5](#) [6609030-6](#) [6609973-2](#) [D30A](#) [7-1609090-5](#) [F2810](#) [F4456A](#) [F7382Z](#) [F7863Z](#) [FAHAV3100ZC000](#) [806276](#) [FN2020B-1-06](#) [FN2080B-10-06](#) [FN2410H-32-33](#) [FP144](#) [FS4153-20-06](#) [FS4353-500-99](#) [12-MMB-030-11-D](#) [DB4-393](#) [15811T200](#) [20B1](#) [LC630](#) [2B1](#) [1609080-2](#) [1609993-8](#) [1-6609070-1](#) [F1100AA02](#) [F1150CC10](#) [F1500CA10](#) [F1500CA15](#) [F4041Z](#) [F7585E](#) [1B1](#) [FN2070A-16-06](#) [FN2090A-20-06](#) [FN2090B-12-06](#) [FN2090Z-1-06](#) [FN2410H-25-33](#) [FN2410H-60-34](#) [FN2410H-8-44](#) [FN2412H-8-44](#) [FN323B-6-01](#) [FN3258H-130-35](#) [FN610R-3-06](#) [20EHQ7](#) [20EHZ7](#) [20K1](#) [30B6](#) [3K1](#)