


## 40-60W, 3 x 5" AC-DC Power Supplies

### Features

- ◆ Low Cost
- ◆ Single and Multiple Outputs
- ◆ Wide Range AC Input
- ◆ Low profile
- ◆ Global Safety Agency Compliance
- ◆ Meets EN61000-4 (-2 to -6)
- ◆ Industry standard footprint

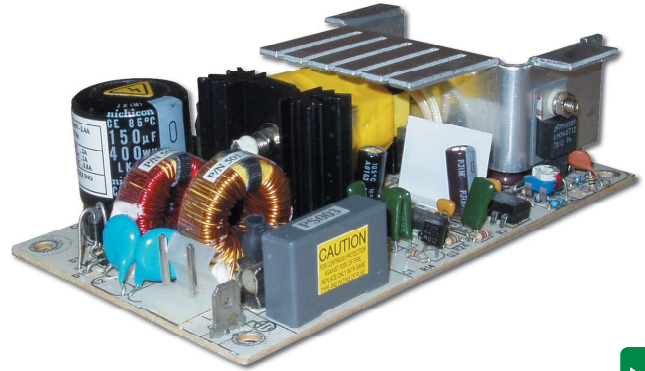

### Key Market Segments & Applications



Specifications		SCS40	SCT4x	SCS60	SCD60	SCT6x
Output Power Convection	W	40		60		
Output Power Forced Air	W	55		-		
Main Output Adjustment	V	-5, +10% O/P 1 only		-5, +10%		
Line and Load Regulation	%	Output 1: ±2%, Output 2: ±5% (±7% on 24V models), Output 3: ±5%				
Hold Up Time (typical)	ms	20		20		
Size (1)	in	3 x 5 x 1"		3 x 5 x 1.34"		
AC Input	-	85-265 VAC, 47-63 Hz				
Efficiency	%	Typically 70% full load at nominal AC Line				
Inrush Current Limiting	A	36A typical @230VAC cold start				
Surge Immunity	-	EN61000-4 (-2 through -6) level 3				
EMI	-	FCC Class B, EN55022 B				
Cross Regulation	%	± 2% on output 1, ±5% on outputs 2 & 3 (multiple outputs only)				
Ripple and Noise	%	1% peak to peak				
Overcurrent Protection	-	Short circuit protection, automatic recovery				
Overvoltage Protection	-	Output 1 only, <135%				
Cooling	-	When specified with forced air cooling, flow is 300 LFM (1.5m/s)				
Operating Temp. Range (2)	-	0 to +70°C (Derate linearly to 50% load from 50-70°C)				
Storage Temperature	°C	-20 to +85°C				
Safety Agency Approval	-	UL60950-1, CSA60950-1, IEC/EN60950-1, CE Mark				
Warranty	yr	1 year				

(1) Height is specified as maximum component height

Note: See Installation Manual for full details, test methods of parameters and application notes

(2) -40°C startup, contact factory for details.

**Last time buy date April 2019 (excludes SCT63)**

Options							
	Model	O/P (V)	Min Load(A)	Convec. (A)	Forced Air(A)	Peak Load(A)**	
Single Output	SCS4024	V1 24.0	-	1.6	2.3	2.5	
	SCS4048	V1 48.0	-	0.9	1.2	1.3	
	SCS6012	V1 12.0	-	5.0	6.7	7.5	
	SCS6024	V1 24.0	-	2.5	3.3	3.8	
	SCS6028	V1 28.0	-	2.1	2.9	3.2	
	SCS6048	V1 48.0	-	1.3	1.7	1.9	
Dual Output	SCD601515	V1 15.0	0.2	2.2	2.9	-	
		V2 -15.0	0.2	1.8	2.4	-	
Triple Output	SCT42	V1 5.0	0.4	4.0	5.0	7.0	
		V2 12.0	0.2	2.0	2.5	4.0	
		V3 -12.0	-	0.5	0.7	1.0	
	SCT45	V1 5.0	0.4	4.0	5.0	7.0	
		V2 15.0	0.2	2.0	2.5	3.0	
		V3 -15.0	-	0.5	0.7	1.0	
	SCT48/R*	V1 5.0	0.4	4.0	5.0	6.0	
		V2 24.0	0.1	1.0	1.5	2.0	
		V3 -5.0	-	0.5	0.7	1.0	
	SCT62	V1 5.0	0.7	7.0	-	10.0	
		V2 12.0	0.3	3.0	-	6.0	
		V3 -12.0	-	0.7	-	1.5	
SCT63	V1 5.0	0.7	7.0	-	10.0		
	V2 15.0	0.3	2.8	-	4.0		
	V3 -15.0	-	0.7	-	1.5		
SCT65	V1 5.0	0.7	7.0	-	10.0		
	V2 24.0	0.1	1.5	-	3.0		
	V3 12.0	-	0.7	-	1.5		


Model Selector Notes:

\* /R = Remote Sense. Leave unconnected when not used.

\*\* <30s, 10% duty cycle, average power must not exceed maximum ratings.

Other AC-DC Products	
ZP	20 to 60W 2" x 4", 1-3 outputs
NV175	175W 3" x 5", 1-5 outputs
ZWS	5 to 240W single output, universal input
VS, VSC, VSP	10 to 150W single output, 115VAC input
SCS120PW	120W 3" x 5" single output
CSS150	150W 3" x 5" single output

## Outline Drawing

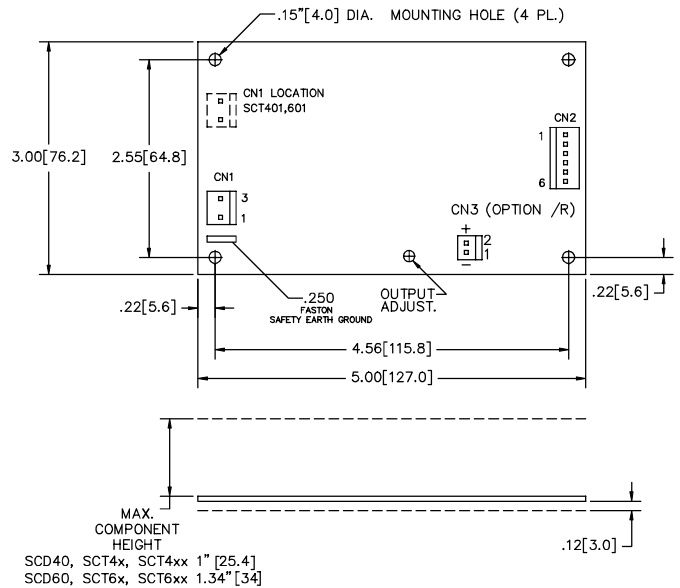

### NOTES:

1. DIMENSIONS SHOWN IN INCH [mm]

2. TOLERANCE .02 [0.5] MAXIMUM

3. MATING CONNECTORS:

CN1	MOLEX	09-50-8031
CN2	MOLEX	09-50-8061
CN2	MOLEX	09-50-8071 (SCT401/601)
CN1, 2 PINS	MOLEX	08-52-0113
CN3	MOLEX	22-01-3027
CN3 PINS	MOLEX	08-50-0114

For Additional Information, please visit  
[us.tdk-lambda.com/lp/products/sc-series.htm](http://us.tdk-lambda.com/lp/products/sc-series.htm)



Last time buy date April 2019 (excludes SCT63)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [TDK-Lambda](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)  
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)  
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#)  
[LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-1219-](#)  
[18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-0028G](#) [VI-](#)  
[LUL-EU](#) [EP3000AC48INZ](#) [VP-C2104853](#)