

240W 24V Output Power Supply with EN62477-1 OVC III

Features

- ◆ Certified to IEC/EN62477-1 OVC III
- ◆ 12 Year e-cap Lifetime
- ◆ 5 Year Warranty
- ◆ Convection Cooling



Key Market Segments & Applications



Industrial



RoHS


Specifications		ZWS240RC-24	
Model		ZWS240RC-24	
Nominal Output Voltage	V	24V	
Maximum Output Current	A	10A	
Maximum Output Power	W	240W	
Efficiency (typ)	%	87 / 90% (100 / 200VAC)	
AC Input Voltage range (1)	-	85 - 265VAC (47 - 63Hz)	
Input Current (typical) (2)	A	2.8 / 1.5A	
Inrush Current - cold start (2)	A	15 / 30A	
PFHC	-	Active Power Factor Correction - Designed to meet EN/IEC61000-3-2	
Power Factor (2)	-	0.93 / 0.9	
Output Voltage Accuracy	%	±2%	
Output Voltage Range	VDC	21.6 - 26.4V	
Ripple and Noise (pk-pk)	mV	200mV (0 to +70°C) (Maximum)	
Line Regulation	mV	96mV (Maximum)	
Load Regulation	mV	150mV (Maximum)	
Temperature Coefficient	%/°C	<0.02%/°C	
Overcurrent Protection	-	>10.5A	
Overvoltage Protection	V	27.6 - 32.4V (Cycle AC to reset)	
Hold Up time (Typ) (2)	ms	31ms	
Leakage Current (Typ) (3)	mA	0.2 / 0.4mA	
Cooling	-	Convection	
Operating Temperature (4)	°C	-10°C to +70°C, derate linearly to 30% load from 50°C to 70°C	
E-cap lifetime (5)	Years	Up to 12 years; 50°C ambient, 100% full load, 24 hours a day operation	
Storage Temperature	°C	-30°C to +75°C	
Humidity (non condensing)	%RH	Operating: 30 - 90%RH, Storage: 10 - 90%RH	
Withstand Voltage	VAC	I/P to Gnd 2kVAC (10mA), I/P to O/P: 3kVAC (10mA), O/P to Gnd: 500VAC (20mA) for 1min	
Isolation Resistance	Ω	>100MΩ at 25°C & 70%RH, Output to Gnd: 500VDC	
Vibration (non operating)	-	10 - 55Hz (1 minute sweep), 19.6 m/s ² constant X, Y, Z 1 hour each	
Shock	-	<196.1m/s ²	
Safety Agency Certifications	-	IEC/EN/UL/CSA60950-1, IEC/EN/UL/CSA62368-1, EN62477-1 (OVC III) and CE Mark	
Conducted Emission	-	EN55011 / EN55032-B, FCC-B, VCCI-B	
Radiated Emission	-	EN55011 / EN55032-A, FCC-A, VCCI-A	
Immunity	-	IEC61000-6-2 ; IEC61000-4-2, -3, -4, -5, -6, -8, -11	
Weight (Typ)	g	520g	
Size (W x H x D)	mm	84 x 42 x 180mm	
Warranty	Years	Five Years	

Notes:

- (1) Derate linearly to 80% load from 90 to 85VAC input
 (2) 100/200VAC, full load
 (3) 100/230VAC

- (4) Refer to Application Notes
 (5) Refer to Reliability Data

Outline Drawing

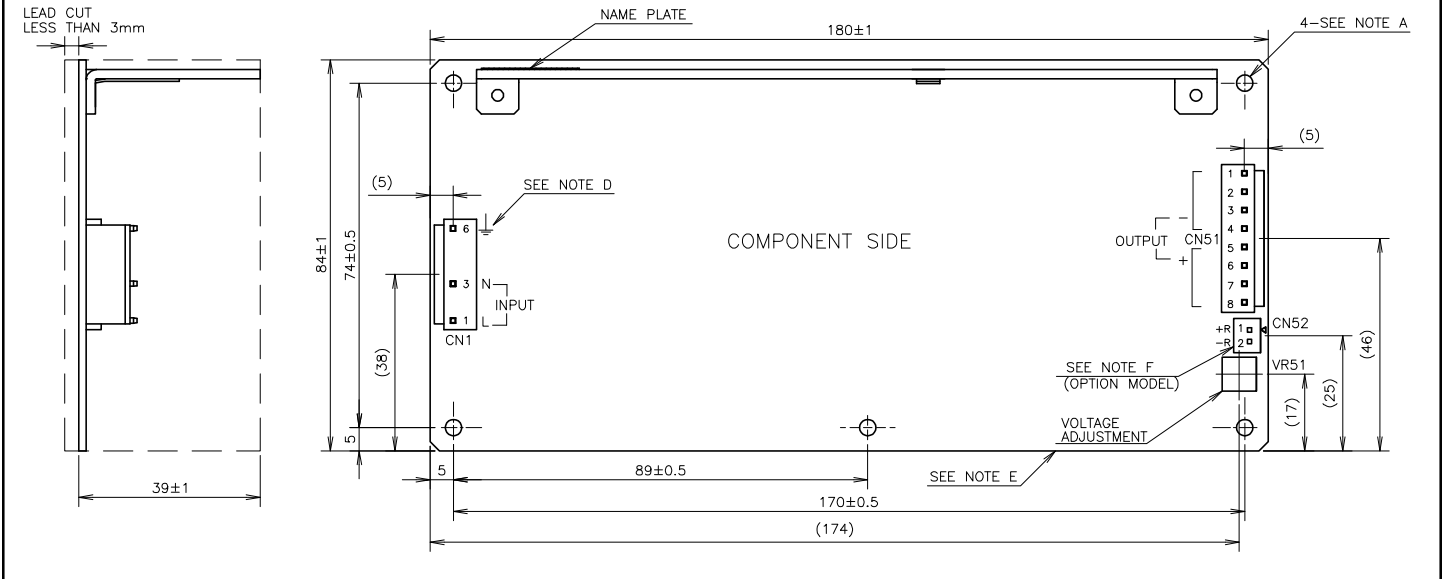

For Additional Information, please visit
<https://product.tdk.com/info/en/products/power/index.html>



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#)
[LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-1219-](#)
[18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-0028G](#) [VI-](#)
[LUL-EU](#) [EP3000AC48INZ](#) [VP-C2104853](#)